

WHIPS



Liquid Tight Installation Whips



Pre-Assembled Whips Include:

- Non-Metalic Liquid Tight conduit (cUL listed)
- 2 One-piece non-metal PVC fittings applied (cUL listed)
 - 1 straight Liquid Tight fitting
 - 1 90° Liquid Tight fitting
- 2 reducing washers on 1/2" whips
- 11" wire exposure each end

Part #	Size	Length	Gauge
11-4500	1/2"	4'	10
11-6500	1/2"	6'	10
11-6524*	1/2"	6'	10
11-6750	3/4"	6'	8

* 11-6524 has 23" exposed wire each end - Rheem Ruud Special

A/C BRACKETS

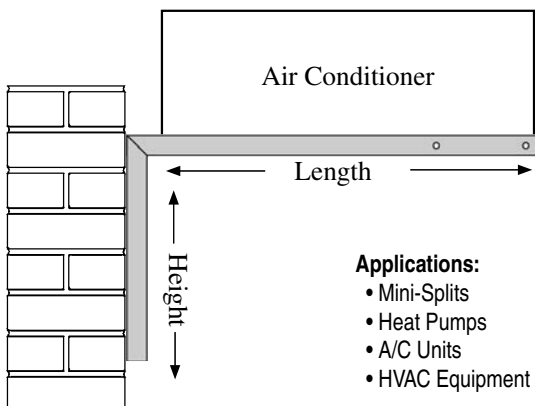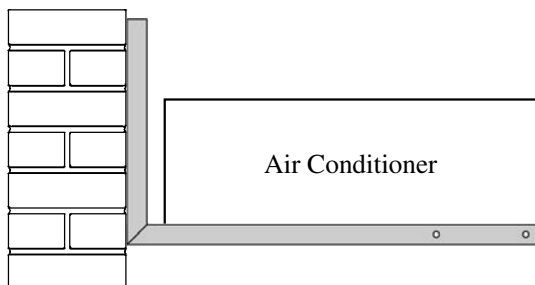

Applications:

- Mini-Splits
- Heat Pumps
- A/C Units
- HVAC Equipment

A/C Wall Brackets

- Full range of sizes
- Reversible mounting
- Heavy-duty steel
- Elongated mounting holes
- Standard colour - Black
- Extra holes for fastening equipment

Part #	Length	Height
79-WB2416BLK	24"	24"
79-WB2618BLK	26"	18"
79-WB3014BLK	30"	14"
79-WB3018BLK	30"	18"
79-WB3618BLK	36"	18"
79-WB3624BLK	36"	24"

VISIT US ON THE WEB @

www.alltemp.ca

CONDUIT



Applications:

- HVAC Equipment
- Refrigeration Units
- Pumps
- Machine Tools
- Marine Equipment
- Motors & Controls
- Printing Equipment

Liquid Tight Flexible Conduit

- Rigid coils combined with flexible PVC construction provide superior wire protection in a variety of extreme environmental & application conditions
- Resilient to abuse, pulling or crushing
- Smooth inside for easier wire feeding & pulling
- Use with nylon straight or 90° Liquid Tight connectors
- Metallic connectors can be used for Liquid Tight conduit
- Temperature range: -18°C to 75°C
- UL listed, CSA Certified

Part #	Size	Length
11-8431	1/2"	100'
11-8432	3/4"	100'

FITTINGS



Straight Connector

Applications:

- Indoor or outdoor use
- OEM equipment
- Field installations




90° Connector

Liquid Tight Non-Metal Connectors

- Installation - simply push conduit onto ferrule, then tighten the domed sealing nut. The completed assembly is then secured to the chassis using the locknut.
- Conduit & connector system is completely reusable.
- Nylon construction
- Standard colour - Gray
- Resists salt water, weak acids, gasoline, alcohol, oil, grease & most common solvents
- UL listed, CSA certified

Part #	Size	Description
11-88403	1/2"	Straight Connector
11-88418	1/2"	90° Connector
11-PS0509NGY	1/2"	Swivel Connector
11-88405	3/4"	Straight Connector
11-88420	3/4"	90° Connector
11-PS0759NGY	3/4"	Swivel Connector

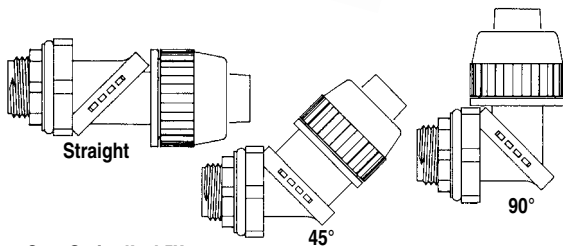

One SwivelLok™ Connector Fits Any Position

ALLTEMP PRODUCTS COMPANY LIMITED

827 Brock Road South • Pickering ON Canada • L1W 3J2

Toronto (416)798-7648 • Phone (905)831-3311

Order Desk 1 800 263-4624 • Fax (905)831-1864

sales@alltemp.ca • www.alltemp.ca