

ALLTEMP

a **DIVERSITECH** company

24-ICM517 SURGE PROTECTOR

Protects Against Lightning & Voltage Surges
Limited Lifetime Protection Warranty
Highest Protective Ratings Available

Features:

- Easy installation
- Highest performance ratings - up to 100,000 Amp surge capacity
- Rugged non-flammable metal case
- UL 1449, 4th edition
- NEMA Type 3R enclosure
- Dual voltage (120/240V, 1PH)
- Green light indicated surge protection present

Specifications:

Service Voltage:

120/240 volt, single phase

Maximum Surge Current:

100,000 Amps

Nominal Discharge Current Rating:

50kA

Maximum Energy Dissipation:

1,020 Joules

AC Protection Modes:

L-L, L-N, L-G, N-G

Conduit Connection:

3/4"

Dimensions:


5.0" L x 2.78" W x 2.16" D

Weight:

0.55 lbs.



Wiring Diagram

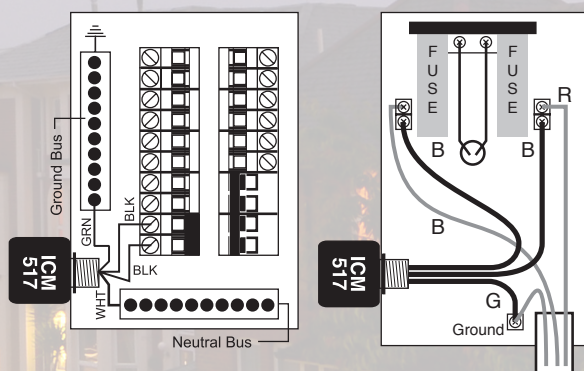

Indoor Installation
(240 VAC Shown)

Outdoor Installation
(240 VAC Shown)

ICM
CONTROLS™