

Product Family

T34 Series Transformers
Class 2, UL 1585 Recognized

Description

These transformers provide the power source for heating, air conditioning, or refrigeration systems. They are multi-mounted with wire connection secondary.

Features

- Cost effective
- Easy to install
- UL 1585 Recognized

Application

HVAC power source

Specifications

Primary Voltage:
120 VAC
120/208/240 VAC

Secondary Voltage:
24 VAC

Lead Wire:
18 AWG, 9.8 in

Connection:
Screw Terminal (T3401, T3403, T3501)

Operating Temperature:
23° F – 86° F
-5°C - 30°C

Mounting:
Foot Mounting
Conduit Mounting (T5401)

Certifications:
UL 1585 Recognized

Warranty:
1 year



T3401



T3403







T3501



T5401



Wiring Diagrams

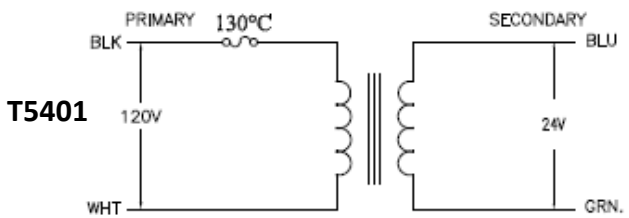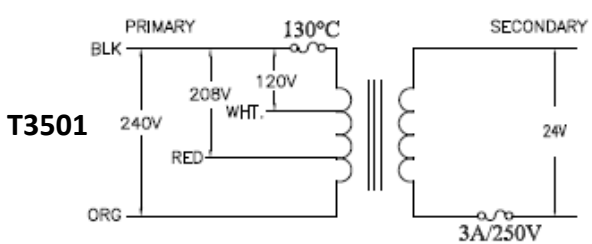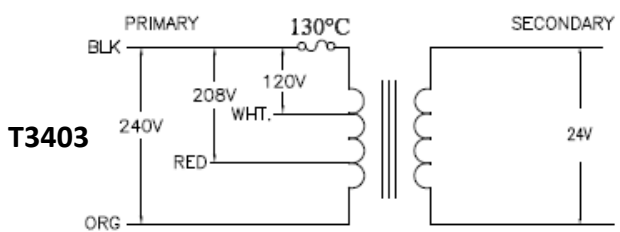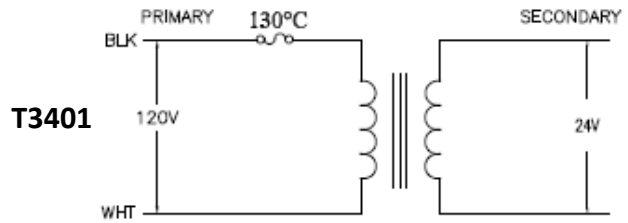

| STOCK NO | VA | Primary Voltage (VAC) | Secondary Voltage (VAC) | Dimensions (in) | Weight (lbs) | Mounting |
|----------|----|-----------------------|-------------------------|------------------------------|--------------|----------|
| T3401 | 40 | 120 | 24 | H = 4.5, W = 4.5, D = 3.75 | 2.4 | Foot |
| T3403 | 40 | 120/208/240 | 24 | H = 3.0, W = 4.5, D = 4.5 | 2.3 | Foot |
| T3501 | 50 | 120/208/240 | 24 | H = 2.5, W = 4.25, D = 4.25 | 2.42 | Foot |
| T5401 | 40 | 120 | 24 | H = 2.75, W = 4.25, D = 4.25 | 2.2 | Foot |



Simplify The Way You Work

6650 Sugarloaf Parkway, Duluth, GA 30097 Phone: 800-955-2222 Fax: 678-542-3700 www.diversitech.com

© 2015 Diversitech Corporation
All rights reserved.