



# FIRE PLACE

PELLET & WOOD | STOVE FAN KITS | BLOWERS  
MOTORS | ACCESSORIES

[www.alltemp.ca](http://www.alltemp.ca)

**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**



R7-RB440  
illustrated



R7-RB155  
illustrated



R7-RB447  
illustrated



R7-RB446  
illustrated



R7-RB445  
illustrated

**Dayton, Grainger** - Additional replacements on page 13 & 14

| Part #          | HP    | Volts | Amps | Type      | Spd/RPM | Rot | CFM | Frame | Bearing | Comment                                                     |
|-----------------|-------|-------|------|-----------|---------|-----|-----|-------|---------|-------------------------------------------------------------|
| <b>R7-RB440</b> | 1/125 | 115   | 0.25 | PSC/ Open | 1/3080  | CW  | 50  | 3.3"  | Ball    | 1TDN7, 4C440                                                |
| <b>R7-RB155</b> | 1/40  | 115   | 0.75 | PSC/TE    | 1/2480  | CW  | 148 | 3.3"  | Ball    | Grainger 1TDR6, 4C006, Fasco 7021-4933                      |
| <b>R7-RB447</b> | 1/25  | 115   | 0.77 | PSC/ Open | 1/1640  | CW  | 273 | 3.3"  | Ball    | Grainger 1TDR3, 4C447                                       |
| <b>R7-RB446</b> | 1/20  | 115   | 0.75 | PSC/ Open | 1/3120  | CW  | 146 | 3.3"  | Ball    | Grainger 1TDP7, 4C446, Fasco 7021-3469, Wood Doctor Furnace |
| <b>R7-RB445</b> | 1/6   | 115   | 2.20 | PSC/ Open | 1/1430  | CW  | 549 | 3.3"  | Ball    | 1TDT2, 4C445, 4YJ32                                         |

R7-RB440 Includes intake screen guard, round discharge - round flange.

## Elmira

Elmira Wood Stove 1500, 1600

| Part #         | HP   | Volts | Amps | Type     | Spd/RPM | Rot | Body | Frame | Bearing | Shaft           |
|----------------|------|-------|------|----------|---------|-----|------|-------|---------|-----------------|
| <b>HM-R489</b> | 1/60 | 115   | 0.72 | SP/ Open | 3/1300  | CW  | 2.5" | 3.3"  | Sleeve  | 3.6"×5/16"×3.5" |



## Elmira

Wood Stove Blower

| Part #         | HP   | Volts | Amps | Type     | Spd/RPM | Rot | CFM | Body | Frame | Bearing |
|----------------|------|-------|------|----------|---------|-----|-----|------|-------|---------|
| <b>R7-RB34</b> | 1/25 | 120   | 0.60 | ECM/Open | 1/2800  | CW  | 73  | 6.6" | 3.3"  | Ball    |


HB-RB34 Includes intake screen guard, built-in variable speed control, 3-prong plug, round discharge - large square flange.



## Enviro

Enviro EFW261, EF1000, 1600, 2160, 1200, 1700

| Part #          | Watts | Amps | Volts | RPM  | Rot | CFM | Blower         | Blower Wheel         | Bearing |
|-----------------|-------|------|-------|------|-----|-----|----------------|----------------------|---------|
| <b>HB-RB261</b> | 50    | 0.80 | 115   | 1450 | CW  | 130 | 16"×4.8"×4.25" | 65×240mm (2.6"×9.4") | Sleeve  |



## Enviro

Enviro 50-2981, Q2 Gas Fireplace

| Part #          | Watts | Amps | Volts | RPM  | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB981</b> | 50    | 0.82 | 115   | 2075 | CCW | 122 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

Includes blower, mounting plate, thermal switch, and variable speed control.



## Heat & Glo Blower Kit

Heat & Glo GFK-160A

Fasco 7002-1241, A133

| Blower Kit      | Blower Only      | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|-----------------|------------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB168</b> | <b>HB-RB168B</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB168 Includes blower with magnetic mounting, thermal switch assembly, variable speed control, wiring harness - cord with two prong plug.



# OEM Replacement

## Blowers, Motors & Fan Kits



**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**

### Heatilator

Heatilator FK21 (Old Kit), GFK21 (New Kit)

Novus 30, Security UZY3

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower         | Blower Wheel         | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|----------------|----------------------|---------|
| <b>HB-RB21K</b> | 35    | 0.57 | 115   | 1/1800  | CCW | 80  | 8.0"×4.3"×3.6" | 65×120mm (2.6"×4.7") | Sleeve  |

HB-RB21K Includes blower, thermal switch assembly, variable speed control - cord with three prong plug.

### Heatilator

Heatilator FK4 (Old Kit), GFK4 (New Kit)

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB74K</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Sleeve  |

HB-RB74K Includes blower, velcro mounting strips, thermal switch assembly, variable speed control - cord with three prong plug.

### Heritage

Wood Stove Blower

| Part #         | HP   | Volts | Amps | Type     | Spd/RPM | Rot | CFM | Body | Frame | Bearing |
|----------------|------|-------|------|----------|---------|-----|-----|------|-------|---------|
| <b>R7-RB34</b> | 1/25 | 120   | 0.60 | ECM/Open | 1/2800  | CW  | 73  | 6.6" | 3.3"  | Ball    |

HB-RB34 Includes intake screen guard, built-in variable speed control, 3-prong plug, round discharge - large square flange.

### Heritage

Heritage & Nordica Diamond Wall Furnace Blower

Newmac Wood Furnace 2040001

| Part #         | HP   | Volts | Amps | Type     | Spd/RPM | Rot | CFM | Body | Frame | Bearing |
|----------------|------|-------|------|----------|---------|-----|-----|------|-------|---------|
| <b>R7-RB33</b> | 1/25 | 120   | 0.60 | ECM/Open | 1/2800  | CW  | 73  | 6.6" | 3.3"  | Ball    |

R7-RB33 Features a built-in variable speed control & 72" cord with 3 prong plug.

### Heritage

Heritage Wood Insert

| Part #          | HP   | Volts | Amps | Type    | Spd/RPM | Rot | CFM  | Body | Frame | Bearing |
|-----------------|------|-------|------|---------|---------|-----|------|------|-------|---------|
| <b>HB-RB125</b> | 1/70 | 115   | 1.10 | SP/Open | 1/3200  | CCW | 125+ | 6.6" | 3.3"  | Sleeve  |

### Heritage

Heritage 8011

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB82</b> | 42    | 0.72 | 115   | 1/1600  | CW  | 110 | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1") | Ball    |

### Hunter

Hunter - 770 (Kit), HDS2000, HDS3000, HFI30, HDV31, MGDV31, SFDV20 (Models)

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB68</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

HB-RB68 Includes instructions, blower, mounting base, thermal switch assembly & variable speed control - cord with three prong plug.

### Hunter

Hunter F125H, HWF30, HDV30

| Part #         | Watts | Volts | Amps | RPM  | Rot | CFM | Blower          | Blower Wheel          | Bearing |
|----------------|-------|-------|------|------|-----|-----|-----------------|-----------------------|---------|
| <b>HB-RB79</b> | 62    | 115   | 0.72 | 1200 | CCW | 150 | 15.7"×4.3"×3.6" | 65×300mm (2.6"×11.8") | Ball    |

HB-RB79 blower only.





**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**

### Kingsman/Marquis

Z33FK - ZDV3320 ZDV6000 - HB-RB37

F35FK - FDV350, FV, FDV5000, 4000 - HB-RB35

Z36FK - ZDV3600, ZDV4200N - HB-RB36



HB-RB36  
illustrated



HB-RB35  
illustrated



HB-RB37  
illustrated

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB37</b> | 42    | 0.75 | 115   | 1/1400  | CCW | 110 | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1") | Ball    |
| <b>HB-RB35</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |
| <b>HB-RB36</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

Kits include, blower, mounting base, thermal switch assembly & variable speed control - cord with three prong plug.

### Lennox

FBK-250, BL65X, D-400, D-500, D-600, D-800, B-500, B-600, B-800,

MDT3328, MDR3328, Elite-2 Series, EDST-2,EDPF-2, EDCL-2, EDCR-2



| Blower Kit      | Blower Only     | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel        | Bearing |
|-----------------|-----------------|-------|------|-------|---------|-----|-----|-----------------|---------------------|---------|
| <b>HB-RB250</b> | <b>HB-RB100</b> | 50    | 0.86 | 115   | 1/1200  | CCW | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6×9.4") | Ball    |

HB-RB250 blower, speed control/thermal switch assembly, cord - 3 prong plug.

### Majestic, CFM

CFM-FK30, Instaflame 52425

New Energy Distributing - AD1 Single



| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower         | Blower Wheel    | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|----------------|-----------------|---------|
| <b>HB-RB130</b> | 53    | 0.56 | 115   | 1/2800  | CCW | 70  | 8"×4.56"×4.32" | 76×101mm (3×4") | Ball    |

HB-RB130 blower, magnetic mounting legs, cord - 2 prong plug.

### Majestic, Vermont Casting, CFM

CFM - FK24 (fan only), RHE32, Lennox 18L46, Majestic HE30,HE32, Travis (Gas)



| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel        | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|---------------------|---------|
| <b>HB-RB64</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6×9.4") | Ball    |

HB-RB64 blower only.

### Majestic, CFM

CFM - FA20(Model 1800), Majestic HE20 (Model)



| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel        | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|---------------------|---------|
| <b>HB-RB82</b> | 42    | 0.75 | 115   | 1/1600  | CW  | 110 | 10.5"×4.3"×3.6" | 65×180mm (2.6×7.1") | Ball    |

### Majestic, Vermont Casting, CFM

Majestic FK12



| Part #         | Watts | Amps | Volts | RPM  | Rot | CFM | Blower          | Blower Wheel        | Bearing |
|----------------|-------|------|-------|------|-----|-----|-----------------|---------------------|---------|
| <b>HB-RB12</b> | 50    | 0.86 | 115   | 1450 | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6×9.4") | Ball    |

Includes, cord, & 3 prong plug.

### Majestic, Vermont Casting, CFM

Majestic FK24 (Blower), 33DBVRRN, DBT33,36,39, DBR33,36,39 (Model)

Northern Flame FK24, A232, D232



| Blower Kit     | Blower & Base  | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel        | Bearing |
|----------------|----------------|-------|------|-------|---------|-----|-----|-----------------|---------------------|---------|
| <b>HB-RB65</b> | <b>HB-RB63</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6×9.4") | Ball    |

HB-RB65 Includes blower, mounting base w/ foam strips, thermal switch assembly & variable speed control - cord with three prong plug.

HB-RB63 Includes blower with mounting base plate.

# OEM Replacement

## Blowers, Motors & Fan Kits

**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**



### Monessen

Monessen BLOT SC

| Part #         | Watts | Amps | Volts | RPM  | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB95</b> | 50    | 0.86 | 115   | 1450 | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

Includes blower with Velcro mounting strips.



### Montigo, Selkirk

Electrohome 2811-581-001, EF100, T1-RF100 (Old Rotom 1spd), 2811-581-002, EF100-2

| Part #            | HP    | Amps | Volts | Type    | Spd/RPM | Rot | CFM | Body  | Frame | Bearing |
|-------------------|-------|------|-------|---------|---------|-----|-----|-------|-------|---------|
| <b>T1-RF100-2</b> | 1/167 | 0.50 | 115   | SP/Open | 2/3000  | CCW | 100 | 2.75" | Skel  | Sleeve  |

T1-RF100-2 blower includes mounting bracket & fan blade.



### Napoleon, Continental, Wolf Steel

Continental GZ550, BCDV36NTR (Gas)

Napoleon GZ550 (Blower), GD36NTR (Gas)

Fits most Napoleon direct vent gas/propane fireplaces.

HB-RB58  
 Complete  
 Blower Kit



| Blower Kit     | Blower Only    | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB58</b> | <b>HB-RB59</b> | 42    | 0.65 | 115   | 1/1463  | CCW | 108 | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1") | Ball    |

HB-RB58 Includes blower, mounting base, thermal switch assembly, variable speed control, mounting hardware, wiring harness - cord w/ 2-prong plug.

HB-RB59 includes blower, mounting base plate, variable speed control. Does not include mounting hardware, thermal switch or electrical assemblies.

### Napoleon, Continental, Wolf Steel

Continental GZ552 - Gas - Napoleon GZ552 - Gas

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB61</b> | 42    | 0.65 | 115   | 1/1463  | CCW | 108 | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1") | Ball    |

HB-RB61 blower only.



### Napoleon, Continental, Wolf Steel

EP62-1, EM3030LH186

| Part #          | CFM | Volts | Amps | Type | Spd/RPM | Rot | Blower             | Frame | Bearing |
|-----------------|-----|-------|------|------|---------|-----|--------------------|-------|---------|
| <b>HB-RB621</b> | 108 | 115   | 0.65 | SP   | 1/1463  | CCW | 12.25"×5.25"×3.75" | Skel  | Ball    |

Includes blower, mounting base & plate, variable speed control, cord - 3 prong plug.



### Napoleon, Continental, Wolf Steel

Gas Fired Stove - GDS50

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB166</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB166 blower only with mounting bracket with grommets.



### Nordica

Nordica B150 - Blower only - Traditional 1600-2100, Rustic 1600-2100

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB166</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |


Includes blower with mounting bracket with grommets.



### Nordica

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower         | Blower Wheel          | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|----------------|-----------------------|---------|
| <b>HB-RB513</b> | 162   | 1.35 | 115   | 1/2600  | CW  | 220 | 17.6"×4.25"×3" | 65×330mm (2.6"×13.0") | Sleeve  |

HB-RB513 furnished with cooling fan OSE.



**ALL NEW!!**

**24 Month Warranty  
on all "HB-" Products**

### Nordica

Nordica D-100 - Blower Only - Etna-Everest 200-2500, Olympia D-100

| Part #          | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection |
|-----------------|-------|-------|-----|------|---------|----------|----------|------------|
| <b>T8-RF235</b> | 22    | 115   | 106 | 3000 | Ball    | Metal    | 50db (A) | Terminal   |



### Nordica

Wood Stove Blower - UE383, Fasco B24220

| Part #        | CFM | Amps | Volts | Spd/RPM | Rot | Body  | Type      | Frame | Bearing |
|---------------|-----|------|-------|---------|-----|-------|-----------|-------|---------|
| <b>R7-RB3</b> | 100 | 0.35 | 115   | 1/3220  | CW  | 5.65" | PSC/ Open | 3.3"  | Ball    |

R7-RB3 Includes intake screen guard, 3-prong plug, round discharge - square flange.




### Osburn

Osburn FD006-1600 (Inserts), 1800, 2200, 2400 (Stoves)

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM     | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|---------|-----|---------|-----------------|------------------|---------|
| <b>HB-RB006</b> | 81    | 1.40 | 115   | 2/2800  | CCW | 125/150 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB006 Includes blower, housing, 3-way switch - cord with three prong plug.



### Osburn

Osburn KA108

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB108</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

HB-RB108 blower includes mounting base plate with grommets.



### Pacific Energy

Pacific Energy - WODC.BLOW / PACI 179B

| Part #          | CFM | Amps | Volts | Spd/RPM | Rot | Blower           | Blower Wheel     | Bearing |
|-----------------|-----|------|-------|---------|-----|------------------|------------------|---------|
| <b>HB-RB179</b> | 125 | 0.92 | 115   | 1/2400  | CW  | 17.5"×4.75"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB179 Includes blower, housing, variable speed control, thermal switch, Auto./Man. operation rocker switch, cord w/ 3 prong plug.



### Polaris

Polaris PG200

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel          | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|-----------------------|---------|
| <b>HB-RB944</b> | 17    | 0.77 | 115   | 1/2900  | CCW | 105 | 10.3"×3.6"×3.6" | 60×180mm (2.36"×7.1") | Ball    |

HB-RB944 blower only.



### Quadra Fire

Free Standing Woodstove Blower

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB83</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB83 - Blower housing, built in speed control - 8' cord with three prong plug



### Regency

Regency 910-33/P, -142/P, I1100, I2100, I3100 (Wood Insert)

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB166</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB166 blower, electrical leads, mounting bracket with grommets.



# OEM Replacement

## Blowers, Motors & Fan Kits

**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**



### Regency

Regency 846-515(Kit), 910-157/P (Blower Only), F1100, F2100, F2400M, F3100 Classic (Free Standing Wood)

| Part #          | Watts | Amps | Volts | Spd/RPM | Rot | CFM     | Blower          | Blower Wheel     | Bearing |
|-----------------|-------|------|-------|---------|-----|---------|-----------------|------------------|---------|
| <b>HB-RB167</b> | 53    | 1.30 | 115   | 2/2800  | CCW | 125/150 | 12.8"×4.5"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB167 Includes blower, electrical leads, mounting bracket with grommets.



### Regency

Regency 432-917, P33, P36, P36D, P48

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|--------------|---------|
| <b>HB-RB32</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm     | Ball    |

Includes blower, mounting base, speed controller, & thermal switch assemblies.




### Regency

910-331/P

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB64</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

Blower only.



### RSF

RSF - FO-FDHB5-N - Mdl. Onyx/Opel/Delta

| Part #         | CFM | Amps | Volts | RPM  | Blower           | Blower Wheel  | Bearing |
|----------------|-----|------|-------|------|------------------|---------------|---------|
| <b>HB-RB53</b> | 225 | 1.30 | 115   | 1450 | 25.75"×4.3"×3.6" | 65×240mm (x2) | Ball    |



### S.B.I

General Replacement Wood Stove Blower

| Part #         | HP   | Volts | Amps | Type     | Spd/RPM | Rot | CFM | Body | Frame | Bearing |
|----------------|------|-------|------|----------|---------|-----|-----|------|-------|---------|
| <b>R7-RB33</b> | 1/25 | 120   | 0.60 | ECM/Open | 1/2800  | CW  | 73  | 6.6" | 3.3"  | Ball    |

HB-RB33 Includes intake screen guard, built-in variable speed control, 3-prong plug, round discharge - square flange.



### Security

Security UZY4 - Fan kit (Wood Fireplace)

| Blw. Only      | Watts | Amps | Volts | RPM    | Rot | CFM | Blower          | Blw. Wheel | Bearing |
|----------------|-------|------|-------|--------|-----|-----|-----------------|------------|---------|
| <b>HB-RB67</b> | 35    | 0.75 | 115   | 1/1800 | CCW | 80  | 12.9"×4.3"×3.6" | 65×120mm   | Ball    |



### Security

Security UZY Old BIS1 & BIS2

| Part #          | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection |
|-----------------|-------|-------|-----|------|---------|----------|----------|------------|
| <b>T8-RF235</b> | 22    | 115   | 106 | 3000 | Ball    | Metal    | 50db (A) | Terminal   |



### Skytech

FK-180

| Part #          | CFM | Amps | Volts | Spd/RPM | Rot | Blower          | Blower Wheel     | Bearing |
|-----------------|-----|------|-------|---------|-----|-----------------|------------------|---------|
| <b>HB-RB861</b> | 180 | 1.48 | 115   | 1/2900  | CCW | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

Includes blower with magnetic mounting, thermal switch, variable speed control, cord with two prong plug.





**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**

## Valor


HB-RB555 - 555CFK Models 530, RF24, MF28

HB-RB755 - 755CFK Models 534, 535, 650, 738 (BV Only), 739

| Blower Kit      | CFM | Amps | Volts | RPM    | Rot | Body | Blower Wheel         | Bearing |
|-----------------|-----|------|-------|--------|-----|------|----------------------|---------|
| <b>HB-RB555</b> | 67  | 0.46 | 115   | 1/2200 | CW  | 7.80 | 45×180mm (1.8"×7.1") | Sleeve  |

Kits include blower, variable speed control, & thermal switch.

HB-RB555

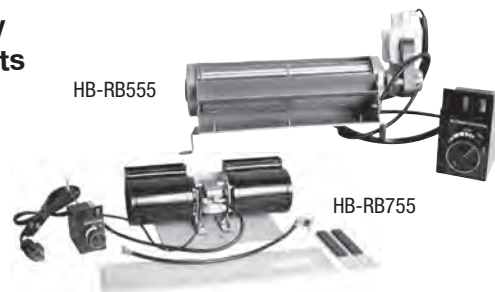

HB-RB755



## Vermont Casting, Dutchwest, Stardance, CFM

Dutchwest FK26 (#2465 Direct Vent Gas Stove & #2467 Natural Vent Gas Stoves)

Stardance FK26 (SNV30 Natural Vent Gas Stove)

| Part #         | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB27</b> | 53    | 0.92 | 115   | 1/2400  | CCW | 125 | 12.8"×4.6"×4.3" | 76×101mm (3"×4") | Ball    |

HB-RB27 Includes blower, mounting base & variable speed control assembly - cord with three prong plug.

### LEGAL NOTICE

Rotom is a registered trademark of Alltemp Products Company Limited (Alltemp)

It is important to note that Alltemp is not affiliated with any of the original equipment manufacturers or their brands which may be referred to herein. All brand names or trademarks used herein are the property of their respective owners and all original equipment manufacturers' names, numbers, symbols and descriptions are for cross reference purposes only. It is not implied that any part referred to herein is the product of any original equipment manufacturer, nor any of its associated brands. TRADEMARK DISCLAIMER - Product names, logos, brands, and other trademarks featured within are the property of their respective trademark holders. These trademark holders are not affiliated with Alltemp, our products or our website. No association between Alltemp and any trademark holder is expressed or implied. Names, numbers, symbols and descriptions are for cross reference purposes only.

## UNIVERSAL

### Double Centrifugal Blower Kit

- Fits many OEM gas & wood fireplaces!
- All components feature magnets for easy installation!
- Kit includes blower, pre-assembled thermal sensor and variable speed control assembly complete with cord and three prong plug!

**MAGNETIC MOUNTING!**  
 Blower, Thermal Sensor & Speed Control



| Blower Kit     | Blower Only     | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel     | Bearing |
|----------------|-----------------|-------|------|-------|---------|-----|-----|-----------------|------------------|---------|
| <b>HB-RB38</b> | <b>HB-RB38B</b> | 53    | 0.92 | 115   | 1/2400  | CW  | 125 | 12.8"×4.7"×4.3" | 76×101mm (3"×4") | Ball    |

## UNIVERSAL

### Tangential Blower Kit

- Fits many OEM gas & wood fireplaces!
- All components feature magnets for easy installation!
- Kit includes blower, pre-assembled thermal sensor and variable speed control assembly complete with cord and three prong plug!




| Part #         | Blower Only     | Watts | Amps | Volts | Spd/RPM | Rot | CFM | Blower          | Blower Wheel         | Bearing |
|----------------|-----------------|-------|------|-------|---------|-----|-----|-----------------|----------------------|---------|
| <b>HB-RB39</b> | <b>HB-RB39B</b> | 50    | 0.86 | 115   | 1/1450  | CW  | 130 | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4") | Ball    |

## Pellet Stove Gear Auger Motors


- 115 Volt • Sleeve Bearing • Single Speed • Shaded Pole • CCW Rotation

| Part #           | Amps | RPM | Body  | Shaft     | Features                                                          | Cross Reference                                  |
|------------------|------|-----|-------|-----------|-------------------------------------------------------------------|--------------------------------------------------|
| <b>HM-RGM450</b> | 0.25 | 1.0 | 3.2"  | 1.1"×3/8" | Spade terminals, Inc.'s 6 mtn. bolts<br>14 Watts Out              | Enviro EF001                                     |
| <b>HM-RGM451</b> | 0.19 | 1.0 | 3.0"  | 1"×3/8"   | Spade terminals, Inc.'s 6 mtn. bolts<br>1.5 Watts Out             | Lennox Hearth 6216, Fasco<br>V08038AA09          |
| <b>HM-RGM453</b> | 0.19 | 1.0 | 3.2"  | 1.1"×3/8" | Centered spade terminals, Inc.'s 6 mtn. bolts 11 Watts Out        |                                                  |
| <b>HM-RGM452</b> | 1.26 | 2.0 | 3.0"  | 1"×3/8"   | Bare wire leads, Inc.'s 6 mtn. bolts                              | Canadian Comfort Industries,<br>Fasco V07926AAD9 |
| <b>HM-RGM454</b> | 0.73 | 4.0 | 3.2"  | 1.1"×3/8" | Spade terminals, Inc.'s 6 mtn. bolts<br>35 Watts Out              |                                                  |
| <b>HM-RGM651</b> | 1.00 | 7.0 | 3.25" | 1"×1/2"   | Bare wire leads, Inc.'s 4 mtn. bolts & 2" dia. fan blade, 50 Watt | EMC6216, Fasco<br>V07959ABD9                     |

Replacements For:  
 Avalon, Austroflam, Breckwell, Enviro,  
 Earth Stove, Fasco, Lennox, Merkle-Korff  
 Ind., National Steel Crafters, Pellet Master,  
 Travis Ind., Whitfield (Quest), Traditions &  
 Profile Series Stoves.



HM-RGM451  
illustrated



HM-RGM651  
illustrated



# Pellet & Box Frame Motors



**ALL NEW!!**  
**24 Month Warranty**  
**on all "HB-" Products**

## Pellet Stove Blower Motors

### Whitfield - Quest

Whitfield - Quest 12026011, 13656011, Breckwell, Travis (Avalon & Lopi) Quadra-Fire, Fasco 7021-9129

| Part #           | HP   | Volts | Amps | Type     | Spd/RPM | Rot | Body  | Frame | Bearing |
|------------------|------|-------|------|----------|---------|-----|-------|-------|---------|
| <b>HB-RBM120</b> | 1/14 | 115   | 0.60 | SP/ Open | 1/3000  | CCW | 5.25" | 3.3"  | Sleeve  |

HB-RBM120 Includes 6 mounting nuts, gasket, fan blade & plug.

Mounting - 5.75" Diameter, 5.5" Mounting Centers



### Whitfield - Convection Blower

Whitfield 12126109, Fasco 7021-7786

| Part #           | HP   | Volts | Amps | Type     | Spd/RPM | Rot | Body | Frame | Bearing |
|------------------|------|-------|------|----------|---------|-----|------|-------|---------|
| <b>HB-RBM121</b> | 1/35 | 115   | 1.50 | SP/ Open | 1/3000  | CW  | 7.3" | 3.3"  | Sleeve  |

HB-RBM121 Square discharge, square flange & plug.



### Lennox - Earth Pellet Stove Blower


Lennox 15007 (Model), 8253710702 (Blower)

| Part #          | HP   | Volts | Amps | CFM | Type     | Spd/RPM | Rot | Body | Frame | Bearing |
|-----------------|------|-------|------|-----|----------|---------|-----|------|-------|---------|
| <b>HB-RB150</b> | 1/35 | 115   | 1.00 | 155 | SP/ Open | 1/1500  | CW  | 7.4" | 3.3"  | Sleeve  |

HB-RB150 Square discharge, square flange, 2 bare wire leads & 1 plug.




## Box Frame Blowers

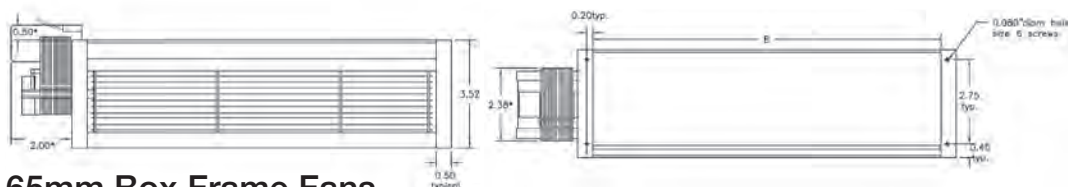

HB-RB944  
illustrated

### 65mm Box Frame Fans



| Part #          | Watts | Volts | Amps | Spd/RPM | Rot | CFM | Bearing | Body            | Wheel        | B      |
|-----------------|-------|-------|------|---------|-----|-----|---------|-----------------|--------------|--------|
| <b>HB-RB944</b> | 17    | 115   | 0.77 | 1/2900  | CCW | 105 | Ball    | 10.3"×3.6"×3.6" | 2.25"×7.13"  | 7.31"  |
| <b>HB-RB949</b> | 29    | 115   | 0.97 | 1/2900  | CCW | 180 | Ball    | 15.5"×3.6"×3.6" | 2.25"×12.25" | 12.46" |



## Box Frame Blowers - Double



HB-RB96  
illustrated

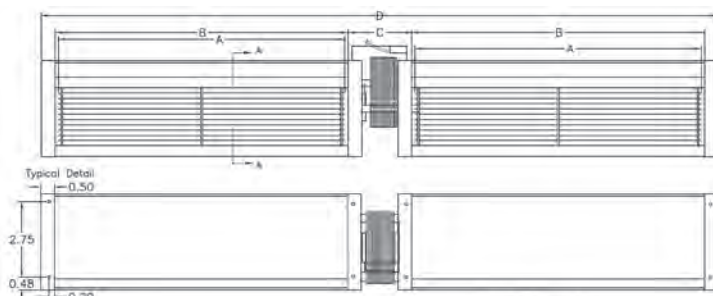

### Double Tangential Fan

Sil-Flo: Marcot Baseboard Heater, Lau T221-18 (HB-RB221)

| Part #         | Watts | Volts | Amps | Spd/RPM | Rot | CFM | Bearing | Body             | Frame | Wheel        | B      | C     | D      |
|----------------|-------|-------|------|---------|-----|-----|---------|------------------|-------|--------------|--------|-------|--------|
| <b>HB-RB96</b> | 58    | 115   | 1.50 | 1/2900  | CW  | 360 | Ball    | 28.6"× 3.6"×3.6" | Skel  | 2.25"×12.25" | 12.46" | 3.02" | 28.61" |

Rotation Opposite Shaft End / Double Shaft Lead End

**ALL NEW!!**  
24 Month Warranty  
on all "HB-" Products




CW Rotation

HB-RB66 HB-RB82 illustrated  
HB-RB64 HB-RB69  
HB-RB611 HB-RB41  
HB-RB45



CCW Rotation

HB-RB86 HB-RB61 illustrated  
HB-RB84 HB-RB79  
HB-RB822 HB-RB42  
HB-RB46

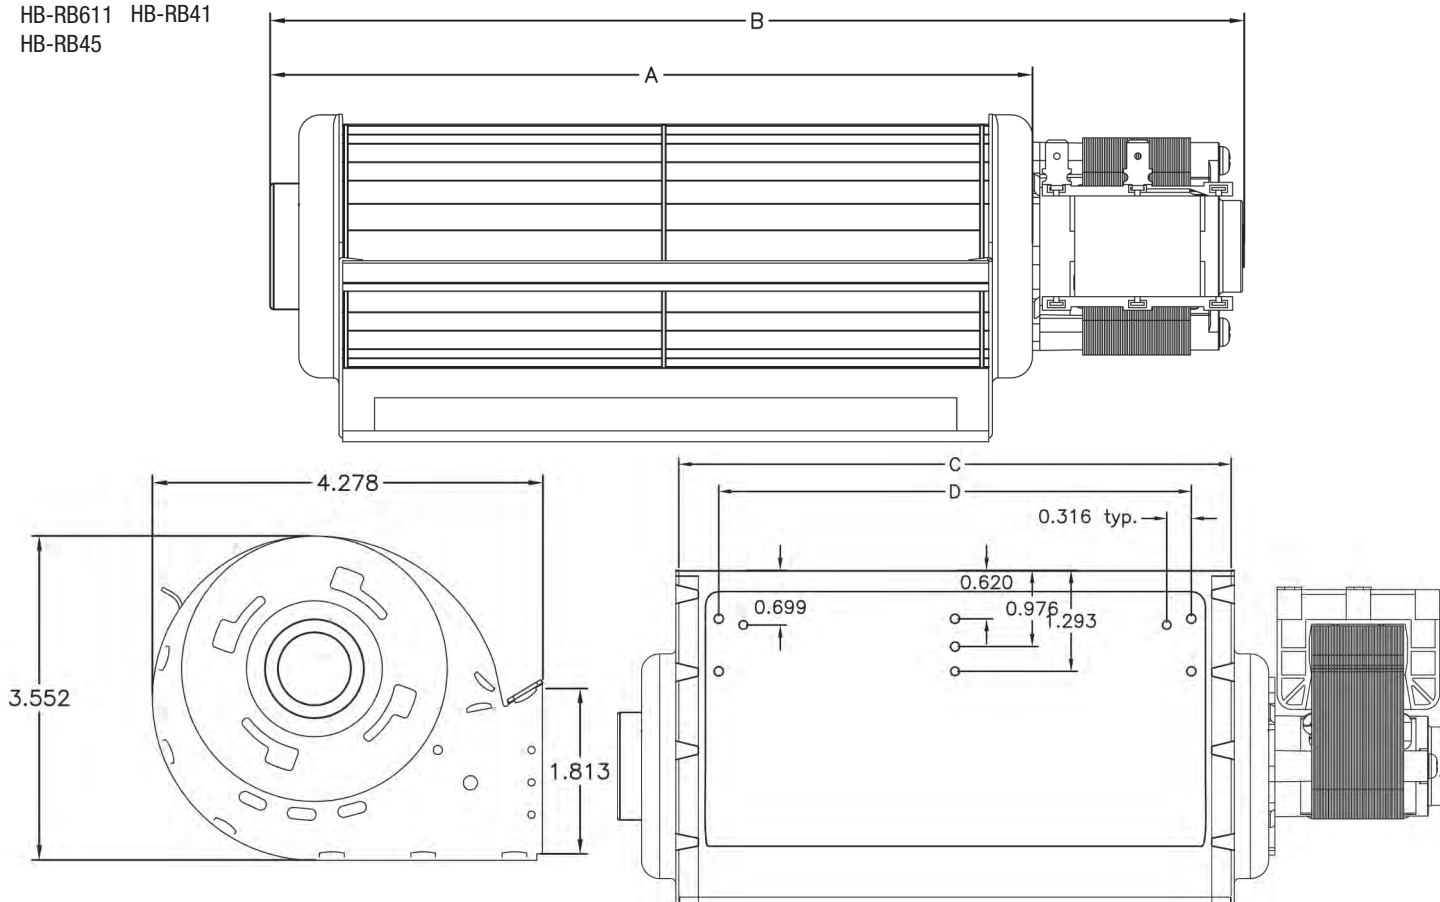

## 65mm Tangential Fans - Standard Duty

| Part #                        |          | Watts                        | Volts | Amps | Spd/RPM | CFM | Bearing | Body            | Wheel                 | Dimensions |        |        |        |
|-------------------------------|----------|------------------------------|-------|------|---------|-----|---------|-----------------|-----------------------|------------|--------|--------|--------|
| CW Rot                        | CCW Rot  |                              |       |      |         |     |         |                 |                       | A          | B      | C      | D      |
| HB-RB66                       | HB-RB86  | 35                           | 115   | 0.75 | 1/1800  | 80  | Ball    | 8.0"×4.3"×3.6"  | 65×120mm (2.6"×4.7")  | 6.00"      | 8.32"  | 4.72"  | 3.70"  |
| HB-RB82                       | HB-RB822 | 42                           | 115   | 0.75 | 1/1600  | 110 | Ball    | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1")  | 8.36"      | 10.69" | 7.09"  | 6.06"  |
| -                             | HB-RB61  | 42                           | 115   | 0.75 | 1/2400  | 160 | Ball    | 10.5"×4.3"×3.6" | 65×180mm (2.6"×7.1")  | 8.36"      | 10.69" | 7.09"  | 6.06"  |
| HB-RB64                       | HB-RB84  | 50                           | 115   | 0.86 | 1/1450  | 130 | Ball    | 12.9"×4.3"×3.6" | 65×240mm (2.6"×9.4")  | 10.72"     | 13.05" | 9.45"  | 8.43"  |
| HB-RB69                       | HB-RB79  | 62                           | 115   | 1.10 | 1/1200  | 150 | Ball    | 15.7"×4.3"×3.6" | 65×300mm (2.6"×11.8") | 13.09"     | 15.72" | 11.81" | 10.79" |
| Motor on right side of blower |          | Motor on left side of blower |       |      |         |     |         |                 |                       |            |        |        |        |

## 65mm Tangential Fans - Heavy Duty - Ball Bearing Motor & End Bearing

| Part #  |         | Watts | Volts | Amps | RPM  | CFM | Bearing | Body            | Wheel                | Dimensions |       |       |       |
|---------|---------|-------|-------|------|------|-----|---------|-----------------|----------------------|------------|-------|-------|-------|
| CW Rot  | CCW Rot |       |       |      |      |     |         |                 |                      | A          | B     | C     | D     |
| -       | HB-RB42 | 54    | 115   | 0.80 | 2100 | 160 | Ball    | 10"×4.3"×3.5"   | 65×180mm (2.6"×7.1") | 8.36"      | 10.0" | 7.08" | 6.09" |
| HB-RB45 | -       | 54    | 115   | 0.80 | 1500 | 140 | Ball    | 12.6"×4.3"×3.5" | 65×240mm (2.6"×9.4") | 10.12"     | 12.6" | 9.45" | 8.43" |

## 80mm x 80mm x 38mm (3.15" x 3.15" x 1.5")

- Mounting Centres 71.5mm (2.82")

| Part #           | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|------------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF200</b>  | 10    | 115   | 32  | 3100 | Sleeve  | Metal    | 34db (A) | Wire Leads | 420g   |
| <b>T8-RF201*</b> | 9     | 115   | 21  | 2000 | Sleeve  | Metal    | 26db (A) | Wire Leads | 420g   |
| <b>T8-RF202*</b> | 10    | 230   | 32  | 3100 | Ball    | Metal    | 34db (A) | Wire Leads | 420g   |

## 120mm x 120mm x 38mm (4.72" x 4.72" x 1.5")

- Mounting Centres 105mm (4.13")

| Part #          | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|-----------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF205</b> | 22    | 115   | 106 | 3000 | Sleeve  | Metal    | 50db (A) | Terminal   | 600g   |
| <b>T8-RF210</b> | 22    | 115   | 106 | 3000 | Ball    | Metal    | 50db (A) | Terminal   | 600g   |
| <b>T8-RF225</b> | 22    | 115   | 106 | 3000 | Ball    | Metal    | 50db (A) | Wire Leads | 600g   |
| <b>T8-RF215</b> | 21    | 230   | 106 | 3000 | Sleeve  | Metal    | 50db (A) | Terminal   | 600g   |
| <b>T8-RF220</b> | 21    | 230   | 106 | 3000 | Ball    | Metal    | 50db (A) | Terminal   | 600g   |

## 119mm x 119mm x 38mm (4.69" x 4.69" x 1.5")

- Mounting Centres 105mm (4.13")

| Part #           | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|------------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF230</b>  | 12    | 115   | 106 | 3100 | Sleeve  | Plastic  | 46db (A) | Terminal   | 530g   |
| <b>T8-RF235</b>  | 12    | 115   | 106 | 3100 | Ball    | Plastic  | 46db (A) | Terminal   | 530g   |
| <b>T8-RF237*</b> | 15    | 230   | 106 | 3100 | Ball    | Plastic  | 46db (A) | Terminal   | 530g   |

## 150mm x 150mm x 55mm (5.9" x 5.9" x 2.2")

- Mounting Centres 162mm (6.38")

| Part #          | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|-----------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF240</b> | 42    | 115   | 230 | 3400 | Ball    | Plastic  | 53db (A) | Wire Leads | 1kg    |
| <b>T8-RF245</b> | 40    | 230   | 230 | 3400 | Ball    | Plastic  | 53db (A) | Wire Leads | 1kg    |

## 150mm x 172mm x 38mm (5.9" x 6.7" x 1.5")

- Mounting Centres 162mm (6.38")

| Part #           | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|------------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF247*</b> | 28    | 115   | 212 | 3400 | Ball    | Plastic  | 58db (A) | Terminal   | 720g   |
| <b>T8-RF248*</b> | 26    | 230   | 212 | 3400 | Ball    | Plastic  | 58db (A) | Terminal   | 720g   |

## 180mm x 180mm x 90mm (7.1" x 7.1" x 3.5")

- Mounting Centres 152.7mm (6.01")

| Part #           | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|------------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF249*</b> | 72    | 115   | 460 | 3400 | Ball    | Plastic  | 59db (A) | Screw      | 2.2kg  |

## 254mm x 254mm x 89mm (10" x 10" x 3.5")

- Mounting Centres 247mm (9.72")

| Part #          | Watts | Volts | CFM | RPM  | Bearing | Impeller | Noise    | Connection | Weight |
|-----------------|-------|-------|-----|------|---------|----------|----------|------------|--------|
| <b>T8-RF250</b> | 35    | 115   | 547 | 1650 | Ball    | Plastic  | 55db (A) | Terminal   | 1.9kg  |
| <b>T8-RF255</b> | 33    | 230   | 547 | 1650 | Ball    | Plastic  | 55db (A) | Terminal   | 1.9kg  |

### Axial Fan Features:

- Die-cast Aluminum Housing
- Shaded Pole Motor
- Impedance Protection
- CSA & UL Approved.
- Operating Temp. Range -10°C to 70°C
- Metal or Plastic Impellers
- Sleeve or Ball Bearings



T8-RF210  
illustrated



T8-RF200  
illustrated



T8-RF230  
illustrated



T8-RF245  
illustrated



T8-RF250  
illustrated

### Metal Fan Guards

Mounting: Screw Holes

| Part #             | Size  |
|--------------------|-------|
| <b>T8-CFG-60M</b>  | 66mm  |
| <b>T8-CFG-80M</b>  | 80mm  |
| <b>T8-CFG-92M</b>  | 92mm  |
| <b>T8-CFG-120M</b> | 120mm |
| <b>T8-CFG-150M</b> | 150mm |
| <b>T8-CFG-254M</b> | 254mm |

### Plastic Fan Guards

Mounting: Plastic Tabs

| Part #             | Size  |
|--------------------|-------|
| <b>T8-CFG-120P</b> | 120mm |

Note: T8-CFG-80M, 120M, 150M  
are also available in black.\*



T8-CFC-T24  
illustrated

### Axial AC Power Cords

Bare Wire - 2 Pin molded connection to bare wire leads.

Plug - 2 Pin molded connection to 2 prong plug.

| Bare Wire         | Description         | Plug               |
|-------------------|---------------------|--------------------|
| <b>T8-CFC-T24</b> | 60.96cm (24") Cord  | <b>T8-CFC-T24P</b> |
| <b>T8-CFC-T72</b> | 182.88cm (72") Cord | <b>T8-CFC-T72P</b> |




| Part #          | CFM | Spd/RPM | Volts | Amps | Rot | Type | Encl | Bearing | Cross                                           |
|-----------------|-----|---------|-------|------|-----|------|------|---------|-------------------------------------------------|
| <b>R7-RB440</b> | 50  | 1/3080  | 115   | 0.25 | CW  | PSC  | Open | Ball    | Grainger 1TDN7, 4C440                           |
| <b>R7-RB663</b> | 60  | 1/3000  | 115   | 0.60 | CCW | SP   | T.E. | Sleeve  | AO Smith 9444                                   |
| <b>R7-RB661</b> | 60  | 1/3000  | 115   | 0.50 | CCW | SP   | Open | Sleeve  | AO SMITH 9461, FASCO 50747-D500                 |
| <b>R7-RB60</b>  | 60  | 1/3200  | 115   | 0.80 | CW  | SP   | Open | Sleeve  | AO SMITH 9470, FASCO 50747-D401                 |
| <b>R7-RB70</b>  | 70  | 1/3000  | 115   | 0.50 | CCW | SP   | Open | Sleeve  | AO Smith 989                                    |
| <b>R7-RB33</b>  | 73  | 1/2800  | 115   | 0.60 | CW  | ECM  | Open | Ball    | Newmac 204001 EB3 w/ Variable Spd Switch        |
| <b>R7-RB665</b> | 75  | 1/3020  | 115   | 0.45 | CCW | PSC  | Open | Ball    | AO SMITH 9462, FASCO 50748-D500, GRAINGER 4C443 |
| <b>R7-RB885</b> | 85  | 2/2800  | 115   | 0.65 | CW  | SP   | Open | Sleeve  | AO SMITH 414                                    |
| <b>R7-RB90</b>  | 90  | 1/3000  | 115   | 1.00 | CW  | SP   | Open | Sleeve  | AO SMITH 13                                     |
| <b>R7-RB991</b> | 90  | 1/3000  | 115   | 1.00 | CW  | SP   | Open | Sleeve  | AO SMITH 383                                    |
| <b>R7-RB4</b>   | 100 | 1/3220  | 115   | 0.34 | CW  | PSC  | T.E. | Ball    | Franklin 76012, 80042, Electrohome EB4          |
| <b>R7-RB3</b>   | 100 | 1/3220  | 115   | 0.34 | CW  | PSC  | Open | Ball    | Fasco B24220                                    |





| Part #          | CFM        | Spd/RPM | Volts   | Amps | Rot | Type | Encl | Bearing | Cross                                           |
|-----------------|------------|---------|---------|------|-----|------|------|---------|-------------------------------------------------|
| <b>R7-RB54</b>  | <b>100</b> | 1/3450  | 115     | 0.43 | CW  | PSC  | T.E. | Ball    | Easy Radiant                                    |
| <b>R7-RB120</b> | <b>120</b> | 1/3100  | 115     | 0.80 | CW  | SP   | Open | Sleeve  | AO Smith 9445                                   |
| <b>R7-RB141</b> | <b>140</b> | 1/3000  | 115     | 1.00 | CCW | SP   | Open | Sleeve  | AO Smith 9492, Fasco 50752-D500, GRAINGER 4C442 |
| <b>R7-RB142</b> | <b>140</b> | 1/3000  | 208/240 | 0.50 | CCW | SP   | Open | Sleeve  | AO Smith 9493, Fasco 50752-D230, Grainger 2C915 |
| <b>R7-RB446</b> | <b>146</b> | 1/3120  | 115     | 0.75 | CCW | PSC  | Open | Ball    | Grainger 4C446, 1TDP7, Fasco 7021-3469, A166    |
| <b>R7-RB155</b> | <b>148</b> | 1/2480  | 115     | 0.75 | CCW | PSC  | T.E. | Ball    | Grainger 1TDR6, 4C006, Fasco 7021-4933          |
| <b>R7-RB151</b> | <b>150</b> | 1/3000  | 115     | 1.10 | CCW | SP   | Open | Sleeve  | AO Smith 9483                                   |
| <b>R7-RB165</b> | <b>165</b> | 1/3550  | 115     | 0.65 | CCW | PSC  | Open | Ball    | -                                               |
| <b>R7-RB312</b> | <b>222</b> | 1/2750  | 115     | 0.60 | CCW | PSC  | Open | Ball    | Grainger 1TDU8, 4C826, Fasco A212, 70219025     |
| <b>R7-RB245</b> | <b>245</b> | 1/1550  | 115     | 1.50 | CCW | SP   | Open | Sleeve  | AMU45, Airdex                                   |
| <b>R7-RB265</b> | <b>265</b> | 1/1640  | 115     | 0.77 | CCW | PSC  | Open | Ball    | Franklin 80224, U.E.459, Fasco B45227           |

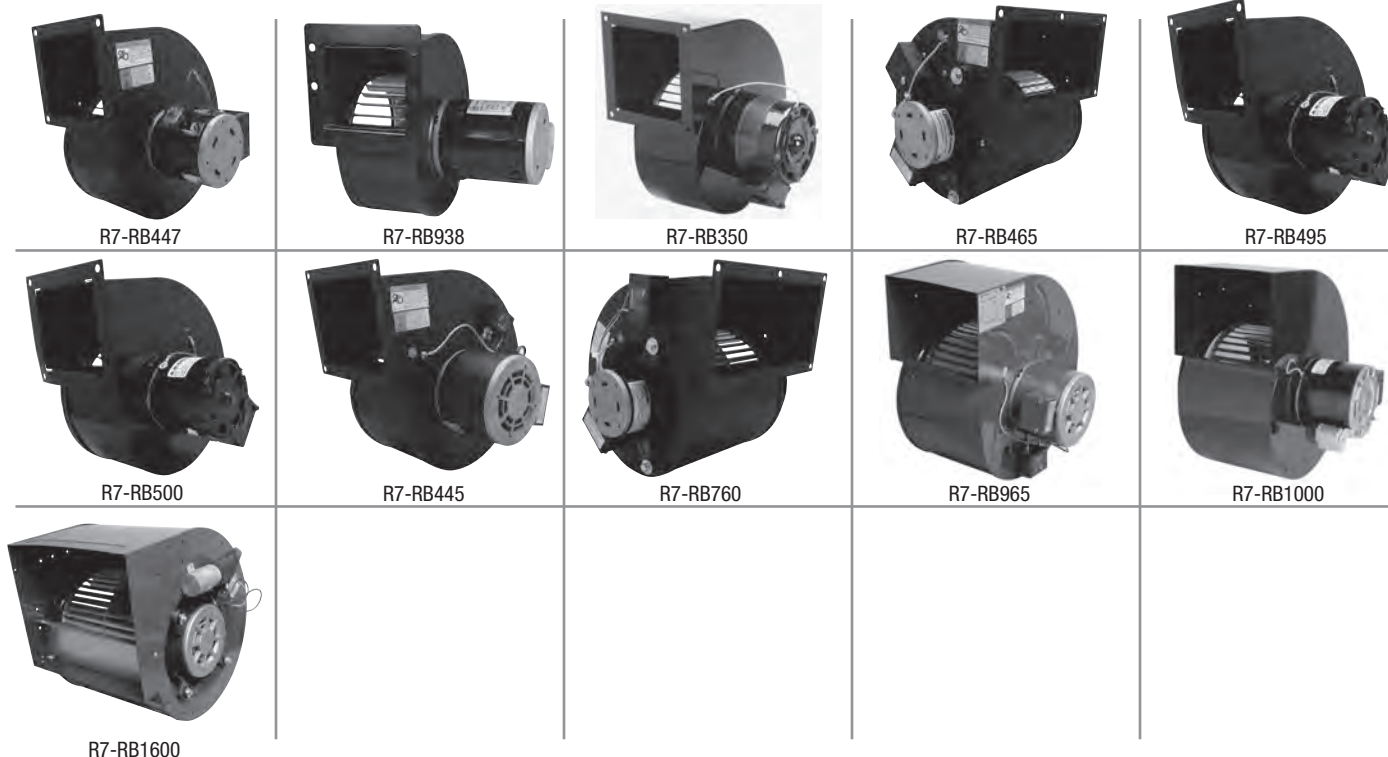

| Part #           | CFM  | Spd/RPM | Volts   | Amps | Rot | Type | Encl | Bearing | Cross                                                 |
|------------------|------|---------|---------|------|-----|------|------|---------|-------------------------------------------------------|
| <b>R7-RB447</b>  | 273  | 1/1640  | 115     | 0.77 | CCW | PSC  | Open | Ball    | Grainger 4C447, 1TDR3                                 |
| <b>R7-RB938</b>  | 287  | 1/3280  | 115     | 1.30 | CCW | PSC  | Open | Ball    | ProFab 814320, Aspen, Empyre, Fasco 70625938          |
| <b>R7-RB350</b>  | 350  | 2/1570  | 115     | 3.00 | CCW | SP   | Open | Sleeve  | AO Smith 9466, Grainger 4C444                         |
| <b>R7-RB465</b>  | 465  | 1/1560  | 115     | 1.30 | CW  | PSC  | Open | Ball    | Franklin 80546, U.E.460, Fasco B45267, Grainger 4C448 |
| <b>R7-RB495</b>  | 495  | 1/1570  | 115     | 3.80 | CCW | SP   | Open | Sleeve  | AO Smith 9465                                         |
| <b>R7-RB500</b>  | 500  | 2/1550  | 115     | 3.50 | CCW | SP   | Open | Sleeve  | AO Smith 9491, Fasco 50769-D500                       |
| <b>R7-RB445</b>  | 549  | 1/1430  | 115     | 2.20 | CCW | PSC  | Open | Ball    | Grainger 1TDT2, 4C445, 4YJ32                          |
| <b>R7-RB760</b>  | 797  | 2/1350  | 115     | 3.30 | CW  | PSC  | Open | Ball    | AO Smith 9459, Grainger 5C508                         |
| <b>R7-RB965</b>  | 965  | 1/1080  | 115     | 3.50 | CCW | PSC  | Open | Ball    | Grainger 1TDT5                                        |
| <b>R7-RB1000</b> | 1000 | 2/1100  | 115/230 | 4.00 | CCW | PSC  | Open | Sleeve  | AO Smith 9477, Fasco A1000                            |
| <b>R7-RB1600</b> | 1638 | 4/1085  | 115     | 6.90 | CCW | PSC  | Open | Ball    | Grainger 1XJX9                                        |

# In-Line Air Duct Booster Fans



## In-Line Air Duct Booster Fans

### Air Duct Booster

Designed to be installed at any angle in the branch duct of under-ventilated rooms to increase either hot or cool air flow supply. One year limited warranty.



### Control Options

- Manual Control**
  - 115V Source - continuous operation.
  - 115V Switch - manual ON/OFF ctrl.
- Automatic Control**
  - Wire to furnace fan.
  - Wire to fan switch.
  - Wire to a sail switch.
  - Wire to a pressure switch.
  - Wire to thermostat.



T9-DB6 illustrated

## Standard Air Duct Boosters

| Part #     |           | Description         | Max Boosted CFM | Free Air CFM | Watts | Amps | dBA | Blade         | Housing Length |
|------------|-----------|---------------------|-----------------|--------------|-------|------|-----|---------------|----------------|
| No Cord    | Cord      |                     |                 |              |       |      |     |               |                |
| T9-DB6-2CR | -         | 6" Rnd Double Crimp | 250             | 160          | 30    | 0.35 | 50  | Polycarbonate | 8"             |
| -          | T9-DB204C | 4" Round            | 80              | 40           | 30    | 0.30 | 52  | Polycarbonate | 6"             |
| -          | T9-DB205C | 5" Round            | 225             | 140          | 30    | 0.35 | 51  | Polycarbonate | 6"             |
| -          | T9-DB206C | 6" Round            | 250             | 160          | 30    | 0.35 | 50  | Polycarbonate | 6"             |
| -          | T9-DB208C | 8" Round            | 500             | 210          | 60    | 0.75 | 54  | Polycarbonate | 8"             |
| -          | T9-DB210C | 10" Round           | 650             | 300          | 120   | 1.50 | 55  | Aluminium     | 8"             |



T9-DB205-CRD illustrated

| Part #   | Diameter | CFM  | Watts | Order Mult |
|----------|----------|------|-------|------------|
| 625-AF6  | 6"       | 240  | 37    | 4          |
| 625-AF8  | 8"       | 420  | 37    | 4          |
| 625-AF10 | 10"      | 650  | 35    | 4          |
| 625-AF12 | 12"      | 975  | 65    | 2          |
| 625-AF14 | 14"      | 1350 | 65    | 1          |



## Two Speed Air Duct Boosters

| Part #    | Description       | Max Boosted CFM | Free Air CFM | Watts | Amps | dBA   | Blade         |
|-----------|-------------------|-----------------|--------------|-------|------|-------|---------------|
| T9-DB306E | 6" Round 2 Speed  | 200/300         | 160/180      | 30    | 0.35 | 50/52 | Polycarbonate |
| T9-DB10-2 | 10" Round 2 Speed | 650/900         | 300/460      | 135   | 1.70 | 56/59 | Aluminium     |



T9-DB10-2 illustrated

## 4-Pole Duct Boosters

Designed for larger ducts requiring commercial grade power and performance.

| Part #    | Description | Max Boosted CFM | Free Air CFM | Watts | Amps | dBA | Blade     |
|-----------|-------------|-----------------|--------------|-------|------|-----|-----------|
| T9-DB412E | 12" Round   | 1160            | 700          | 120   | 1.00 | 61  | Aluminium |
| T9-DB416P | 16" Round   | 1760            | 1100         | 120   | 1.00 | 54  | Aluminium |



4-Pole Duct Booster illustrated

## Motorized Duct Dampers

### Motorized Dampers

| Normally Open Part # | Normally Closed Part # | Duct Dia. | Weight |
|----------------------|------------------------|-----------|--------|
| T9-MD6-NO            | T9-MD6-NC              | 6"        | 3.5    |
| T9-MD8-NO            | T9-MD8-NC              | 8"        | 4.0    |
| T9-MD10-NO           | T9-MD10-NC             | 10"       | 5.0    |
| T9-MD12-NO           | T9-MD12-NC             | 12"       | 6.0    |

### Features

- Available in normally open or normally closed 5", 6", 7", 8", 10" and 12" duct diameters.
- 8" Housing lengths.
- 24VAC, 0.25 amps.
- 100% Shut off available.
- 3 Year limited warranty.

### Zone Control



T9-MD6 illustrated

### ThruWall Room To Room Fans

The T9-TW8-2 and T9-TW208 ThruWall™ fans easily install in an interior wall to move heated or cooled air from one adjoining room to another, providing year round comfort.

- Ultra quiet operation.
- White polymeric grills can be painted to match decor.
- Telescoping housing (Galvanized steel ) installs in frame walls from 3½" to 6½" thick.
- 10' Grounded cord(T9-TW8-2)
- Bare Wire Leads (T9-Tw208)



T9-TW8-2



T9-TW208

Direction Airflow!  
360° Rotating Grill

### ThruWall Fans

| Part #          | Features                                                                                                                                          | Description                                              | Volts | Amps | CFM                                   | dBa                 | Weight   |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------|------|---------------------------------------|---------------------|----------|
| <b>T9-TW8-2</b> | • 3 Position, 2 Speed switch                                                                                                                      | Grill 9.75"<br>Housing 7 5/8" dia.                       | 115   | 0.75 | 160 CFM low spd.<br>200 CFM high spd. | High: 55<br>Low: 49 | 5.0 lbs. |
| <b>T9-TW208</b> | • Built-in solid state speed control allows for fan speed & sound level control.<br>• 360° Rotating grill allows airflow direction to be changed. | Front: 12.5"×10"<br>Back: 9.75" dia.<br>Housing: 8" dia. | 115   | 0.75 | 40 CFM low spd.<br>90 CFM high spd.   | High: 55<br>Low: 49 | 5.0 lbs. |

60 Hz., Thermally protected, Class B insulation.

### Door Frame Fan

#### Entreeair® Door Frame Fan

The T9-DF100 is a safe, efficient and effective way to gently circulate warm or cool air from room to room.



| Part #          | Description        | Volts | Amps | CFM | Weight   |
|-----------------|--------------------|-------|------|-----|----------|
| <b>T9-DF100</b> | 7" Grill diameter. | 115   | 0.35 | 100 | 2.0 lbs. |

60 Hz., Thermally protected, Class B insulation.

- Quiet operation.
- Simple installation.
- In-line ON/OFF power switch.
- 10' Cord.
- Patented design.



T9-DF100  
illustrated

### Duct Thermostat

#### Plug-In Duct Stat

The T9-DS45110 duct stat simplifies installation of in-line duct booster fans by eliminating electrical connections at the furnace.

- Economical and reliable automatic on/off control for in-line duct booster fans.
- Mounts on duct or wall to control ambient room temperature.
- Adjustable temperature range: 45° F (7° C) to 110° F (43° C) and differential.
- 6' Grounded cord.
- Year round use, ON/ OFF, AUTO heating and AUTO cooling.
- Controls various devices, including alarms, heat lamps, lights, louvers, etc.



T9-DS45110  
illustrated

### Plug-In Switch - Thermostatically Controlled

| Part #            | Description                               | Volts | Dimensions            | Weight    |
|-------------------|-------------------------------------------|-------|-----------------------|-----------|
| <b>T9-DS45110</b> | 5 Amp maximum load (replaceable 5A fuse). | 115   | 5.50" × 3.25" × 2.25" | 1.25 lbs. |

60 Hz.



### Fireplace Thermostat

- Elegant design
- Easy to operate
- Zoning system compatible
- Adjustable differential
- Large LCD temperature display
- Compatible with standard 24V AC heating/cooling systems
- Precise temperature sensing
- Easy access terminal block
- Freeze protection
- Integral five minute anti-short cycle protection
- Mercury free environmental safe
- Manual changeover
- Battery included
- Ideal for electric, gas, oil and hydronic systems.

Millivolt Compatible!  
Battery Operated!  
Freeze Protected!

### Digital Fireplace Thermostat

| Part #            | Description                                                   |
|-------------------|---------------------------------------------------------------|
| <b>78-SC1600L</b> | • Non Programmable.<br>• Single Stage Heat Only.<br>• No Fan. |



Who Will Your Customer Call The Next Time  
Their Fireplace Or Stove Requires Service?



# Speed Controls & Switches



## Speed Controls

### Motor Speed Controls

Complete with control, knob, face plate & hardware.

| Part #            | Volts | Amps | Description   |
|-------------------|-------|------|---------------|
| <b>92-A8301</b>   | 120   | 2.5  | Std. Ctrl Kit |
| <b>92-A8301-1</b> | 120   | 2.5  | No Face Plate |
| <b>92-A8303</b>   | 120   | 5    | Std. Ctrl Kit |
| <b>92-A8305</b>   | 120   | 10   | W/ Heat Sink  |
| <b>92-A8306</b>   | 120   | 15   | W/ Heat Sink  |

| Part #            | Amps | Description                                                  |
|-------------------|------|--------------------------------------------------------------|
| <b>HB-RB38-1</b>  | 3.0  | Magnetically Mounted Speed Control & Thermal Switch Assembly |
| <b>HB-RB168-1</b> | 3.0  | Variable Speed Control                                       |



## Rocker Switches - Snap-in Mount

| Type | Part #          | Colour | Function          | Amps | 1/4" Spades | Fig. |
|------|-----------------|--------|-------------------|------|-------------|------|
| Mini | <b>29-159-1</b> | Black  | 2 - On / Off      | 15   | 3           | 1    |
|      | <b>29-159-3</b> | Black  | 2 - On / Off      | 10   | 2           | 2    |
|      | <b>29-159-5</b> | Black  | 3 - On / Off / On | 10   | 3           | 2    |



Fig. 3



Fig. 1



Fig. 2

## Limit Switches


### Limit Switch Nomenclature

|     |                      |
|-----|----------------------|
| L   | Limit - Open on rise |
| S   | Switch               |
| 2   | Number of terminals  |
| 110 | Opening temperature  |

### Limit Switches

- 25 Amps, 240 Volt
- 2 Terminal

| Part #            | Part #             |
|-------------------|--------------------|
| <b>19-LS2-120</b> | <b>19-LS2-190</b>  |
| <b>19-LS2-135</b> | <b>19-LS2-200</b>  |
| -                 | <b>19-LS2-200F</b> |
| <b>19-LS2-145</b> | <b>19-LS2-240</b>  |
| <b>19-LS2-150</b> | <b>19-LS2-250</b>  |
| <b>19-LS2-160</b> | <b>19-LS2-275</b>  |
| -                 | <b>19-LS2-290</b>  |
| <b>19-LS2-180</b> | <b>19-LS2-320</b>  |

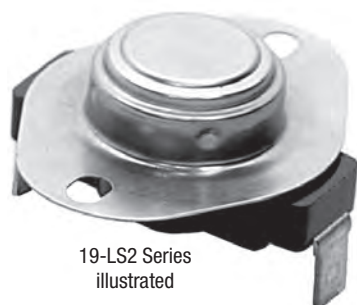

## Fan Switches

### Fan Switch Nomenclature

|     |                     |
|-----|---------------------|
| F   | Fan - Close on rise |
| S   | Switch              |
| 2   | Number of terminals |
| 110 | Closing temperature |

### Two Terminal Fan Switches

- 3/4" standard discs.

| Part #             | Closing Temp. |
|--------------------|---------------|
| <b>19-SF2-115*</b> | 43°C (110°F)  |
| <b>19-FS2-110</b>  | 43°C (110°F)  |
| <b>19-FS2-120</b>  | 49°C (120°F)  |
| <b>19-FS2-130</b>  | 54°C (130°F)  |
| <b>19-FS2-160</b>  | 71°C (160°F)  |

\* 1/2" disc




## Fireplace Kit Accessories

### Thermal Switch Assemblies

| Part #            | Description                                                          |
|-------------------|----------------------------------------------------------------------|
| <b>HB-RB168-2</b> | Thermal Switch Assembly                                              |
| <b>HB-RB67-3</b>  | Magnetic Thermal Switch Assembly                                     |
| <b>HB-RB67-1</b>  | Magnetic Thermal Switch & Wiring Harness Assembly For 1 or 2 Blowers |

Note : All switches are 43°C (110°F)

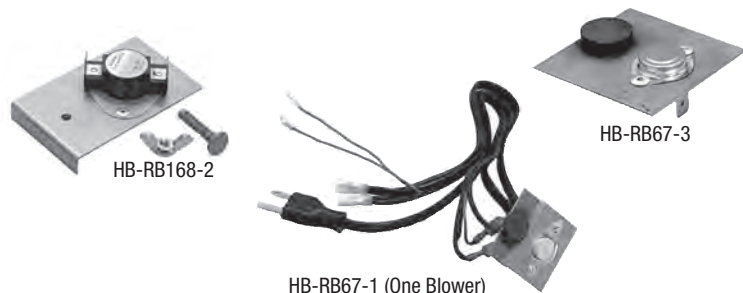

### Forged Gas Ball Valves

- Brass or plated outdoor.
- Yellow lever handle.
- 600 WOG full port.



Brass (Indoor) or  
Plated (Outdoor)  
Applications

| Brass Indoor | Plated Outdoor | Description               | Case Qty |
|--------------|----------------|---------------------------|----------|
| 06-FGV38     | 06-FGV38P      | 3/8" FNPT × 3/8" FNPT     | 5        |
| 06-FGV12     | 06-FGV12P      | 1/2" FNPT × 1/2" FNPT     | 5        |
| 06-FGV34     | 06-FGV34P      | 3/4" FNPT × 3/4" FNPT     | 5        |
| 06-FGV1      | 06-FGV1P       | 1" FNPT × 1" FNPT         | 2        |
| -            | 06-FGV114P     | 1 1/4" FNPT × 1 1/4" FNPT | 2        |
| 06-FGV112    | 06-FGV112P     | 1 1/2" FNPT × 1 1/2" FNPT | 2        |
| -            | 06-FGV2P       | 2" FNPT × 2" FNPT         | 2        |

### Appliance Forged Gas Ball Valves

- Brass ball valves.
- Red wing handle.
- 600 WOG.



| Part #   | Description                      | Case Qty |
|----------|----------------------------------|----------|
| 06-GWH12 | 1/2" FNPT × 1/2" FNPT, 3/8" port | 10       |
| 06-GWH34 | 3/4" FNPT × 3/4" FNPT, 1/2" port | 10       |

### Boiler Drain Valves

#### Forged Boiler Gate Valve

- Brass drain valve.
- Green handle.



| Part #   | Description      | Case Qty |
|----------|------------------|----------|
| 06-BGV12 | 1/2" MNPT × Hose | 5        |
| 06-BGV34 | 3/4" MNPT × Hose | 5        |

### Silicone

Features:

- NSF Approved • 100% Silicone • 100% RTV

#### 302 (GP) General Purpose

- Available in multiple colours.
- The ideal multiple purpose silicone sealant for all weather applications.



#### 302 (HT) High Temperature

- Withstands temperatures of 260°C(500°F) constant and 316°C(600°F) intermittent.
- An ideal silicone for extreme temperature applications.



### Fireplace Forged Gas Ball Valves

- Brass ball valves.
- Red wing handle.
- 600 WOG.



| Part #    | Description                 | Case Qty |
|-----------|-----------------------------|----------|
| 06-FP1238 | 1/2" FNPT × 3/8" Male flare | 10       |
| 06-FP1212 | 1/2" FNPT × 1/2" Male flare | 10       |
| 06-FP3458 | 3/4" FNPT × 5/8" Male flare | 10       |

### Appliance Forged Gas Ball Valves

- Brass ball valves.
- Yellow flat head.
- 600 WOG.



| Part #    | Description                      | Case Qty |
|-----------|----------------------------------|----------|
| 06-FHGV34 | 3/4" FNPT × 3/4" FNPT, 1/2" port | 12       |

### Water Valves

#### Brass Welded Ball Valves

- Full Port.
- Female sweat connection.
- 600 WOG.
- Green lever handle.



| Part #   | Description             | Case Qty |
|----------|-------------------------|----------|
| 06-SWV12 | 1/2" Sweat × 1/2" Sweat | 5        |

### Spray Nine Seasonal Cleaners

BBQ Grill, Wood Stove and Gas Fireplace, we've got a premium cleaner for all cleaning needs. Spray Nine® Seasonal Cleaners are available thru Rotom, your single source for Fireview and Gas Fireplace cleaners.



| Part #    | Description                                                              |
|-----------|--------------------------------------------------------------------------|
| 15-C15650 | BBQ Grill Cleaner 650ml Bottle 6/Case                                    |
| 15-C26822 | Heavy-Duty Cleaner/Disinfectant 650ml Spray Bottle 6/Case                |
| 15-26832  | Multi-Purpose Cleaner/Degreaser/Disinfectant 4L Jugs 4/Case              |
| 15-26804  | Multi-Purpose Cleaner/Degreaser/Disinfectant 946ml Spray Bottles 12/Case |
| 15-C23319 | Glass & Stainless Steel Cleaner 600g Aerosol 12/Case                     |

Rotation Opposite Shaft End / Double Shaft Lead End

## Epoxy Putty Sticks



| Part #       | Description   | Size | Case Qty |
|--------------|---------------|------|----------|
| 12-451070-24 | Fast Steel    | 3.5" | 24       |
| 12-457070-24 | Quik Aluminum | 3.5" | 24       |
| 12-462570-24 | Quik Copper   | 3.5" | 24       |
| 12-470570-24 | Aquamend      | 3.5" | 24       |
| 12-475570-24 | Quik Plastic  | 3.5" | 24       |

## Caulking Guns

### 113 Series

- Economy grade.
- 310ml/10.15oz.
- Clean out tool on barrel.



15-CG000113

### 138 Series

- Professional grade.
- 310ml/10.15oz.
- Clean out tool on handle.



15-CG000138

## Shop Rags

### Medium Duty Service & Shop Rags

Coloured rags, similar to balbriggan or Polo cotton T-shirt material.

| Part #    | Description               | Weight          |
|-----------|---------------------------|-----------------|
| 13-536-10 | 10 lbs. service size pack | 4.5 kg (10 lbs) |

Additional materials and sizes available upon request

### Medium Duty

Low cost, no lint, light weight general purpose shop rags. A good general purpose, medium quality wiper at a relatively low cost.



## Chimney & Flue Cleaning Brushes


### Chimney & Flue Brushes

Chimney/flue cleaning brushes are available in wire for cleaning ceramic flues and chimneys, and poly for cleaning metal flues and chimneys. Choose from a complete range of standard sizes and shapes with 1/4" NPT connectors. Heavy-duty brushes are offered with 3/8" NPT connectors.

### Wire Chimney & Flue Brushes

- 1/4" NPT

| Part #   | Description          |
|----------|----------------------|
| 61-30600 | 6" Round             |
| 61-30700 | 7" Round             |
| 61-30800 | 8" Round             |
| 61-30900 | 9" Round             |
| 61-31000 | 10" Round            |
| 61-31200 | 12" Round            |
| 61-30606 | 6" x 6" Square       |
| 61-30707 | 7" x 7" Square       |
| 61-30808 | 8" x 8" Square       |
| 61-31010 | 10" x 10" Square     |
| 61-31006 | 10" x 6" Rectangular |
| 61-31008 | 10" x 8" Rectangular |
| 61-31107 | 11" x 7" Rectangular |
| 61-31208 | 12" x 8" Rectangular |



61-30600 illustrated



Standard Packaging



Heavy-Duty Wire Chimney Brushes

### Poly Chimney & Flue Brushes

- 1/4" NPT

| Part #   | Description    |
|----------|----------------|
| 61-33110 | 5" Round       |
| 61-33140 | 6" Round       |
| 61-33170 | 7" Round       |
| 61-33190 | 8" Round       |
| 61-33210 | 12" Round      |
| 61-33150 | 6" x 6" Square |
| 61-33200 | 8" x 8" Square |



61-31107 illustrated

Rotation Opposite Shaft End / Double Shaft Lead End

## MILL-ROSE

### Wire Chimney & Flue Brushes

Heavy-duty wire chimney brushes are designed for professional trade applications.

- Brushes 3/8" NPT.

| Part #   | Description        |
|----------|--------------------|
| 61-30801 | 8" Round           |
| 61-31001 | 10" Round          |
| 61-31401 | 14" Round          |
| 61-30708 | 7" x 7" Square     |
| 61-30809 | 8" x 8" Square     |
| 61-31011 | 10" x 10" Square   |
| 61-31108 | 11" x 7" Rectangle |
| 61-31205 | 12" x 8" Rectangle |
| 61-31213 | 12" x 12" Square   |

### Chimney Liner Brushes


- 3/8" NPT, Round, 0.40" Crimped Poly Fill.

| Part #   | Description  | Part #   | Description   |
|----------|--------------|----------|---------------|
| 61-83491 | 5" Dia. poly | 61-83561 | 9" Dia. poly  |
| 61-83521 | 7" Dia. poly | 61-83581 | 10" Dia. poly |



61-83521 illustrated

Chimney & Flue Cleaning Brushes Available In Square, Rectangular & Round.







### Extension Rods

#### Flue Boiler & Chimney

Flexible, self-connecting fiberglass or twisted wire extension rods with self-connecting 1/4" NPT nipples are available in three convenient lengths; 3', 4' & 6'.

### Flue Boiler & Chimney Extension Rods

- Fiberglass/ Steel & Twisted Wire.
- 1/4" NPT 0.34 diameter (fiberglass).

| Part #                                  | Description                   | Length |
|-----------------------------------------|-------------------------------|--------|
| 61-30002                                | Fiberglass                    | 3'     |
| 61-30021                                | Fiberglass                    | 4'     |
| 61-30022                                | Fiberglass W/ T-Handle (6 pk) | 4'     |
| 61-30061                                | Fiberglass                    | 6'     |
| 61-30071                                | Fiberglass (24pk)             | 6'     |
| 61-30003                                | Twisted Wire W/ loop handle   | 3'     |
| 61-30007                                | Twisted Wire                  | 3'     |
| 61-30009                                | Twisted Wire (24/pk)          | 3'     |
| 61-30031                                | Twisted Wire                  | 4'     |
| 61-30033                                | Twisted Wire (24/pk)          | 4'     |
| 61-30073                                | Twisted Wire (24/pk)          | 6'     |
| • 3/8" NPT self-connect 0.44" diameter. |                               |        |
| 61-30035                                | Fiberglass - Heavy Duty       | 4'     |
| 61-30065                                | Fiberglass - Heavy Duty       | 6'     |

Fiberglass Pellet  
Stove Extension Rod

Fiberglass Pellet  
Stove Extension Rod  
With T-Handle

### Pellet Stove Flue Extension Rods


- Fiberglass.
- 5/16"-18 male/female thread.

| Part #   | Description                                                | Length |
|----------|------------------------------------------------------------|--------|
| 61-65010 | Fiberglass                                                 | 2'     |
| 61-65015 | Fiberglass                                                 | 3'     |
| 61-65000 | Fiberglass W/ T-handle                                     | 3'     |
| 61-65016 | Fiberglass                                                 | 4'     |
| 61-65019 | Fiberglass - Display Package W/<br>T-handle (6/pk)         | 4'     |
| 61-65017 | Fiberglass                                                 | 6'     |
| 61-65001 | T-handle only: 1/2" x 3", 5/16"<br>-18 male/ female thread | -      |
| 61-65009 | Rod/ brush adapter 5/16-18 to<br>1/4-20 thread             | -      |

### Pellet Stove Flexible Connector

- Designed for pellet stove brush extension rods.
- Attaches to extension rods for 90° bends.

| Part #   | Description                             |
|----------|-----------------------------------------|
| 61-70721 | 10 3/4" OAL, 5/16"-18 spring connector. |
| 61-70722 | 13" OAL, std. rod, 1/4" NPT.            |



#### T-Extension Rod Handle

- Used with 1/4" NPT fiberglass or steel extension rods.

| Part #   | Description                     |
|----------|---------------------------------|
| 61-70766 | Steel Construction: 4" x 2 1/2" |

## Pellet Stove Flue Brushes

### Pellet Stove Brushes

Fibre brushes work best for soot removal in pellet stove flues, while stainless steel brushes are more suitable for creosote removal. Brushes and flexible extension rods are designed to negotiate 90° joints in most vent and flues, many cases without disassembly.

### Pellet Stove Brushes

- 1/4" - 20 male/ female thread.
- POP packaged.

| Part #   | Description                    |
|----------|--------------------------------|
| 61-84352 | 3" dia. stainless steel wire   |
| 61-84372 | 4" dia. stainless steel wire   |
| 61-84380 | 6" dia. fibre, 1/4-20 coupling |
| 61-84385 | 8" dia. fibre, 1/4-20 coupling |



61-84334  
All threaded components  
Replacement brush heads  
available

### Pellet Stove Vent Cleaning Brushes

- 5/16"-18 female thread.

| Part #   | Description   |
|----------|---------------|
| 61-84331 | 2" Dia. fibre |
| 61-84351 | 3" Dia. fibre |
| 61-84371 | 4" Dia. fibre |

## Maintenance Brushes

### Scratch Brushes

- Oil tempered, carbon steel fill wire.
- Extra deep wire staple.
- Hard wooden handles.

| Part #   | Block Size   | Handle Type | Rows   | Brush Trim |
|----------|--------------|-------------|--------|------------|
| 61-70550 | 14" x 1 1/8" | Bent        | 4 x 18 | 1 3/16"    |
| 61-70606 | 14" x 1"     | Bent        | 3 x 19 | 1 3/16"    |
| 61-70570 | 10" x 1 1/8" | Shoe        | 4 x 16 | 1 3/16"    |











# Blower Flange Dimensions



| Part #    | Type A                 |       |       |       | Type B |       |       | Type C |      |      |      |       |       |       | Type D |       |       |       | Type E |   |   |  |
|-----------|------------------------|-------|-------|-------|--------|-------|-------|--------|------|------|------|-------|-------|-------|--------|-------|-------|-------|--------|---|---|--|
|           | A                      | B     | C     | D     | E      | F     | G     | H      | I    | J    | K    | L     | M     | N     | O      | P     | Q     | R     | S      | T | U |  |
| R7-RB3    | 4.60"                  | 3.90" | 3.50" | 2.80" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB33   | 3.00"                  | 2.30" | 3.00" | 2.30" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB34   | 4.5"                   | 3.45" | 4.0"  | 2.85" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB60   | -                      | -     | -     | -     | 3.3"   | 2.77" | 2.95" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB70   | 4.0"                   | 3.38" | 3.5"  | 2.88" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB120  | -                      | -     | -     | -     | 4.0"   | 2.81" | 2.33" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB141  | -                      | -     | -     | -     | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | 5.13"  | 4.11" | 4.00" | 1.50" | -      | - | - |  |
| R7-RB142  | -                      | -     | -     | -     | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | 5.13"  | 4.11" | 4.00" | 1.50" | -      | - | - |  |
| HB-RB150  | See diagram on page 22 |       |       |       |        |       |       |        |      |      |      |       |       |       |        |       |       |       |        |   |   |  |
| R7-RB155  | 4.0"                   | 3.8"  | 4.0"  | 3.3"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB165  | 3.5"                   | 2.9"  | 3.9"  | 3.37" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB265  | 5.5"                   | 4.85" | 5.0"  | 4.4"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB350  | 5.3"                   | 4.7"  | 5.6"  | 5.0"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB440  | -                      | -     | -     | -     | 4.04"  | 2.81" | 2.38" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB445  | 6.6"                   | 6.0"  | 5.7"  | 5.0"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB446  | 4.61"                  | 3.96" | 3.52" | 2.87" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB447  | 6.6"                   | 6.0"  | 5.7"  | 5.0"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB465  | -                      | -     | -     | -     | -      | -     | -     | 9.43"  | 8.8" | 4.4" | 4.4" | 5.0"  | 4.4"  | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB495  | 6.6"                   | 6.0"  | 5.6"  | 5.0"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB500  | 6.6"                   | 6.0"  | 5.6"  | 5.0"  | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB661  | -                      | -     | -     | -     | 3.3"   | 2.77" | 2.36" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB662  | -                      | -     | -     | -     | 3.3"   | 2.77" | 2.36" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB665  | -                      | -     | -     | -     | 3.3"   | 4.00" | 2.33" | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB760  | -                      | -     | -     | -     | -      | -     | -     | 9.33"  | 8.8" | 4.4" | 4.4" | 5.63" | 5.06" | -     | -      | -     | -     | -     | -      | - | - |  |
| R7-RB938  | -                      | -     | -     | -     | -      | -     | -     | -      | -    | -    | -    | -     | -     | 4.75" | 4.12"  | 4.75" | 1.50" | -     | -      | - | - |  |
| R7-RB991  | 3.00"                  | 2.00" | 3.00" | 2.00" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |
| HB-RBM121 | 4.40"                  | 3.75" | 4.01" | 3.40" | -      | -     | -     | -      | -    | -    | -    | -     | -     | -     | -      | -     | -     | -     | -      | - | - |  |

Diagrams on next page

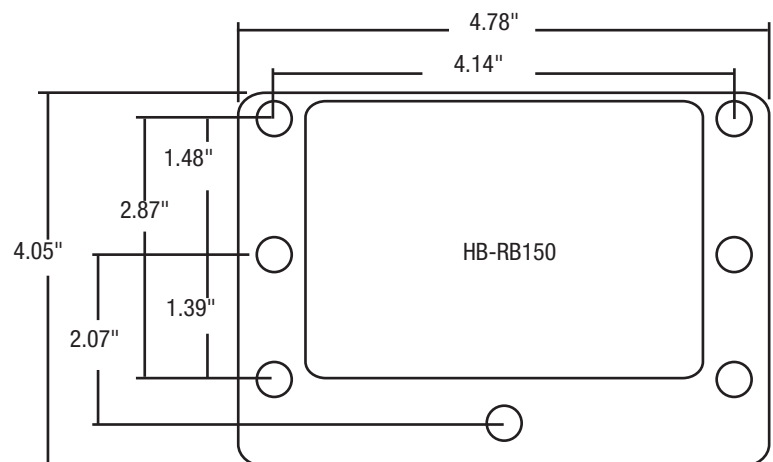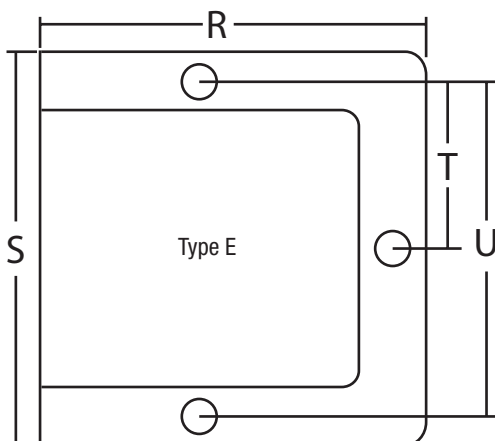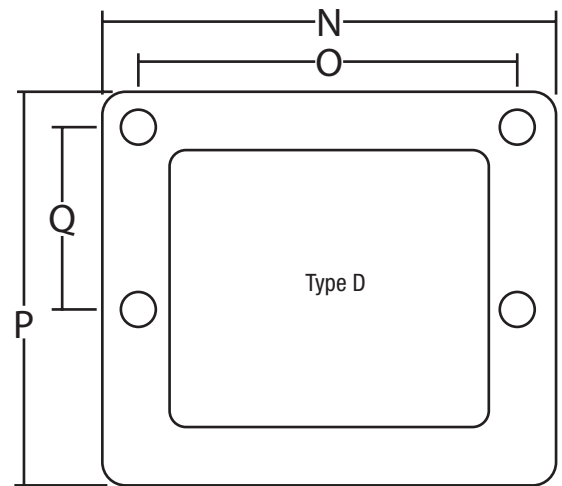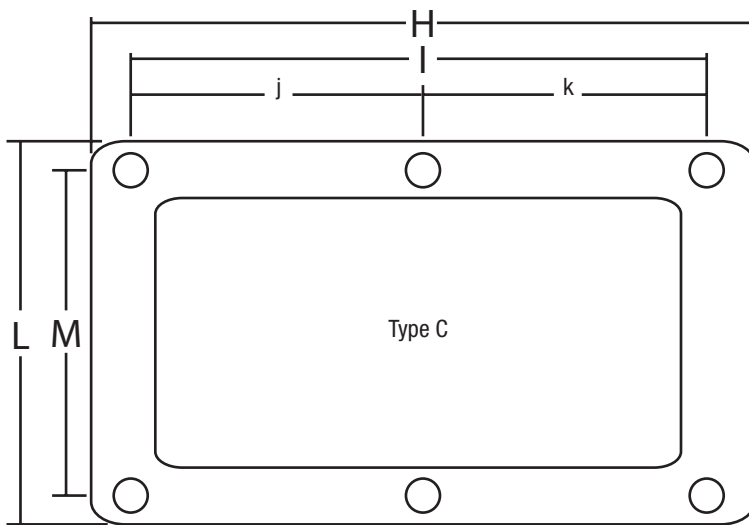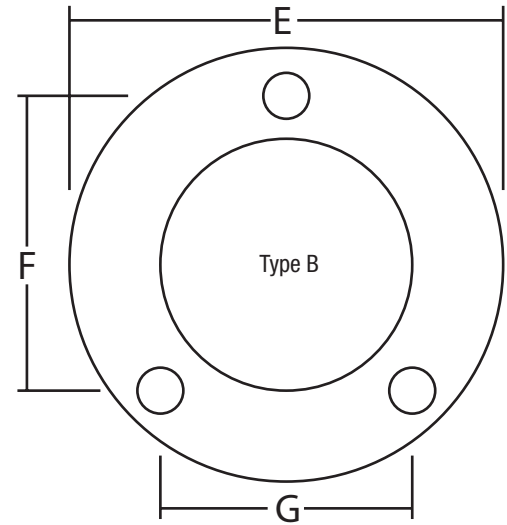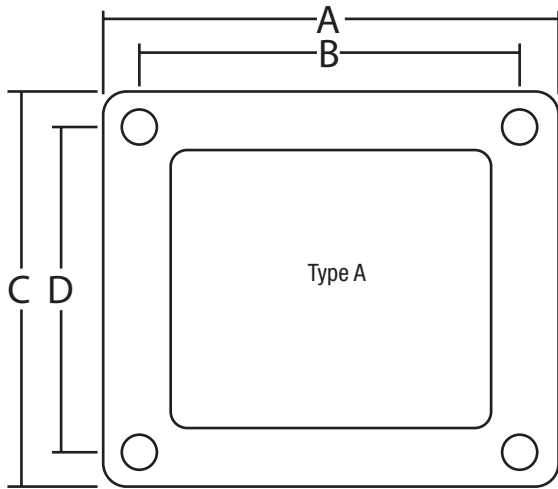

# Index

| Part #       | Pg | Part #     | Pg | Part #     | Pg       | Part #      | Pg       | Part #     | Pg |
|--------------|----|------------|----|------------|----------|-------------|----------|------------|----|
| 06-BGV12     | 18 | 61-30071   | 20 | 83-30213   | 18       | HB-RBM120   | 9        | T8-RF245   | 11 |
| 06-BGV34     | 18 | 61-30073   | 20 | 83-30280   | 18       | HB-RBM121   | 9        | T8-RF247   | 11 |
| 06-FGV1      | 18 | 61-30600   | 19 | 83-30283   | 18       | HM-R489     | 2        | T8-RF248   | 11 |
| 06-FGV112    | 18 | 61-30606   | 19 | 83-30289   | 18       | HM-RGM450   | 8        | T8-RF249   | 11 |
| 06-FGV112P   | 18 | 61-30700   | 19 | 83-30293   | 18       | HM-RGM451   | 8        | T8-RF250   | 11 |
| 06-FGV114P   | 18 | 61-30707   | 19 | 92-A8301   | 17       | HM-RGM452   | 8        | T8-RF255   | 11 |
| 06-FGV12     | 18 | 61-30708   | 19 | 92-A8301-1 | 17       | HM-RGM453   | 8        | T9-DB10-2  | 15 |
| 06-FGV12P    | 18 | 61-30800   | 19 | 92-A8303   | 17       | HM-RGM454   | 8        | T9-DB204C  | 15 |
| 06-FGV1P     | 18 | 61-30801   | 19 | 92-A8305   | 17       | HM-RGM651   | 8        | T9-DB205C  | 15 |
| 06-FGV2P     | 18 | 61-30808   | 19 | 92-A8306   | 17       | R7-RB1000   | 14       | T9-DB206C  | 15 |
| 06-FGV34     | 18 | 61-30809   | 19 | HB-RB006   | 6        | R7-RB120    | 13       | T9-DB208C  | 15 |
| 06-FGV34P    | 18 | 61-30900   | 19 | HB-RB100   | 4        | R7-RB141    | 13       | T9-DB210C  | 15 |
| 06-FGV38     | 18 | 61-31000   | 19 | HB-RB108   | 6        | R7-RB142    | 13       | T9-DB306E  | 15 |
| 06-FGV38P    | 18 | 61-31001   | 19 | HB-RB12    | 4        | R7-RB151    | 13       | T9-DB412E  | 15 |
| 06-FHGV34    | 18 | 61-31006   | 19 | HB-RB125   | 3        | R7-RB155    | 2, 13    | T9-DB416P  | 15 |
| 06-FP1212    | 18 | 61-31008   | 19 | HB-RB130   | 4        | R7-RB1600   | 14       | T9-DB6-2CR | 15 |
| 06-FP1238    | 18 | 61-31010   | 19 | HB-RB150   | 9        | R7-RB165    | 13       | T9-DF100   | 16 |
| 06-FP3458    | 18 | 61-31011   | 19 | HB-RB166   | 5, 6     | R7-RB245    | 13       | T9-DS45110 | 16 |
| 06-GWH12     | 18 | 61-31107   | 19 | HB-RB167   | 7        | R7-RB265    | 13       | T9-MD10-NC | 15 |
| 06-GWH34     | 18 | 61-31108   | 19 | HB-RB168   | 2        | R7-RB3      | 6, 12    | T9-MD10-NO | 15 |
| 06-SWV12     | 18 | 61-31200   | 19 | HB-RB168-1 | 17       | R7-RB312    | 13       | T9-MD12-NC | 15 |
| 12-451070-24 | 19 | 61-31205   | 19 | HB-RB168-2 | 17       | R7-RB33     | 3, 7, 12 | T9-MD12-NO | 15 |
| 12-457070-24 | 19 | 61-31208   | 19 | HB-RB168B  | 2        | R7-RB34     | 2, 3     | T9-MD6-NC  | 15 |
| 12-462570-24 | 19 | 61-31213   | 19 | HB-RB179   | 6        | R7-RB350    | 14       | T9-MD6-NO  | 15 |
| 12-470570-24 | 19 | 61-31401   | 19 | HB-RB21K   | 3        | R7-RB4      | 12       | T9-MD8-NC  | 15 |
| 12-475570-24 | 19 | 61-33110   | 19 | HB-RB250   | 4        | R7-RB440    | 2, 12    | T9-MD8-NO  | 15 |
| 13-536-10    | 19 | 61-33140   | 19 | HB-RB261   | 2        | R7-RB445    | 2, 14    | T9-TW208   | 16 |
| 15-26804     | 18 | 61-33150   | 19 | HB-RB27    | 8        | R7-RB446    | 2, 13    | T9-TW8-2   | 16 |
| 15-26832     | 18 | 61-33170   | 19 | HB-RB32    | 7        | R7-RB447    | 2, 14    |            |    |
| 15-C15650    | 18 | 61-33190   | 19 | HB-RB35    | 4        | R7-RB465    | 14       |            |    |
| 15-C23319    | 18 | 61-33200   | 19 | HB-RB36    | 4        | R7-RB495    | 14       |            |    |
| 15-C26822    | 18 | 61-33210   | 19 | HB-RB37    | 4        | R7-RB500    | 14       |            |    |
| 15-CG000113  | 19 | 61-65000   | 20 | HB-RB38    | 8        | R7-RB54     | 13       |            |    |
| 15-CG000138  | 19 | 61-65001   | 20 | HB-RB38-1  | 17       | R7-RB60     | 12       |            |    |
| 19-FS2-110   | 17 | 61-65009   | 20 | HB-RB38B   | 8        | R7-RB661    | 12       |            |    |
| 19-FS2-120   | 17 | 61-65010   | 20 | HB-RB39    | 8        | R7-RB663    | 12       |            |    |
| 19-FS2-130   | 17 | 61-65015   | 20 | HB-RB39B   | 8        | R7-RB665    | 12       |            |    |
| 19-FS2-160   | 17 | 61-65016   | 20 | HB-RB42    | 10       | R7-RB70     | 12       |            |    |
| 19-LS2-120   | 17 | 61-65017   | 20 | HB-RB45    | 10       | R7-RB760    | 14       |            |    |
| 19-LS2-135   | 17 | 61-65019   | 20 | HB-RB513   | 5        | R7-RB885    | 12       |            |    |
| 19-LS2-145   | 17 | 61-70550   | 20 | HB-RB53    | 7        | R7-RB90     | 12       |            |    |
| 19-LS2-150   | 17 | 61-70570   | 20 | HB-RB555   | 8        | R7-RB938    | 14       |            |    |
| 19-LS2-160   | 17 | 61-70606   | 20 | HB-RB58    | 5        | R7-RB965    | 14       |            |    |
| 19-LS2-180   | 17 | 61-70721   | 20 | HB-RB59    | 5        | R7-RB991    | 12       |            |    |
| 19-LS2-190   | 17 | 61-70722   | 20 | HB-RB61    | 5, 10    | T1-RF100-2  | 5        |            |    |
| 19-LS2-200   | 17 | 61-70766   | 20 | HB-RB621   | 5        | T8-CFC-T24  | 11       |            |    |
| 19-LS2-200F  | 17 | 61-83491   | 19 | HB-RB63    | 4        | T8-CFC-T24P | 11       |            |    |
| 19-LS2-240   | 17 | 61-83521   | 19 | HB-RB64    | 4, 7, 10 | T8-CFC-T72  | 11       |            |    |
| 19-LS2-250   | 17 | 61-83561   | 19 | HB-RB65    | 4        | T8-CFC-T72P | 11       |            |    |
| 19-LS2-275   | 17 | 61-83581   | 19 | HB-RB66    | 10       | T8-CFG-120M | 11       |            |    |
| 19-LS2-290   | 17 | 61-84331   | 20 | HB-RB67    | 7        | T8-CFG-120P | 11       |            |    |
| 19-LS2-320   | 17 | 61-84351   | 20 | HB-RB67-1  | 17       | T8-CFG-150M | 11       |            |    |
| 19-SF2-115   | 17 | 61-84352   | 20 | HB-RB67-3  | 17       | T8-CFG-254M | 11       |            |    |
| 29-159-1     | 17 | 61-84371   | 20 | HB-RB68    | 3        | T8-CFG-60M  | 11       |            |    |
| 29-159-3     | 17 | 61-84372   | 20 | HB-RB69    | 10       | T8-CFG-80M  | 11       |            |    |
| 29-159-5     | 17 | 61-84380   | 20 | HB-RB74K   | 3        | T8-CFG-92M  | 11       |            |    |
| 61-30002     | 20 | 61-84385   | 20 | HB-RB79    | 3, 10    | T8-RF200    | 11       |            |    |
| 61-30003     | 20 | 625-AF10   | 15 | HB-RB82    | 3, 4, 10 | T8-RF201    | 11       |            |    |
| 61-30007     | 20 | 625-AF12   | 15 | HB-RB822   | 10       | T8-RF202    | 11       |            |    |
| 61-30009     | 20 | 625-AF14   | 15 | HB-RB83    | 6        | T8-RF205    | 11       |            |    |
| 61-30021     | 20 | 625-AF6    | 15 | HB-RB84    | 10       | T8-RF210    | 11       |            |    |
| 61-30022     | 20 | 625-AF8    | 15 | HB-RB86    | 10       | T8-RF215    | 11       |            |    |
| 61-30031     | 20 | 78-SC1600L | 16 | HB-RB861   | 7        | T8-RF220    | 11       |            |    |
| 61-30033     | 20 | 83-30200   | 18 | HB-RB944   | 6, 9     | T8-RF225    | 11       |            |    |
| 61-30035     | 20 | 83-30201   | 18 | HB-RB949   | 9        | T8-RF230    | 11       |            |    |
| 61-30061     | 20 | 83-30202   | 18 | HB-RB95    | 5        | T8-RF235    | 6, 7, 11 |            |    |
| 61-30065     | 20 | 83-30203   | 18 | HB-RB96    | 9        | T8-RF237    | 11       |            |    |
|              |    | 83-30209   | 18 | HB-RB981   | 2        | T8-RF240    | 11       |            |    |



# ALLTEMP

ROTOM® is a registered trade mark of ALLTEMP® PRODUCTS COMPANY LIMITED. ALLTEMP® has made an effort to illustrate with photos, outline drawings and/or descriptions, the products in this catalogue. These are for the sole purpose of identification. We do not express or imply that products conform exactly to the descriptions, drawings and/or photos. All reasonable effort has been made to accurately determine a suitable product. However, all users are solely responsible to determine for themselves the suitability of the product purchased for the use intended. All information, data and dimension tables in this catalogue have been carefully compiled and thoroughly checked. However, no responsibility for possible errors or omissions can be assumed. The company reserves the right to change specifications and other information included in this catalogue without notice. The vendor's responsibility shall be limited only to its written warranty and the vendor shall not be responsible for any loss, cost or damage whatsoever from the use of this product by you or your customers.