

ALLTEMP[®]

EQUIPMENT MOUNTING SOLUTIONS

MOUNTING PAD SELECTION GUIDE



TABLE OF CONTENTS



03...GEN PAD

06...E LITE® PAD

07...ECOPAD™

08...HUNKLITE™ / HEAT PUMP PAD

09...ULTRALITE®

10...CLADLITE®

ALLTEMP 

SOLUTIONS
FOR
EQUIPMENT
MOUNTING

PADS





GENPAD®

GenPad concrete generator pads are the answer for contractors who need a professional looking pad that will provide a lifetime base for their generator installations.

Each GenPad is made from high strength fibers and cement and is warrantied for life. These pads provide a sturdy, permanent base for the generator that won't shift or degrade over time. Give your customers even more peace of mind with their generator purchase when you add the reliable GenPad.



FEATURES & BENEFITS:

- **Manufactured with a unique process providing twice the strength and half the weight of standard concrete.**
- **Smooth, consistent appearance looks great under all generators**
- **High impact and breakage resistant**
- **Fiber reinforced concrete that is further reinforced with rebar**
- **Flat bottom to facilitate easy leveling of the pad and generator**
- **Virtually eliminates sinking of the unit into the ground**
- **Fast and easy to install**
- **Offered in 3" and 4" heights (4" pad is hurricane rated)**
- **Ships in Pallet quantities - 5 per pallet**

COMPOSITE GENPAD®



The new Composite GENPAD is the lightweight pad option for fast and easy installations. Light enough to be handled by one person, the composite pad material is durable and strong, while simplifying and speeding installation.



STRONG & LIGHTWEIGHT

- 33 lbs total pad weight
- Easy to handle and install by just one person
- Increased load capacity vs regular GenPad

ADVANCED COMPOSITE MATERIAL

- Manufactured with thermoset sheet molding compound reinforced with fiberglass
- Specifically designed to distribute generator weight over entire pad surface
- Certified to UV resistant standard UL746C - resists fading
- Flammability rated UL94-5V and NFPA 37

PROFESSIONAL LOOK & FEEL

- Textured top surface and gray color for natural looking base
- Mounting bolt score marks for quick unit alignment and fast installation
- Includes hardware for mounting

LOWER COST SHIPPING

- Reduces stack height by 33%
- 5 pads are only 11" tall
- Nestable design saves space and adds stability during transport
- Pads lock in place during transit
- Ships in Pallet quantities - 5 per pallet

GENPAD®

GENERAC® STANDBY GENERATORS

Concrete GENPAD® 3" for Air-Cooled Units

GENERAC ITEM #	CAT#	DESCRIPTION	WEIGHT PER PAD (LB)	UNITS PER PALLET
10000007852	FG5431-3GY	54" x 31" x 3"	200	5

Concrete GENPAD® 4" for Air-Cooled Units

GENERAC ITEM #	CAT#	DESCRIPTION	WEIGHT PER PAD (LB)	UNITS PER PALLET
10000007848	FG5431-4GY	54" x 31" x 4"	275	5

Composite GENPAD® 3" for Air-Cooled Units

GENERAC ITEM #	CAT#	DESCRIPTION	WEIGHT PER PAD (LB)	UNITS PER PALLET
A0003322319	CG3154-3GY	54" x 31" x 3"	33	5

KOHLER® STANDBY GENERATORS

Concrete Generator Pad 3" for Air-Cooled Units

KOHLER ITEM #	CAT#	DESCRIPTION	WEIGHT PER PAD (LB)	UNITS PER PALLET
GM104820-KP1-QS	FG3253-3K	32" x 53" x 3"	200	5

Concrete Generator Pad 4" for Air-Cooled Units

KOHLER ITEM #	CAT#	DESCRIPTION	WEIGHT PER PAD (LB)	UNITS PER PALLET
GM104820-KP2-QS	FG3253-4K	32" x 53" x 4"	275	5

Generac® is a registered trademark of Generac Corporation.
Kohler® is a registered trademark of Kohler Corporation.

E LITE[®] PAD

The most popular plastic DiversiTech pad due to its outstanding durability, uniform strength, and low weight.



FEATURES

- Made in the USA
- Unaffected by UV or weather
- Uniform and generous ribbing provide self-leveling ground support without inserts
- ASTM D2299, ASTM C67

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EL2424-2	24 x 24 x 2	840 lbs	44	7 lbs
EL2436-2	24 x 36 x 2	960 lbs	24	9 lbs
EL2626-2	26 x 26 x 2	1080 lbs	24	11 lbs
EL3030-2	30 x 30 x 2	920 lbs	24	8 lbs
EL3036-2	30 x 36 x 2	1080 lbs	24	11 lbs
EL3232-2	32 x 32 x 2	1200 lbs	24	13 lbs
EL3434-2	34 x 34 x 2	1260 lbs	24	14 lbs
EL3636-2	36 x 36 x 2	1160 lbs	24	13 lbs
EL3434-2	34 x 48 x 2	1240 lbs	24	14 lbs
EL3636-2	36 x 36 x 2	1320 lbs	24	16 lbs
EL3640-2	36 x 40 x 2	1400 lbs	24	18 lbs
EL3648-2	36 x 48 x 2	1560 lbs	24	19 lbs
EL3842-2	38 x 42 x 2	1480 lbs	24	19 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EL1838-3	18 x 38 x 3	1000 lbs	32	16 lbs
EL2424-3	24 x 24 x 3	840 lbs	16	12 lbs
EL2436-3	24 x 36 x 3	1080 lbs	16	19 lbs
EL2448-3	24 x 48 x 3	1320 lbs	32	14 lbs
EL3030-3	30 x 30 x 3	1080 lbs	16	20 lbs
EL3232-3	32 x 32 x 3	1160 lbs	16	21 lbs
EL3244-3	32 x 44 x 3	1400 lbs	16	30 lbs
EL3636-3	36 x 36 x 3	1320 lbs	16	28 lbs
EL3640-3	36 x 40 x 3	1400 lbs	16	31 lbs
EL3648-3	36 x 48 x 3	1560 lbs	16	36 lbs
EL3842-3	38 x 42 x 3	1480 lbs	16	33 lbs
EL3870-3	38 x 70 x 3	2040 lbs	16	36 lbs
EL4040-3	40 x 40 x 3	1480 lbs	16	34 lbs
EL4558-3	45 x 58 x 3	1940 lbs	16	33 lbs
EL4848-3	48 x 48 x 3	1800 lbs	16	36 lbs
EL5042-3	50 x 42 x 3	1720 lbs	16	28 lbs
EL5060-3	50 x 60 x 3	2080 lbs	16	40 lbs
EL5070-3	50 x 70 x 3	2280 lbs	16	47 lbs
EL5252-3	52 x 52 x 3	1960 lbs	16	48 lbs
EL5658-3	56 x 58 x 3	2160 lbs	16	43 lbs

ECOPAD™

The EcoPad™ is made from injection molded plastic, and the application is mainly as a base pad for ground supported equipment. Where local codes supersede the national code and require a pad thicker than 2", use a 3" thick pad.



FEATURES

- Durable and lightweight for standard applications
- Unaffected by UV or weather
- Individually engineered ribbing for cost-effective self-leveling ground support
- Made in the USA
- ASTM D2299, ASTM C67

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EP2424-2	24 x 24 x 2	840 lbs	24	7 lbs
EP2436-2	24 x 36 x 2	1080 lbs	24	11 lbs
EP2626-2	26 x 26 x 2	920 lbs	24	8 lbs
EP3030-2	30 x 30 x 2	1080 lbs	24	11 lbs
EP3036-2	30 x 36 x 2	1200 lbs	24	13 lbs
EP3232-2	32 x 32 x 2	1160 lbs	24	13 lbs
EP3434-2	34 x 34 x 2	1240 lbs	24	14 lbs
EP3636-2	36 x 36 x 2	1320 lbs	24	16 lbs
EP3648-2	36 x 48 x 2	1560 lbs	24	29 lbs
EP3842-2	38 x 42 x 2	1480 lbs	24	19 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EP1838-3	18 x 38 x 3	1000 lbs	32	16 lbs
EP2424-3	24 x 24 x 3	840 lbs	16	9 lbs
EP2436-3	24 x 36 x 3	1080 lbs	16	19 lbs
EP2448-3	24 x 48 x 3	1320 lbs	32	14 lbs
EP3030-3	30 x 30 x 3	1080 lbs	15	20 lbs
EP3232-3	32 x 32 x 3	1160 lbs	15	21 lbs
EP3434-3	34 x 34 x 3	1240 lbs	15	17 lbs
EP3636-3	36 x 36 x 3	1320 lbs	16	28 lbs
EP3640-3	36 x 40 x 3	1400 lbs	16	31 lbs
EP3648-3	36 x 48 x 3	1560 lbs	16	36 lbs
EP3842-3	38 x 42 x 3	1480 lbs	16	33 lbs
EP3870-3	38 x 70 x 3	2040 lbs	16	36 lbs
EP4040-3	40 x 40 x 3	1480 lbs	16	34 lbs
EP4558-3	45 x 58 x 3	1940 lbs	16	33 lbs
EP4848-3	48 x 48 x 3	1800 lbs	16	29 lbs
EP5042-3	50 x 42 x 3	1720 lbs	16	28 lbs
EP5060-3	50 x 60 x 3	2080 lbs	16	40 lbs
EP5070-3	50 x 70 x 3	2280 lbs	16	47 lbs
EP5252-3	52 x 52 x 3	1960 lbs	16	48 lbs
EP5658-3	56 x 58 x 3	2160 lbs	16	43 lbs

HUNKLITE™

Solid concrete pad designed for use as external/ internal ground support for HVAC equipment. Where local codes supersede the national code and require a pad thicker than 2", use a 3" thick pad.

FEATURES

- No buoyancy — ideal for coastal regions
- Made in the USA
- Lightweight concrete and hollow bottom with rib support to add strength and remove weight to make easier to handle
- Will support concrete anchors
- ASTM D2299, ASTM C67



ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
2" THICK PADS				
L2436-2	24 x 36 x 2	1920 LBS	20	55 LBS
L3636-2	36 x 36 x 2	2400 lbs	15	120 lbs
3" THICK PADS				
L2424-3	24 x 24 x 3	1440 lbs	15	52 lbs
L2436-3	24 x 36 x 3	1920 lbs	15	106 lbs
L3030-3	30 x 30 x 3	1920 lbs	15	69 lbs
L3036-3	30 x 36 x 3	2160 lbs	15	94 lbs
L3048-3	30 x 48 x 3	2640 lbs	15	120 lbs
L3232-3	32 x 32 x 3	2080 lbs	15	87 lbs
L3636-3	36 x 36 x 3	2400 lbs	10	105 lbs
L3642-3	36 x 42 x 3	2640 lbs	10	120 lbs
L3648-3	36 x 48 x 3	2880 lbs	10	135 lbs
L3842-3	38 x 42 x 3	2720 lbs	10	215 lbs

HEAT PUMP PAD

Ideal for snowy climates, the Heat Pump Pad protects the unit with a full 8" clearance above ground. Standard with each unit are 8 anti-vibration pads specifically designed to fit into molded slots at tops of the Heat Pump Pad. These are designed to provide a more quiet operation of the heat pump.

FEATURES

- Pad base is angled outward to direct melting snow and condensate away from the unit
- Built tough for many years of surface
- Pads are nestable and stackable, using minimum space for storage



ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
HP3232-8	32 x 32 x 8	307 LBS	16	18 LBS
HP3636-8	36 x 36 x 8	389 lbs	16	18 lbs

ULTRALITE®

The lightest weight cement-based pad for ease of handling and proven durability.



FEATURES

- Heavy-duty, yet ultra-lightweight
- Freeze/thaw, UV, chemical & flame-resistant for long-term life outdoors
- Earthquake Code compliant pads available for use in the relevant West Coast locations
- ASTM D2299, ASTM C67
- Extensive selection of sizes available including wedge-shaped pad

3" THICK PADS


ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
UC1636-3	16 x 36 x 3	368 lbs	15	18 lbs
UC1838-3	18 x 38 x 3	400 lbs	30	20.2 lbs
UC1838-3CA	18 x 38 x 3	400 lbs	15	20.2 lbs
UC2424-3	24 x 24 x 3	336 lbs	15	18 lbs
UC2424-3CA	24 x 24 x 3	336 lbs	15	18 lbs
UC2430-3	24 x 30 x 3	390 lbs	15	23 lbs
UC2436-3	24 x 36 x 3	432 lbs	15	26 lbs
UC2436-3CA	24 x 36 x 3	432 lbs	15	26 lbs
UC2442-3	24 x 42 x 3	480 lbs	15	28 lbs
UC2448-3	24 x 48 x 3	528 lbs	15	28 lbs
UC2448-3CA	24 x 48 x 3	528 lbs	15	29 lbs
UC2626-3	26 x 26 x 3	368 lbs	15	17 lbs
UC3030-3	30 x 30 x 3	432 lbs	15	23 lbs
UC3030-3CA	30 x 30 x 3	432 lbs	15	24 lbs
UC3036-3	30 x 36 x 3	460 lbs	15	31 lbs
UC3036-3CA	30 x 36 x 3	460 lbs	15	30 lbs
UC3040-3	30 x 40 x 3	512 lbs	15	33 lbs
UC3132-3L	31 x 32 x 3	460 lbs	15	27 lbs
UC3232-3	32 x 32 x 3	464 lbs	15	26 lbs
UC3232-3CA	32 x 32 x 3	464 lbs	15	27 lbs
UC3237-3	32 x 37 x 3	504 lbs	15	27 lbs
U3353-3	33 x 53 x 3	595 lbs	15	68 lbs
UC3434-3	34 x 34 x 3	496 lbs	15	27 lbs
UC3445-3	34 x 45 x 3	584 lbs	15	39 lbs
UC3539-3L	35 x 39 x 3	528 lbs	15	36 lbs
UC3636-3	36 x 36 x 3	528 lbs	15	34 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
UC3636-3CA	36 x 36 x 3	528 lbs	15	35 lbs
U3642-3	36 x 42 x 3	576 lbs	15	32 lbs
UC3642-3CA	36 x 42 x 3	576 lbs	15	33 lbs
UC3648-3	36 x 48 x 3	624 lbs	15	37 lbs
UC3648-3CA	36 x 48 x 3	624 lbs	15	38 lbs
U3650-3	36 x 50 x 3	659 lbs	15	38 lbs
U3654-3	36 x 54 x 3	715 lbs	15	71 lbs
U3660-3	36 x 60 x 3	723 lbs	15	49 lbs
UC3842-3	38 x 42 x 3	592 lbs	15	35 lbs
U3865-3	38 x 65 x 3	701 lbs	15	85 lbs
U3870-3	38 x 70 x 3	709 lbs	15	113 lbs
UC4040-3	40 x 40 x 3	592 lbs	15	34 lbs
UC4040-3CA	40 x 40 x 3	592 lbs	15	35 lbs
UC4042-3	40 x 42 x 3	608 lbs	15	36 lbs
UC4044-3L	40 x 44 x 3	620 lbs	15	38 lbs
U4054-3	40 x 54 x 3	719 lbs	15	81 lbs
U4550-3	45 x 50 x 3	712 lbs	15	81 lbs
U4558-3	45 x 58 x 3	776 lbs	15	93 lbs
U4848-3	48 x 48 x 3	720 lbs	15	85 lbs
U4854-3	48 x 54 x 3	768 lbs	15	91 lbs
U4866-3	48 x 66 x 3	864 lbs	15	108 lbs
U5053-3	50 x 53 x 3	776 lbs	15	92 lbs
U5056-3	50 x 56 x 3	800 lbs	15	97 lbs
U5252-3	52 x 52 x 3	784 lbs	15	94 lbs
U5557-3	55 x 57 x 3	848 lbs	15	109 lbs

CLADLITE®

The strength and look of a perfectly poured concrete pad without the extreme weight!

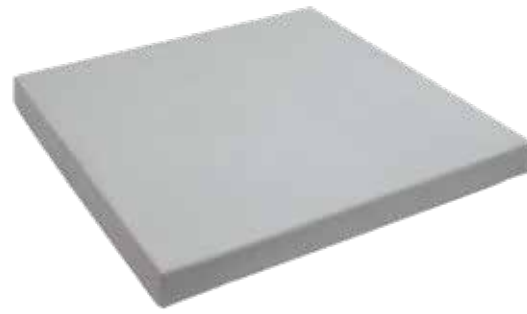

FEATURES

- High PSI strength concrete surrounding a lightweight core
- Up to 80% lighter than solid concrete for ease of installation
- Freeze/thaw, UV, chemical & flame resistant for long-term life outdoors
- ASTM D2299, ASTM C67
- Extensive selection of sizes available including round pads

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
2436-2	24 x 36 x 2	576 lbs	24	61 lbs
2442-2	24 x 42 x 2	648 lbs	24	57 lbs
3030-2	30 x 30 x 2	576 lbs	24	36 lbs
3036-2	30 x 36 x 2	648 lbs	12	43 lbs
3040-2	30 x 40 x 2	696 lbs	12	53 lbs
3232-2	32 x 32 x 2	624 lbs	12	44 lbs
3434-2	34 x 34 x 2	672 lbs	12	51 lbs
3636-2	36 x 36 x 2	720 lbs	12	63 lbs
3640-2	36 x 40 x 2	768 lbs	12	71 lbs
3648-2	38 x 48 x 2	864 lbs	12	88 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
1636-3	16 x 36 x 3	480 lbs	20	48 lbs
2424-3	24 x 24 x 3	432 lbs	20	43 lbs
2436-3	24 x 36 x 3	576 lbs	20	60 lbs
2448-3	24 x 48 x 3	720 lbs	20	84 lbs
3030-3	30 x 30 x 3	576 lbs	20	62 lbs
3036-3	30 x 36 x 3	648 lbs	10	73 lbs
3232-3	32 x 32 x 3	624 lbs	10	68 lbs
3237-3	32 x 37 x 3	648 lbs	10	73 lbs
3636-3	36 x 36 x 3	720 lbs	10	80 lbs
3640-3	36 x 40 x 3	768 lbs	10	97 lbs
3648-3	36 x 48 x 3	864 lbs	10	109 lbs
3660-3	36 x 60 x 3	1008 lbs	10	163 lbs
3842-3	38 x 42 x 3	816 lbs	10	120 lbs
4042-3	40 x 42 x 3	840 lbs	10	158 lbs
4550-3	45 x 50 x 3	996 lbs	10	184 lbs
4558-3	45 x 58 x 3	1092 lbs	10	203 lbs
4766-3	47 x 66 x 3	212 lbs	10	219 lbs
4848-3	48 x 48 x 3	1008 lbs	10	1884 lbs
5053-3	50 x 53 x 3	1092 lbs	10	197 lbs



EQUIPMENT MOUNTING SOLUTIONS



ALLTEMP



Alltemp Products Co. Ltd.
2-905 Sandy Beach Rd.

alltemp.ca

