



**ALLTEMP** 

[www.alltemp.ca](http://www.alltemp.ca)

---

**ELECTRICAL FITTINGS**

CATALOGUE

---



# ***TABLE OF CONTENTS***


---

<i>Rigid Fittings .....</i>	<i>1-10</i>
<i>EMT Fittings.....</i>	<i>11-18</i>
<i>Conduit Bodies .....</i>	<i>19-28</i>
<i>Liquid Tight Fittings .....</i>	<i>29-32</i>
<i>Bushings &amp; Knockout Plugs .....</i>	<i>33-35</i>
<i>Cable Cord Grips .....</i>	<i>36-37</i>
<i>NM, Flex &amp; BX Connectors .....</i>	<i>37-43</i>
<i>Service Entrance .....</i>	<i>44-45</i>
<i>Blanks with Knockout Plugs .....</i>	<i>46-47</i>
<i>Pipe, NM &amp; BX Strpas .....</i>	<i>48-50</i>
<i>Strut Accessories .....</i>	<i>50</i>
<i>Cable Fastenings .....</i>	<i>50</i>



## Malleable Rigid Set Screw Box Connector

- Connect Thread-less Rigid Conduit to boxes and enclosures
- Malleable Iron
- Concrete Tight
- Male Hub Thread (NPT)
- Zinc Finish





CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4340	1/2"	1.30"	0.75"	1.10"	25	250
MI4341	3/4"	1.40"	0.91"	1.33"	25	250
MI4342	1"	1.54"	0.96"	1.61"	25	100
MI4343	1-1/4"	1.97"	1.30"	1.95"	5	50
MI4344	1-1/2"	2.09"	1.40"	2.18"	5	50
MI4345	2"	2.32"	1.57"	2.67"	-	20



## Malleable Rigid Set Screw Couplings

- Couple Sections of Thread-less Rigid Conduit together
- Malleable Iron
- Concrete Tight
- Zinc Finish




CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI4350	1/2"	1.46"	1.10"	0.86"	0.63"	25	250
MI4351	3/4"	1.40"	1.33"	1.05"	0.63"	25	250
MI4352	1"	1.93"	1.61"	1.36"	0.63"	10	100
MI4353	1-1/4"	1.97"	1.95"	1.69"	0.63"	5	50
MI4354	1-1/2"	2.09"	2.18"	1.90"	0.63"	5	50
MI4355	2"	2.32"	2.67"	2.40"	0.63"	-	20




## Rigid Short Radius Elbows

- For Connecting Rigid Conduit or IMC to an Outlet Box in Tight Radius Applications
- Zinc Die Cast



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4408	1/2"	0.95"	0.95"	25	250
MI4409	3/4"	1.16"	1.00"	15	150


## Rigid Steel Compression Box Connector



- Connect Thread-less Rigid Conduit to boxes and enclosures
- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4360	1/2"	1.37"	0.50"	1.22"	20	200
MI4361	3/4"	1.44"	0.53"	1.46"	10	100
MI4362	1"	1.72"	0.67"	1.72"	5	50
MI4363	1-1/4"	1.93"	0.68"	2.15"	5	50
MI4364	1-1/2"	2.03"	0.72"	2.36"	-	12
MI4365	2"	2.02"	0.72"	2.89"	-	12


## Rigid Steel Compression Insulated Box Connector



- Connect Thread-less Rigid Conduit to boxes and enclosures
- Zinc Plated Steel
- Insulated Throat
- Concrete Tight
- Male Hub Thread (NPT)

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4370	1/2"	1.37"	0.51"	1.22"	20	200
MI4371	3/4"	1.44"	0.53"	1.46"	10	100
MI4372	1"	1.72"	0.67"	1.72"	5	50
MI4373	1-1/4"	1.93"	0.68"	2.15"	5	50
MI4374	1-1/2"	2.03"	0.72"	2.36"	-	12
MI4375	2"	2.02"	0.72"	2.89"	-	12

## Rigid Steel Compression Couplings



- Couple Sections of Thread-less Rigid Conduit together
- Zinc Pated Steel
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4380	1/2"	1.83"	1.22"	10	100
MI4381	3/4"	1.97"	1.46"	10	100
MI4382	1"	2.11"	1.72"	5	50
MI4383	1-1/4"	2.39"	2.15"	5	50
MI4384	1-1/2"	2.52"	2.36"	-	12
MI4385	2"	2.40"	2.89"	-	5

- Connect Threaded Rigid Conduit
- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX
		LENGTH	OD	
MI4387	1/2"	1.63"	1.01"	100
MI4388	3/4"	1.64"	1.25"	50
MI4389	1"	1.97"	1.53"	30
MI4390	1-1/4"	2.03"	1.87"	25
MI4391	1-1/2"	2.06"	2.16"	25
MI4392	2"	2.13"	2.65"	20
MI4393	2-1/2"	3.19"	3.25"	12
MI4394	3"	3.31"	3.87"	12
MI4395	3-1/2"	3.41"	4.50"	12
MI4396	4"	3.52"	4.88"	6
MI4397	5"	3.95"	6.00"	2
MI4398	6"	4.25"	7.20"	1



- Used to Join 2 lengths of Threaded Conduit when Neither Can Be Rotated
- Threaded (NPT) for Rigid Conduit and IMC
- Concrete Tight

CAT. NO.	TRADE SIZE	DIMENSIONS								INNER BOX	OUTER BOX
		A	B	C	D	E	F	G			
MI4440	1/2"	1.01"	0.869"	1.30"	0.788"	0.981"	0.775"	1.05"	20	200	
MI4441	3/4"	1.20"	1.10"	1.55"	.970"	1.19"	0.965"	1.25"	10	100	
MI4442	1"	1.52"	1.33"	1.78"	1.22"	1.50"	1.23"	1.58"	5	50	
MI4443	1-1/4"	1.91"	1.69"	2.20"	1.58"	1.85"	1.56"	1.90"	5	50	
MI4444	1-1/2"	2.15"	1.93"	2.50"	1.83"	2.10"	1.78"	2.20"	3	30	
MI4445	2"	2.65"	2.40"	3.08"	2.25"	2.58"	2.25"	2.75"	-	20	
MI4446	2-1/2"	3.20"	2.90"	3.75"	2.70"	3.10"	2.70"	3.31"	-	10	
MI4447	3"	3.85"	3.58"	4.40"	3.35"	3.82"	3.30"	4.40"	-	5	
MI4448	3-1/2"	4.09"	4.05"	5.04"	4.10"	4.15"	4.00"	4.90"	-	5	
MI4449	4"	4.89"	4.55"	5.40"	4.30"	4.85"	4.33"	5.02"	-	2	
MI4450	5"	5.89"	5.55"	6.75"	5.43"	5.84"	5.43"	5.93"	-	1	
MI4451	6"	6.93"	6.62"	7.62"	6.50"	6.81"	6.50"	6.87"	-	1	


## Malleable Rigid Couplings

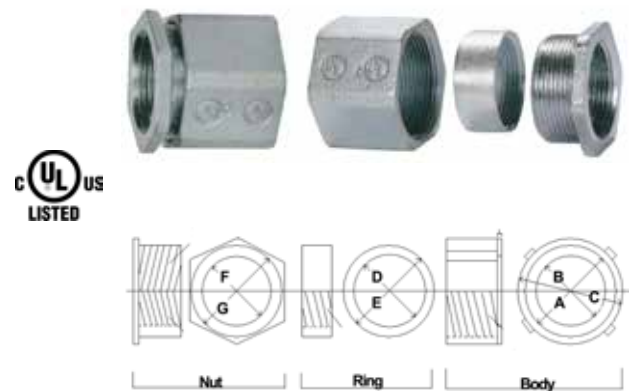

- A Speed Union for Economically Joining 2 Threaded Rigid Metal Conduits
- A Neoprene Gasket provides a Concrete Tight Seal at the Joint
- Use where Conduit Runs are Closely Spaced; or Conduit is tight against Wall, Ceiling or other Obstruction
- Use where Conduits Cannot be Rotated

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4452	2"	2.75"	2.04"	3.30"	5	25
MI4453	2-1/2"	3.20"	2.98"	4.23"	2	10
MI4454	3"	3.85"	3.14"	4.85"	2	10
MI4455	3-1/2"	4.48"	3.26"	5.36"	1	5
MI4456	4"	4.83"	3.34"	6.07"	1	5

## Malleable Rigid Split Couplings

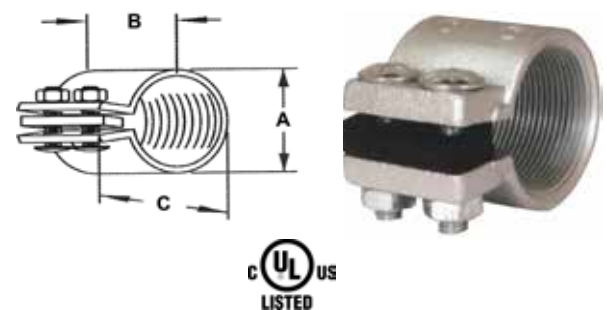

## 90° Galvanized Rigid Conduit Elbows



- Galvanized
- Rigid & IMC
- NPT Thread
- For use with conduit

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
M16101	90°	1/2"	-	-	-	50
M16102	90°	3/4"	-	-	-	50
M16103	90°	1"	-	-	-	25
M16104	90°	1-1/4"	-	-	-	20
M16105	90°	1-1/2"	-	-	-	15
M16106	90°	2"	-	-	-	10
M16107	90°	2"	24"	35"	11"	108
M16108	90°	2"	36"	48"	12"	108
M16109	90°	2"	48"	60"	12"	108
M16110	90°	2-1/2"	-	-	-	50
M16111	90°	2-1/2"	24"	35"	11"	70
M16112	90°	2-1/2"	36"	48"	12"	70
M16113	90°	2-1/2"	48"	60"	12"	108
M16114	90°	3"	-	-	-	35
M16115	90°	3"	24"	35"	11"	48
M16116	90°	3"	36"	48"	12"	48
M16117	90°	3"	48"	60"	12"	48
M16118	90°	3-1/2"	-	-	-	35
M16119	90°	4"	-	-	-	35
M16120	90°	4"	24"	35"	11"	40
M16121	90°	4"	36"	48"	12"	40
M16122	90°	4"	48"	60"	12"	40

## 45° Galvanized Rigid Conduit Elbows



- Galvanized
- Rigid & IMC
- NPT Thread
- For use with conduit

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
M16151	45°	1/2"	-	-	-	50
M16152	45°	3/4"	-	-	-	50
M16153	45°	1"	-	-	-	25
M16154	45°	1-1/4"	-	-	-	20
M16155	45°	1-1/2"	-	-	-	15
M16156	45°	2"	-	-	-	10
M16157	45°	2"	24"	16"	12"	108
M16158	45°	2"	36"	19"	12"	108
M16159	45°	2"	48"	23"	12"	108
M16160	45°	2-1/2"	-	-	-	50
M16161	45°	2-1/2"	24"	16"	12"	70
M16162	45°	2-1/2"	36"	19"	12"	70
M16163	45°	2-1/2"	48"	23"	12"	70
M16164	45°	3"	-	-	-	35
M16165	45°	3"	24"	16"	12"	48
M16166	45°	3"	36"	19"	12"	48
M16167	45°	3"	48"	23"	12"	48
M16168	45°	3-1/2"	-	-	-	35
M16172	45°	4"	-	-	-	35
M16173	45°	4"	24"	16"	12"	40
M16174	45°	4"	36"	19"	12"	40
M16175	45°	4"	48"	23"	12"	40

## 22-1/2° Galvanized Rigid Conduit Elbows




CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
MR1605022	22-1/2°	1/2"	4"	7-3/4"	1-1/2"	50
MR1607522	22-1/2°	3/4"	4-1/2"	8-5/8"	1-3/4"	50
MR1610022	22-1/2°	1"	5-3/4"	10-5/8"	2-1/8"	25
MR1612522	22-1/2°	1-1/4"	7-1/4"	12-1/4"	2-1/2"	20
MR1615022	22-1/2°	1-1/2"	8-1/4"	14-1/2"	2-7/8"	15
MR1620022	22-1/2°	2"	9-1/2"	17-3/8"	23-1/2"	10
MR1625022	22-1/2°	2-1/2"	10-1/2"	19-1/4"	3-7/8"	108
MR1630022	22-1/2°	3"	13"	24-1/8"	4-3/4"	108
MR1635022	22-1/2°	3-1/2"	15"	28-7/8"	5-3/4"	108
MR1640022	22-1/2°	4"	16"	29"	7-7/8"	50
MR1640022R48	22-1/2°	4"	48"	39-1/2"	9-1/2"	70



## EMT/Rigid To EMT/Rigid Combination Pulling Elbow - Zinc

- Used to facilitate pulling conductors through a sharp bend in a run of EMT, Threaded Rigid or IMC conduit
- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket facilitates wire pulling
- Combo Head Set Screws


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI5044	1/2"	1.37"	1.01"	2.63"	1.78"	20	200




## Rigid to Rigid Pull Elbows - Zinc Die Cast

- For use as a Wire Pulling Elbow to Facilitate Wire Pulling on a Sharp Bend in run of Threaded Rigid or IMC Conduit
- Removable Cover allows easy access to facilitate wire pulling
- Furnished with Neoprene Gasket and Cover
- Rain Tight

CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
MI4400	1/2"	1.31"	1.03"	0.99"	100
MI4401	3/4"	1.39"	1.30"	1.26"	50
MI4402	1"	1.96"	1.55"	1.52"	30
MI4403	1-1/4"	2.32"	1.90"	1.91"	20




## Rigid to Box Pull Elbows - Zinc Die Cast



- For Connecting Threaded Rigid Conduit or IMC to Box or Enclosures to Form 90° bend
- Removable Cover allows easy access to Facilitate Wire Pulling
- Furnished with Neoprene Gasket and Cover
- Rain Tight

CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
MI4404	1/2"	1.34"	1.03"	0.97"	100
MI4405	3/4"	1.40"	1.30"	1.19"	50
MI4406	1"	1.97"	1.55"	1.51"	30
MI4407	1-1/4"	2.32"	1.90"	1.91"	20

## Straight Malleable Concrete Slab Inserts For Threaded Rigid Conduit



- Allows In-Slab Ceiling Drops & Floor Mounts in Poured Concrete
- Provides Flush Threaded Conduit Hub for mounting, pulling, & future access to conduit systems
- Design allows In-Slab Conduit System Prefabrication
- Designed for Straight Through Conduit Runs and Mounting of Floor boxes in slabs over 6" thick

CAT. NO.	TRADE SIZE	DIMENSIONS			OUTER BOX
		A	B	C	
MI4420	1/2"	1.50"	1.75"	1.25"	20
MI4421	3/4"	2.72"	2.00"	1.75"	20
MI4422	1"	2.50"	3.25"	1.50"	10

## 90° Malleable Concrete Slab Inserts For Threaded Rigid Conduit



- Allows In-Slab Ceiling Drops & Floor Mounts in Poured Concrete
- Provides Flush Threaded Conduit Hub for mounting, pulling, and future access to conduit systems
- Allows In-Slab Conduit System Prefabrication - Flush Design
- Designed to Eliminate Bending of conduit in slabs over 4" thick
- Designed for 90° Bends Through Conduit Runs


CAT. NO.	TRADE SIZE	DIMENSIONS				OUTER BOX
		A	B	C	D	
MI4423	1/2"	1.50"	1.75"	3.12"	3.62"	20
MI4424	3/4"	2.75"	2.00"	3.06"	3.68"	20
MI4425	1"	2.50"	3.75"	2.93"	3.68"	10



- Use as an Offset Connector between Two Enclosures
- To Offset the Axis of Raceways 3/4"

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4460	1/2"	2.42"	0.59"	0.75"	35	350
MI4461	3/4"	2.42"	0.78"	0.75"	20	200
MI4462	1"	2.58"	1.00"	0.75"	15	150
MI4463	1-1/4"	2.83"	1.32"	0.75"	5	50
MI4464	1-1/2"	2.87"	1.53"	0.75"	5	50
MI4465	2"	3.11"	1.99"	0.75"	3	30
MI4466	2-1/2"	4.13"	2.35"	0.75"	-	18
MI4467	3"	4.47"	2.95"	0.75"	-	15


## Rigid Offset Nipples - Zinc Die Cast



- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure, where space is limited within the box
- Use with a Locknut to provide a Short Raceway between Boxes and enclosures

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4502	1/2"	1.04"	1.00"	100	1,000
MI4503	3/4"	1.34"	1.00"	50	500
MI4504	1"	1.63"	1.00"	25	250


## 1" Long Conduit Speed Nipple - Zinc Die Cast




- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure, where space is limited within the box
- Used with a Locknut to provide a Short Raceway between Boxes and Enclosures

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4480	1/2"	0.64"	0.98"	100	1,000
MI4481	3/4"	0.72"	1.18"	100	1,000
MI4482	1"	0.81"	1.50"	50	500
MI4483	1-1/4"	0.94"	1.77"	25	250
MI4484	1-1/2"	1.07"	2.17"	25	150
MI4485	2"	1.08"	2.60"	15	90
MI4486	2-1/2"	1.09"	3.09"	-	20
MI4487	3"	1.25"	3.71"	-	20
MI4488	3-1/2"	1.27"	4.24"	-	10
MI4489	4"	1.27"	4.70"	-	10

## Rigid Nipples - Zinc Die Cast



## Rigid Nipples with Insulated Throat - Zinc



- Use with Rigid Coupling to Terminate Threaded Conduit to a Knockout, Box or Enclosure where space is limited within the box
- Used with a Locknut to provide a Short Raceway between Boxes and Enclosures
- Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4490	1/2"	0.68"	0.98"	100	1,000
MI4491	3/4"	0.82"	1.18"	100	1,000
MI4492	1"	0.85"	1.50"	50	500
MI4493	1-1/4"	1.00"	1.77"	25	250
MI4494	1-1/2"	1.13"	2.17"	25	150
MI4495	2"	1.14"	2.60"	15	90
MI4496	2-1/2"	1.16"	3.09"	-	20
MI4497	3"	1.33"	3.71"	-	20
MI4498	3-1/2"	1.35"	4.24"	-	10
MI4499	4"	1.35"	4.70"	-	10

## Rigid Steel Nipples

- Connect Threaded Rigid Conduit
- Zinc Plated Steel
- Concrete Tight
- Male Hub Thread (NPT)



CAT. NO.	TRADE SIZE	INNER BOX
MI4600	1/2" X CLOSE	25
MI4601	1/2" X 1-1/2"	25
MI4602	1/2" X 2"	25
MI4605	1/2" X 2-1/2"	25
MI4603	1/2" X 3"	25
MI4606	1/2" X 3-1/2"	25
MI4604	1/2" X 4"	25
MI4607	1/2" X 5"	25
MI4608	1/2" X 6"	25
MI4609	1/2" X 8"	25
MI5600	1/2" X 10"	25
MI5601	1/2" X 12"	25
MI4610	3/4" X CLOSE	25
MI4611	3/4" X 1-1/2"	25
MI4612	3/4" X 2"	25
MI5602	3/4" X 2-1/2"	25
MI4613	3/4" X 3"	25
MI5603	3/4" X 3-1/2"	25
MI4614	3/4" X 4"	25
MI5604	3/4" X 5"	25
MI5605	3/4" X 6"	25
MI5606	3/4" X 8"	25
MI5607	3/4" X 10"	25
MI5608	3/4" X 12"	25
MI4615	1" X CLOSE	25
MI4616	1" X 2"	25
MI4617	1" X 2-1/2"	25
MI4618	1" X 3"	25
MI5610	1" X 3-1/2"	25
MI4619	1" X 4"	25
MI5611	1" X 5"	25
MI5612	1" X 6"	25
MI5615	1" X 12"	25
MI5613	1" X 8"	25
MI5614	1" X 10"	25
MI4647	1-1/4" X CLOSE	25
MI4648	1-1/4" X 2"	25
MI4635	1-1/4" X 3"	25
MI4636	1-1/4" X 4"	25
MI4637	1-1/4" X 6"	25
MI5627	1-1/4" X 12"	30
MI4638	1-1/2" X CLOSE	25
MI4639	1-1/2" X 2"	25
MI5630	1-1/2" X 2-1/2"	25

CAT. NO.	TRADE SIZE	INNER BOX
MI4640	1-1/2" X 3"	25
MI5631	1-1/2" X 3-1/2"	25
MI4641	1-1/2" X 4"	25
MI5632	1-1/2" X 5"	25
MI4650	1-1/2" X 6"	25
MI5636	1-1/2" X 12"	20
MI4642	2" X CLOSE	25
MI4643	2" X 3"	25
MI4644	2" X 4"	25
MI4645	2" X 5"	25
MI4646	2" X 6"	25
MI5643	2" X 8"	20
MI5644	2" X 10"	20
MI5645	2" X 12"	15
MI5650	2-1/2" X CLOSE	40
MI5651	2-1/2" X 3"	40
MI5653	2-1/2" X 4"	30
MI5655	2-1/2" X 6"	20
MI5656	2-1/2" X 8"	10
MI5657	2-1/2" X 10"	10
MI5658	2-1/2" X 12"	10
MI4655	3" X CLOSE	10
MI4656	3" X 3"	10
MI4657	3" X 4"	10
MI4658	3" X 5"	10
MI4659	3" X 6"	10
MI5661	3" X 8"	7
MI5662	3" X 10"	5
MI5663	3" X 12"	5
MI5670	3-1/2" X CLOSE	5
MI5671	3-1/2" X 4"	10
MI5672	3-1/2" X 5"	8
MI5673	3-1/2" X 6"	8
MI5674	3-1/2" X 8"	4
MI5675	3-1/2" X 10"	4
MI5676	3-1/2" X 12"	4
MI4691	4" X CLOSE	20
MI4693	4" X 4"	6
MI4695	4" X 5"	5
MI4697	4" X 6"	5
MI5680	4" X 8"	4
MI5681	4" X 10"	4
MI5682	4" X 12"	4

- Used with a locknut to terminate threaded Rigid and IMC conduit to a box or enclosure
- Bushings rounded surface prevents damage to wire insulation during pulling

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4530	1/2"	1.06"	0.41"	140	1400
MI4531	3/4"	1.28"	0.41"	100	1,000
MI4532	1"	1.54"	0.50"	50	500
MI4533	1-1/4"	1.89"	0.54"	30	300
MI4534	1-1/2"	2.12"	0.62"	20	200
MI4535	2"	2.64"	0.51"	15	150
MI4536	2-1/2"	3.23"	0.62"	-	75
MI4537	3"	3.82"	0.83"	-	65
MI4539	4"	4.84"	3.95"	-	40

## Conduit Bushings - Zinc Die Cast



- Used with a locknut to terminate threaded Rigid and IMC conduit to a box or enclosure
- Bushings rounded surface prevents damage to wire insulation during pulling
- Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4540	1/2"	1.06"	0.41"	140	1400
MI4541	3/4"	1.28"	0.41"	100	1,000
MI4542	1"	1.54"	0.50"	50	500
MI4543	1-1/4"	1.89"	0.54"	30	300
MI4544	1-1/2"	2.12"	0.62"	20	200
MI4545	2"	2.64"	0.51"	15	150
MI4546	2-1/2"	3.23"	0.62"	-	75
MI4547	3"	3.82"	0.83"	-	65
MI4548	3-1/2"	4.95"	0.85"	-	50
MI4549	4"	4.84"	3.91"	-	40


## Conduit Bushings with Insulated Throat - Zinc Die Cast



- Used with a locknut to terminate threaded Rigid & IMC conduit to a box or enclosure and to provide a smooth pulling surface
- Thermoplastic liner prevents damage to wire insulation
- Lug provides for bonding jumper to a neutral bus bar
- Resists corrosion, chemicals, and temperature extremes
- Set-screw provided with each fitting locks bushing in any desired position

## Grounding Bushing Insulated Throat with Aluminum Lug - Zinc

CAT. NO.	TRADE SIZE	GROUNDING LUG RANGE	DIMENSIONS			INNER BOX	OUTER BOX
			A	B	C		
MI4570	1/2"	#14 - #4	1.04"	0.56"	0.43"	50	500
MI4571	3/4"	#14 - #4	1.26"	0.75"	0.49"	40	400
MI4572	1"	#14 - #4	1.56"	0.97"	0.55"	25	250
MI4574	1-1/4"	#14 - #4	1.95"	1.30"	0.60"	25	250
MI4576	1-1/2"	#14 - #2	2.14"	1.48"	0.65"	25	250
MI4578	2"	#14 - #2	2.65"	1.81"	0.68"	10	100
MI4579	2-1/2"	#14 - #1/0	3.19"	2.30"	0.79"	5	50
MI4581	3"	#14 - #1/0	3.82"	2.83"	0.87"	5	50
MI4583	3-1/2"	#14 - #2/0	4.28"	3.35"	0.87"	4	40
MI4585	4"	#14 - #2/0	4.86"	3.78"	0.91"	4	40

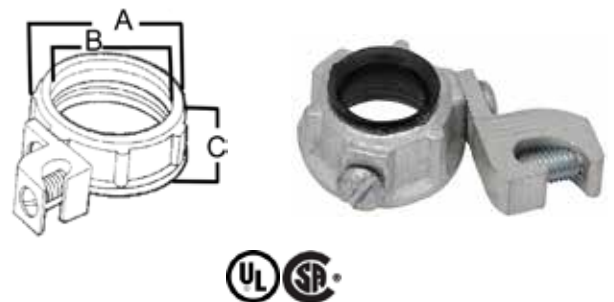


## Thermoplastic Conduit Bushings



- Use to Protect Conductors in Rigid or IMC Conduit from Abrasion/Damage during Pull
- Rounded surface of bushing prevents damage to wire insulation
- Thermoplastic material-heat, impact & torque resistant

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M21732	1/2"	1.06"	0.43"	100	1,000
M21733	3/4"	1.31"	0.43"	100	1,000
M21734	1"	1.59"	0.48"	50	500
M21735	1-1/4"	1.96"	0.56"	25	250
M21736	1-1/2"	2.18"	0.56"	25	250
M21737	2"	2.68"	0.59"	20	200
M21738	2-1/2"	3.25"	0.72"	-	50
M21739	3"	3.87"	0.75"	-	25
M21740	3-1/2"	4.37"	0.77"	-	25
M21741	4"	5.00"	0.77"	-	10

## Malleable Reducing Bushings

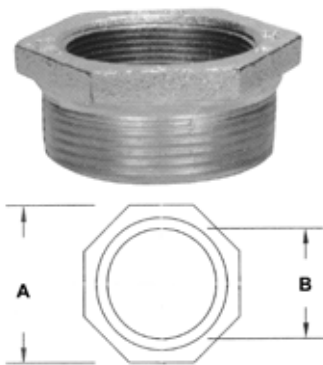


- Reduce the trade size of a tapered entry on a conduit fitting
- Threaded for rigid and IMC condulets, Hex Shoulder
- Rolled edge protects wire insulation

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M14700	2-1/2" X 1"	2.83"	1.22"	-	10
M14701	2-1/2" X 1-1/4"	2.83"	1.58"	-	10
M14702	2-1/2" X 1-1/2"	2.83"	1.83"	-	10
M14703	2-1/2" X 2"	2.83"	2.28"	-	10
M14704	3-1/2" X 1-1/2"	3.45"	1.83"	-	10
M14705	3-1/2" X 2"	3.45"	2.28"	-	10
M14706	3-1/2" X 2-1/2"	3.96"	2.70"	-	10
M14707	3-1/2" X 3"	3.96"	3.35"	-	10
M14708	4" X 2-1/2"	4.45"	2.70"	-	10
M14709	4" X 3-1/2"	4.45"	4.10"	-	10

## Steel Reducing Bushings

- Reduce trade size of tapered entry on a conduit fitting
- Threaded for Rigid Conduit & IMC
- Rolled edge protects wire insulation

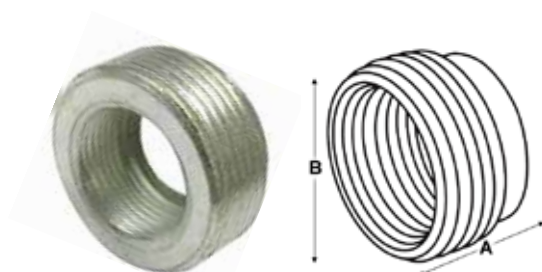

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M14660	1/2" X 3/8"	0.63"	0.91"	100	1,000
M14661	3/4" X 1/2"	0.65"	1.02"	100	1,000
M14662	1" X 1/2"	0.72"	1.27"	50	500
M14663	1" X 3/4"	0.72"	1.27"	50	500
M14664	1-1/4" X 1/2"	0.82"	1.62"	10	100
M14665	1-1/4" X 3/4"	0.82"	1.62"	25	250
M14666	1-1/4" X 1"	0.81"	1.62"	25	250
M14667	1-1/2" X 1/2"	0.85"	1.85"	25	100
M14668	1-1/2" X 3/4"	0.85"	1.85"	25	100
M14669	1-1/2" X 1"	0.85"	1.85"	25	100
M14670	1-1/2" X 1-1/4"	0.85"	1.85"	25	250
M14671	2" X 1/2"	0.97"	2.23"	10	40
M14672	2" X 3/4"	0.97"	2.23"	10	40
M14673	2" X 1"	0.97"	2.23"	10	40
M14674	2" X 1-1/4"	0.97"	2.23"	10	100
M14675	2" X 1-1/2"	0.97"	2.23"	10	100
M14678	3" X 1"	1.57"	3.43"	-	10
M14679	3" X 1-1/4"	1.57"	3.43"	-	10
M14680	3" X 1-1/2"	1.57"	3.43"	-	10
M14681	3" X 2"	1.57"	3.43"	-	10
M14682	3" X 2-1/2"	1.57"	3.43"	-	5
M14688	4" X 2"	1.68"	4.43"	-	5
M14689	4" X 3"	1.68"	4.43"	-	5




## EMT Set Screw Connectors - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4850	1/2"	1.16"	0.93"	50	500
MI4851	3/4"	1.38"	1.17"	25	250
MI4852	1"	1.50"	1.42"	25	200
MI4853	1-1/4"	1.97"	1.82"	10	100
MI4854	1-1/2"	2.26"	2.07"	10	60
MI4855	2"	2.56"	2.52"	5	40
M 14856*	2-1/2"	3.09"	3.30"	-	12
M 14857*	3"	3.37"	3.91"	-	12
M 14858*	3-1/2"	3.52"	3.43"	-	6
M 14859*	4"	3.76"	4.88"	-	6

\* Also UL Listed for use with Rigid & IMC  
Uses 2 Set Screws

- Use to connect EMT Conduit to Steel Outlet Box, Load Center, or other Metal Enclosures
- Concrete Tight (When Taped)
- Die-Cast Zinc, Male hub threads NPS
- Pre-Set/Pre-Staked Combo Head Set-Screws
- UL Listed for EMT Conduit




## EMT Set Screw Connectors - Insulated Throat - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4860	1/2"	1.14"	0.72"	0.59"	50	500
MI4861	3/4"	1.33"	0.94"	0.78"	25	250
MI4862	1"	1.54"	1.18"	1.00"	25	200
MI4863	1-1/4"	1.99"	1.53"	1.32"	10	100
MI4864	1-1/2"	2.13"	1.76"	1.53"	10	60
MI4865	2"	2.44"	2.22"	1.99"	5	40
MI4866*	2-1/2"	3.03"	2.92"	2.34"	-	12
MI4867*	3"	3.22"	3.55"	2.88"	-	12
MI4868*	3-1/2"	3.58"	4.05"	3.31"	-	6
MI4869*	4"	3.72"	4.55"	3.86"	-	6

\* Also UL Listed for use with Rigid & IMC  
Uses 2 Set Screws

- Use to connect EMT Conduit to Steel Outlet Box, Load Center, or other Metal Enclosures
- Insulated Throat
- Concrete Tight (When Taped)
- Die-Cast Zinc, Male hub threads NPS
- Pre-Set/Pre-Staked Combo Head Set-Screws
- UL Listed for EMT Conduit




## EMT Set Screw Couplings - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4870	1/2"	1.49"	0.91"	50	500
MI4871	3/4"	1.94"	1.18"	25	250
MI4872	1"	2.28"	1.41"	20	200
MI4873	1-1/4"	2.62"	1.82"	10	100
MI4874	1-1/2"	2.91"	2.04"	10	60
MI4875	2"	3.48"	2.52"	5	20
MI4876*	2-1/2"	4.01"	3.30"	-	12
MI4877*	3"	4.46"	3.91"	-	12
MI4878*	3-1/2"	4.88"	4.05"	-	6
MI4879*	4"	5.25"	4.91"	-	6


\* Also UL Listed for use with Rigid & IMC  
Uses 2 Set Screws

- Use to connect EMT Conduit to EMT Conduit
- Concrete Tight (When Taped)
- Die-Cast Zinc
- Pre-set/Pre-staked Combo Head Set-screws
- UL Listed for EMT Conduit



## EMT Set Screw Connectors - Steel

- Male NPSM hub threads
- Concrete Tight (When Taped)
- UL Listed for EMT Conduit
- Use to Connect EMT Conduit to Steel Box, Load Center, or other Metal Enclosures
- Heavy Steel Walls
- Pre-Set/Pre-Staked Combo Head Set-Screws




CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4880	1/2"	0.84"	1.47"	50	500
MI4881	3/4"	1.06"	1.57"	25	250
MI4882	1"	1.32"	1.86"	20	200
MI4883	1-1/4"	1.68"	2.24"	-	25
MI4884	1-1/2"	1.91"	2.24"	-	25
MI4885	2"	2.37"	2.35"	-	20
MI4886*	2-1/2"	3.14"	2.89"	-	12
MI4887*	3"	3.77"	2.95"	-	12
MI4888*	3-1/2"	4.28"	3.23"	-	6
MI4889*	4"	4.78"	3.33"	-	6

\* Also for use with Rigid & IMC  
Uses 2 Set Screws

## EMT Set Screw Connectors - Insulated Throat - Steel

- Pre-Set/Pre-Staked Combo Head Set-Screws
- Male NPSM hub threads
- Concrete Tight (When Taped)
- UL Listed for EMT Conduit
- Use to Connect EMT Conduit to Steel Box, Load Center, or other Metal Enclosures
- Insulated Throat
- Heavy Steel Walls




CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4890	1/2"	0.84"	1.51"	50	500
MI4891	3/4"	1.06"	1.61"	25	250
MI4892	1"	1.32"	1.90"	20	200
MI4893	1-1/4"	1.68"	2.28"	-	25
MI4894	1-1/2"	1.91"	2.28"	-	25
MI4895	2"	2.37"	2.40"	-	20
MI4896*	2-1/2"	3.14"	2.95"	-	12
MI4897*	3"	3.77"	3.02"	-	12
MI4898*	3-1/2"	4.28"	3.29"	-	6
MI4899*	4"	4.78"	3.39"	-	6

\* Also for use with Rigid & IMC  
Uses 2 Set Screws

## EMT Set Screw Couplings - Steel

- Concrete Tight (When Taped)
- UL Listed for EMT Conduit
- Use to Join Two Lengths of EMT Conduit together
- Heavy Steel Walls
- Pre-Set/Pre-Staked Combo Head Set-Screws



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4900	1/2"	0.84"	1.59"	50	500
MI4901	3/4"	1.06"	1.80"	25	250
MI4902	1"	1.32"	2.04"	10	100
MI4903	1-1/4"	1.68"	2.76"	-	25
MI4904	1-1/2"	1.91"	2.97"	-	25
MI4905	2"	2.37"	3.22"	-	20
MI4906*	2-1/2"	3.14"	3.86"	-	12
MI4907*	3"	3.77"	4.23"	-	12
MI4908*	3-1/2"	4.28"	4.48"	-	6
MI4909*	4"	4.78"	4.72"	-	6

\* Also for use with Rigid & IMC  
Uses 2 Set Screws




## EMT Compression Connectors - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4910	1/2"	1.26"	0.97"	50	500
MI4911	3/4"	1.21"	1.26"	25	250
MI4912	1"	1.58"	1.52"	15	150
MI4913	1-1/4"	1.62"	1.91"	10	100
MI4914	1-1/2"	1.87"	2.28"	10	40
MI4915	2"	2.146"	2.61"	5	20
MI4916*	2-1/2"	2.54"	3.37"	-	12
MI4917*	3"	2.54"	3.94"	-	12
MI4919*	4"	2.60"	1.94"	-	6

\* Also UL Listed for use with Rigid & IMC

- To secure and terminate EMT to knockouts in concrete tight box, dry or damp location applications
- Male NPSM hub threads
- Concrete tight
- UL Listed for EMT Conduit




## EMT Compression Connectors - Insulated Throat - Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4920	1/2"	1.32"	0.97"	0.59"	50	500
MI4921	3/4"	1.27"	1.26"	0.78"	25	250
MI4922	1"	1.64"	1.52"	1.00"	15	150
MI4923	1-1/4"	1.70"	1.91"	1.32"	10	100
MI4924	1-1/2"	1.95"	2.28"	1.53"	10	40
MI4925	2"	2.23"	2.61"	1.99"	5	20
MI4926*	2-1/2"	2.62"	3.37"	2.35"	-	12
MI4927*	3"	2.62"	3.94"	2.95"	-	12
MI4928*	3-1/2"	2.68"	4.45"	3.43"	-	6
MI4929*	4"	2.68"	4.94"	3.91"	-	6

\* Also UL Listed for use with Rigid & IMC

- To secure and terminate EMT to knockouts in concrete tight box, dry or damp location application
- Male NPSM hub threads
- Concrete tight
- UL Listed for EMT Conduit




## EMT Compression Couplings - Zinc Die Cast


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4930	1/2"	1.53"	0.97"	50	500
MI4931	3/4"	1.58"	1.26"	25	250
MI4932	1"	1.87"	1.52"	15	150
MI4933	1-1/4"	2.25"	1.91"	10	100
MI4934	1-1/2"	3.18"	2.28"	10	50
MI4935	2"	2.44"	2.61"	5	20
MI4936*	2-1/2"	3.15"	3.37"	-	12
MI4937*	3"	3.15"	3.94"	-	12
MI4938*	3-1/2"	3.27"	4.45"	-	6
MI4939*	4"	3.27"	4.94"	-	6

\* Also UL Listed for use with Rigid & IMC

- To join lengths of EMT for concrete tight, dry or damp location applications
- Concrete tight
- UL Listed for EMT Conduit



## Steel EMT Compression Connectors




- Use to connect EMT conduit to steel outlet box, load center, or other metal enclosure
- Heavy Steel Walls, Zinc Plated
- Male hub threads - NPSM
- Concrete tight (When Taped)
- UL Listed for EMT Conduit



CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI4940	1/2"	1.06"	1.37"	1.13"	0.73"	25	250
MI4941	3/4"	1.30"	1.46"	1.38"	0.95"	25	250
MI4942	1"	1.59"	1.58"	1.72"	1.19"	-	75
MI4943	1-1/4"	2.08"	2.05"	2.06"	1.54"	-	25
MI4944	1-1/2"	2.27"	2.13"	2.37"	1.77"	-	20
MI4945	2"	2.72"	2.24"	2.89"	2.22"	-	10
MI4946*	2-1/2"	3.46"	3.27"	3.52"	2.93"	-	8
MI4947*	3"	4.02"	3.50"	4.20"	3.58"	-	4
MI4948*	3-1/2"	4.62"	3.78"	4.79"	4.05"	-	4
MI4949*	4"	5.02"	3.80"	5.32"	4.58"	-	6

## Steel EMT Compression Connectors - Insulated Throat




- Use to connect EMT conduit to steel outlet box, load center or other metal enclosure
- Heavy Steel Walls, Zinc Plated
- Insulated throat
- Male hub threads - NPSM
- Concrete tight (When Taped)
- UL Listed for EMT Conduit



CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI4950	1/2"	1.06"	1.41"	1.13"	0.73"	25	250
MI4951	3/4"	1.30"	1.50"	1.38"	0.95"	25	250
MI4952	1"	1.59"	1.61"	1.72"	1.19"	-	75
MI4953	1-1/4"	2.08"	2.10"	2.06"	1.54"	-	25
MI4954	1-1/2"	2.27"	2.17"	2.37"	1.77"	-	20
MI4955	2"	2.72"	2.29"	2.89"	2.22"	-	15
MI4956*	2-1/2"	3.46"	3.35"	3.52"	2.93"	-	8
MI4957*	3"	4.02"	3.58"	4.20"	3.58"	-	4
MI4958*	3-1/2"	4.62"	3.86"	4.79"	4.05"	-	4
MI4959*	4"	5.02"	3.88"	5.32"	4.58"	-	4

## Steel EMT Compression Couplings



- Use to join to lengths of EMT conduit together
- Heavy Steel Walls, Zinc Plated
- Concrete tight (When Taped)
- UL Listed for EMT Conduit



CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI4960	1/2"	1.72"	1.06"	1.00"	0.73"	25	250
MI4961	3/4"	1.73"	1.30"	1.22"	0.95"	25	250
MI4962	1"	1.91"	1.59"	1.48"	1.19"	10	100
MI4963	1-1/4"	2.53"	2.08"	1.93"	1.54"	-	25
MI4964	1-1/2"	2.62"	2.27"	2.16"	1.77"	-	20
MI4965	2"	2.78"	2.72"	2.57"	2.22"	-	10
MI4966*	2-1/2"	3.94"	3.70"	3.46"	2.93"	-	8
MI4967*	3"	4.17"	4.38"	4.02"	3.58"	-	4
MI4968*	3-1/2"	4.70"	4.68"	4.62"	4.05"	-	4
MI4969*	4"	4.96"	5.40"	5.02"	4.58"	-	6




## Steel EMT Rain Tight Compression Connectors

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4970	1/2"	1.14"	0.51"	1.08"	50	500
MI4971	3/4"	1.42"	0.51"	1.35"	25	250
MI4972	1"	1.58"	0.57"	1.65"	10	100
MI4973	1-1/4"	1.60"	0.61"	2.02"	10	100
MI4974	1-1/2"	1.93"	0.63"	2.24"	10	50
MI4975	2"	2.23"	0.67"	2.80"	5	50
MI4976*	2-1/2"	2.80"	0.83"	3.60"	-	12
MI4977*	3"	3.00"	0.83"	4.25"	-	12
MI4978*	3-1/2"	3.35"	0.83"	4.80"	-	6
MI4979*	4"	3.47"	0.83"	5.24"	-	6

\* Also UL Listed for use with Rigid & IMC

- Use to connect EMT conduit to steel outlet box, load center, or other metal enclosure in a dry or wet location
- Internal Sealing Ring & Knockout Gasket create Raintight Seal
- Heavy Steel Walls, Zinc Plated
- Concrete Tight
- UL Listed for EMT Conduit




## Steel EMT Rain Tight Compression Connectors-Insulated Throat

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI4980	1/2"	1.18"	0.51"	1.08"	50	500
MI4981	3/4"	1.46"	0.51"	1.35"	25	250
MI4982	1"	1.61"	0.57"	1.65"	10	100
MI4983	1-1/4"	1.69"	0.61"	2.02"	10	100
MI4984	1-1/2"	2.00"	0.61"	2.24"	10	50
MI4985	2"	2.36"	0.67"	2.76"	5	50
MI4986*	2-1/2"	2.87"	0.83"	3.62"	-	12
MI4987*	3"	3.07"	0.83"	4.25"	-	12
MI4988*	3-1/2"	3.42"	0.83"	4.80"	-	6
MI4989*	4"	3.54"	0.83"	5.24"	-	6

\* Also UL Listed for use with Rigid & IMC

- Use to connect EMT conduit to steel outlet box, load center, or other metal enclosure in dry or wet location
- Internal Sealing Ring & Knockout Gasket create Raintight Seal
- Heavy Steel Walls, Zinc Plated
- Insulated throat
- Concrete Tight
- UL Listed for EMT Conduit




## Steel EMT Compression Rain Tight Couplings


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4990	1/2"	1.81"	1.08"	50	500
MI4991	3/4"	1.89"	1.35"	25	250
MI4992	1"	2.30"	1.65"	10	100
MI4993	1-1/4"	2.68"	2.02"	10	100
MI4994	1-1/2"	2.74"	2.24"	10	50
MI4995	2"	2.95"	2.76"	5	50
MI4996*	2-1/2"	3.90"	3.62"	-	12
MI4997*	3"	4.11"	4.25"	-	12
MI4998*	3-1/2"	4.53"	4.80"	-	6
MI4999*	4"	4.65"	5.24"	-	6

\* Also UL Listed for use with Rigid & IMC

- Use to connect two lengths of EMT conduit together in a dry or wet location
- Internal Sealing Ring creates Rain Tight Seal
- Heavy Steel Walls, Zinc Plated
- Concrete Tight
- UL Listed for EMT Conduit




## EMT To Box Offset Set Screw Connector - Zinc Die Cast



- Use to connect EMT conduit to a Metal Box or Enclosure where Offset is Required
- Zinc Die-Cast
- Combo Head Set-Screw
- Assembled with Zinc Die Cast Locknut
- Concrete Tight (When Taped)

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI5010	1/2"	2.11"	0.37"	20	200
MI5011	3/4"	2.85"	0.75"	10	100
MI5012	1"	3.14"	1.19"	-	100


## EMT To Box Offset Compression Connector - Zinc Die Cast



- Use to connect EMT conduit to a Metal Outlet Box or Enclosure where an Offset is Required
- Zinc Die-Cast
- Compression Style
- Assembled with Zinc Die Cast Locknut
- Concrete Tight (When Taped)

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI5014	1/2"	2.11"	0.37"	20	200
MI5015	3/4"	2.88"	0.75"	10	100

## EMT to EMT Inside Corner Set Screw Pulling Elbows




- Use to Connect EMT Conduit together on a 90° Inside Corner
- Combo Head Set Screws
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5020	1/2"	2.32"	2.32"	0.59"	10	100
MI5021	3/4"	2.64"	2.64"	0.78"	5	50

## *EMT To BOX Set Screw Pulling Elbows - Zinc Die Cast*

- Used to Connect EMT to a Metal Box/Enclosure at a 90° Bend
- Removable Aluminum Cover and Neoprene Gasket facilitates wire pulling
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut
- Combo Head Set Screws


CAT. NO.	TRADE SIZE	DIMENSIONS		OUTER BOX
		A	B	
MI5030	1/2"	1.34"	0.97"	100
MI5031	3/4"	1.40"	1.26"	50
MI5032	1"	1.97"	1.51"	30
MI5033	1-1/4"	2.32"	1.91"	20



## *EMT To EMT Set Screw Pulling Elbows - Zinc Die Cast*

- Used to Connect EMT together at a 90° bend
- Zinc Die Cast
- Removable Aluminum Cover and Neoprene Gasket facilitates wire pulling
- Combo Head Set Screws


CAT. NO.	TRADE SIZE	DIMENSIONS				OUTER BOX
		A	B	C	D	
MI5035	1/2"	1.31"	0.96"	2.56"	1.78"	100
MI5036	3/4"	1.39"	1.23"	2.81"	2.15"	50
MI5037	1"	1.96"	1.51"	3.88"	3.17"	30
MI5038	1-1/4"	2.32"	1.91"	4.62"	3.25"	20



## *EMT/RIGID To EMT/RIGID Combination Pulling Elbow - Zinc*

- Used to facilitate pulling conductors through a sharp bend in a run of EMT, Threaded Rigid or IMC conduit
- Threaded and Set Screw Conduit Entrance
- Removable Aluminum Cover and Neoprene Gasket facilitates wire pulling
- Combo Head Set Screws

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI5044	1/2"	1.31"	0.96"	2.63"	1.78"	200	



## 90° EMT Elbows



- For use with conduit

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	OFFSET B	TANGENT	
MI6001	90°	1/2"	4.00"	6.90"	2.90"	50
MI6002	90°	3/4"	4.50"	7.40"	2.90"	50
MI6003	90°	1"	5.80"	8.70"	3.00"	25
MI6004	90°	1-1/4"	7.30"	10.60"	3.30"	20
MI6005	90°	1-1/2"	8.30"	11.90"	3.60"	15
MI6006	90°	2"	9.50"	13.80"	4.30"	10
MI6007	90°	2-1/2"	10.50"	15.80"	5.30"	156
MI6008	90°	3"	13.00"	18.80"	5.80"	35
MI6009	90°	3-1/2"	15.00"	21.80"	6.80"	35
MI6010	90°	4"	16.00"	23.10"	7.10"	35


## 45° EMT Elbows



- For use with conduit

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS				OUTER BOX
			RADIUS	OFFSET B	OFFSET C	TANGENT	
MI6011	45°	1/2"	4.00"	7.00"	2.90"	1.90"	50
MI6012	45°	3/4"	4.50"	7.40"	3.00"	2.00"	50
MI6013	45°	1"	5.80"	9.50"	4.00"	2.70"	25
MI6014	45°	1-1/4"	7.30"	13.10"	5.40"	4.30"	20
MI6015	45°	1-1/2"	8.30"	14.00"	5.80"	4.30"	15
MI6016	45°	2"	9.50"	16.10"	6.60"	5.40"	10
MI6017	45°	2-1/2"	10.50"	19.00"	7.90"	6.80"	240
MI6018	45°	3"	13.00"	20.50"	8.50"	6.70"	35
MI6019	45°	3-1/2"	15.00"	22.80"	9.50"	7.10"	35
MI6020	45°	4"	16.00"	29.20"	12.10"	10.50"	35

## 22-1/2° EMT Elbows

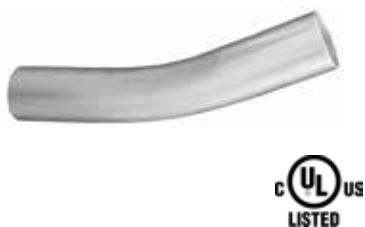

- For use with conduit

CAT. NO.	ORIENTATION	TRADE SIZE	DIMENSIONS			OUTER BOX
			RADIUS	B	TANGENT	
MEMT05022	22-1/2°	1/2"	4"	5-7/8"	1-5/16"	50
MEMT07522	22-1/2°	3/4"	4-1/2"	7"	1-7/16"	50
MEMT10022	22-1/2°	1"	5-3/4"	8-3/4"	1-9/16"	25
MEMT12522	22-1/2°	1-1/4"	7-1/4"	10-1/8"	1-3/4"	20
MEMT15022	22-1/2°	1-1/2"	8-1/4"	11-3/4"	2"	15
MEMT20022	22-1/2°	2"	9-1/2"	14-1/4"	2-5/16"	10
MEMT25022	22-1/2°	2-1/2"	10-1/2"	16-1/4"	2-3/4"	240
MEMT30022	22-1/2°	3"	13"	18-3/4"	3-1/4"	35
MEMT35022	22-1/2°	3-1/2"	15"	21-1/4"	3-11/16"	35
MEMT40022	22-1/2°	4"	16"	23-3/8"	3-15/16"	35

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit


CAT. NO.	TRADE SIZE	DIMENSIONS -T SERIES				BOX QTY
		A	B	C	D	
MI4060	1/2"	4.72"	2.03"	1.36"	0.61"	50
MI4061	3/4"	5.51"	2.30"	1.63"	0.81"	50
MI4062	1"	6.46"	2.68"	1.89"	1.04"	25
MI4063	1-1/4"	8.35"	3.52"	2.50"	1.37"	10
MI4064	1-1/2"	8.35"	3.52"	2.50"	1.60"	10
MI4065	2"	10.55"	4.27"	3.41"	2.06"	10
MI4066	2-1/2"	13.46"	5.89"	3.98"	2.46"	1
MI4067	3"	13.46"	5.89"	4.53"	3.06"	1
MI4068	3-1/2"	16.30"	7.66"	5.60"	3.54"	1
MI4069	4"	16.30"	7.66"	5.60"	4.02"	1
<b>WITH COVER AND GASKET</b>						
MI4070	1/2"	4.72"	2.03"	1.36"	0.61"	50
MI4071	3/4"	5.51"	2.30"	1.63"	0.81"	50
MI4072	1"	6.46"	2.68"	1.89"	1.04"	10
MI4073	1-1/4"	8.35"	3.52"	2.50"	1.37"	10
MI4074	1-1/2"	8.35"	3.52"	2.50"	1.60"	10
MI4075	2"	10.55"	4.27"	3.41"	2.06"	10
MI4076	2-1/2"	13.46"	5.89"	3.98"	2.46"	1
MI4077	3"	13.46"	5.89"	4.53"	3.06"	1
MI4078	3-1/2"	16.30"	7.66"	5.60"	3.54"	1
MI4079	4"	16.30"	7.66"	5.60"	4.02"	1

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES				BOX QTY
		A	B	C	D	
MI4040	1/2"	4.31"	1.34"	2.09"	0.61"	50
MI4041	3/4"	5.08"	1.56"	2.39"	0.81"	50
MI4042	1"	5.92"	1.82"	2.78"	1.04"	25
MI4043	1-1/4"	7.82"	2.51"	3.52"	1.37"	10
MI4044	1-1/2"	7.82"	2.51"	3.52"	1.60"	10
MI4045	2"	10.05"	3.19"	4.51"	2.06"	10
MI4046	2-1/2"	12.83"	4.49"	5.31"	2.46"	1
MI4047	3"	12.83"	4.49"	5.91"	3.06"	1
MI4048	3-1/2"	15.65"	5.55"	7.09"	3.54"	1
MI4049	4"	15.65"	5.55"	7.09"	4.02"	1
<b>WITH COVER AND GASKET</b>						
MI4050	1/2"	4.31"	1.34"	2.09"	0.61"	50
MI4051	3/4"	5.08"	1.56"	2.39"	0.81"	50
MI4052	1"	5.92"	1.82"	2.78"	1.04"	25
MI4053	1-1/4"	7.82"	2.51"	3.52"	1.37"	10
MI4054	1-1/2"	7.82"	2.51"	3.52"	1.60"	10
MI4055	2"	10.05"	3.19"	4.51"	2.06"	10
MI4056	2-1/2"	12.83"	4.49"	5.31"	2.46"	1
MI4057	3"	12.83"	4.49"	5.91"	3.06"	1
MI4058	3-1/2"	15.65"	5.55"	7.09"	3.54"	1
MI4059	4"	15.65"	5.55"	7.09"	4.02"	1


## Aluminum Rigid Conduit Bodies T Type - Threaded

- Tapered Threaded Hubs (NPT)
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

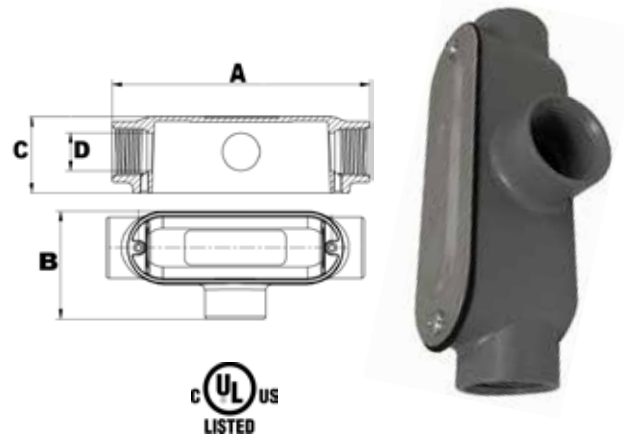


## Aluminum Rigid Conduit Bodies LB Type - Threaded

- Tapered Threaded Hubs (NPT)
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

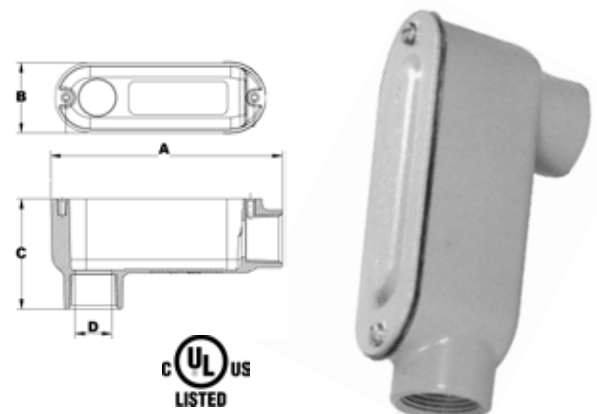

## Aluminum Rigid Conduit Bodies LR Type - Threaded

- Tapered Threaded Hubs (NPT)
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant, Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls




To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES				BOX QTY
		A	B	C	D	
MI4080	1/2"	4.31"	2.03"	1.36"	0.61"	50
MI4081	3/4"	5.08"	2.30"	1.63"	0.81"	50
MI4082	1"	5.92"	2.68"	1.89"	1.04"	25
MI4083	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
MI4084	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
MI4085	2"	10.05"	4.27"	3.41"	2.06"	10
MI4086	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
MI4087	3"	12.83"	5.89"	4.53"	3.06"	1
MI4088	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
MI4089	4"	15.65"	7.66"	5.59"	4.02"	1
<b>WITH COVER AND GASKET</b>						
MI4090	1/2"	4.31"	2.03"	1.36"	0.61"	50
MI4091	3/4"	5.08"	2.30"	1.63"	0.81"	50
MI4092	1"	5.92"	2.68"	1.89"	1.04"	25
MI4093	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
MI4094	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
MI4095	2"	10.05"	4.27"	3.41"	2.06"	10
MI4096	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
MI4097	3"	12.83"	5.89"	4.53"	3.06"	1
MI4098	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
MI4099	4"	15.65"	7.66"	5.59"	4.02"	1

## Aluminum Rigid Conduit Bodies LL Type - Threaded

- Tapered Threaded Hubs (NPT)
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant, Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit


CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES				BOX QTY
		A	B	C	D	
MI4100	1/2"	4.31"	2.03"	1.36"	0.61"	50
MI4101	3/4"	5.08"	2.30"	1.63"	0.81"	50
MI4102	1"	5.92"	2.68"	1.89"	1.04"	25
MI4103	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
MI4104	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
MI4105	2"	10.05"	4.27"	3.41"	2.06"	10
MI4106	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
MI4107	3"	12.83"	5.89"	4.53"	3.06"	1
MI4108	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
MI4109	4"	15.65"	7.66"	5.59"	4.02"	1
<b>WITH COVER AND GASKET</b>						
MI4110	1/2"	4.31"	2.03"	1.36"	0.61"	50
MI4111	3/4"	5.08"	2.30"	1.63"	0.81"	50
MI4112	1"	5.92"	2.68"	1.89"	1.04"	25
MI4113	1-1/4"	7.82"	3.52"	2.50"	1.37"	10
MI4114	1-1/2"	7.82"	3.52"	2.50"	1.60"	10
MI4115	2"	10.05"	4.27"	3.41"	2.06"	10
MI4116	2-1/2"	12.83"	5.89"	3.98"	2.46"	1
MI4117	3"	12.83"	5.89"	4.53"	3.06"	1
MI4118	3-1/2"	15.65"	7.66"	5.59"	3.54"	1
MI4119	4"	15.65"	7.66"	5.59"	4.02"	1

## Aluminum Rigid Conduit Bodies C Type-Threaded

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit


CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES				BOX QTY
		A	B	C	D	
MI4I20	1/2"	4.72"	1.34"	1.36"	0.61"	50
MI4I21	3/4"	5.51"	1.56"	1.63"	0.81"	50
MI4I22	1"	6.46"	1.82"	1.89"	1.04"	25
MI4I23	1-1/4"	8.35"	2.51"	2.50"	1.37"	10
MI4I24	1-1/2"	8.35"	2.51"	2.50"	1.60"	10
MI4I25	2"	10.55"	3.19"	3.41"	2.06"	10
MI4I26	2-1/2"	13.46"	4.49"	3.98"	2.46"	1
MI4I27	3"	13.46"	4.49"	4.53"	3.06"	1
MI4I28	3-1/2"	16.30"	5.55"	5.59"	3.54"	1
MI4I29	4"	16.30"	5.55"	5.59"	4.02"	1
<b>WITH COVER AND GASKET</b>						
MI4I30	1/2"	4.72"	1.34"	1.36"	0.61"	50
MI4I31	3/4"	5.51"	1.56"	1.63"	0.81"	50
MI4I32	1"	6.46"	1.82"	1.89"	1.04"	10
MI4I33	1-1/4"	8.35"	2.51"	2.50"	1.37"	10
MI4I34	1-1/2"	8.35"	2.51"	2.50"	1.60"	10
MI4I35	2"	10.55"	3.19"	3.41"	2.06"	10
MI4I36	2-1/2"	13.46"	4.49"	3.98"	2.46"	1
MI4I37	3"	13.46"	4.49"	4.53"	3.06"	1
MI4I38	3-1/2"	16.30"	5.55"	5.59"	3.54"	1
MI4I39	4"	16.30"	5.55"	5.59"	4.02"	1

- Tapered Threaded Hubs (NPT)
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant, Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

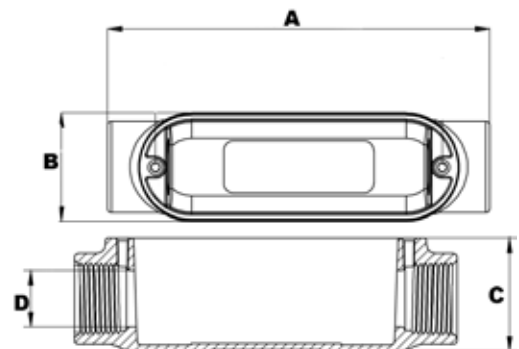

## Aluminum Mogul Conduit Body with Cover & Gasket


- Larger body size facilitates pulling of large and heavy conductors
- Specially designed raised cast covers provide additional wiring area
- Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices
- Smooth, rounded integral bushing in each hub protects conductor insulation
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity
- Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws
- Includes cellulose/rubber Flex Sealing Gasket
- Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit

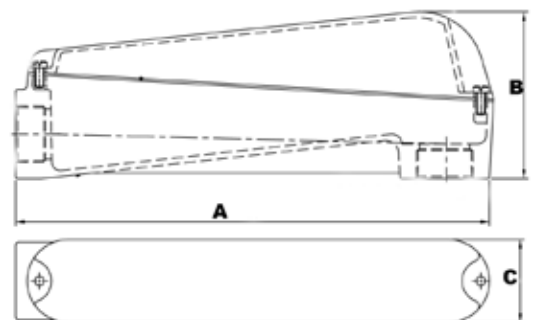

**WITH COVER & GASKET**

CAT. NO.	TRADE SIZE	DIMENSIONS			WIRE SIZE	BOX QTY
		A	B	C		
MI4302	2"	14.53"	5.41"	3.13"	3 #300 MCM	1

## Aluminum EMT Set Screw Conduit Bodies T Type

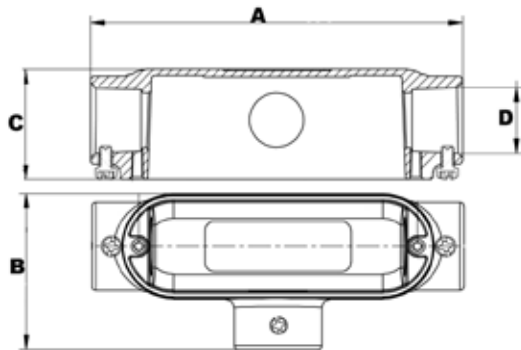


**To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit**

- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-T SERIES				BOX QTY
		A	B	C	D	
MI4160	1/2"	4.75"	2.03"	1.36"	0.72"	50
MI4161	3/4"	5.51"	2.30"	1.63"	0.96"	50
MI4162	1"	6.46"	2.68"	1.89"	1.18"	25
MI4163	1-1/4"	8.35"	3.52"	2.50"	1.53"	10
MI4164	1-1/2"	8.36"	3.52"	2.50"	1.76"	10
MI4165	2"	10.55"	4.27"	3.41"	2.21"	10
<b>WITH COVER AND GASKET</b>						
MI4170	1/2"	4.75"	2.03"	1.36"	0.72"	50
MI4171	3/4"	5.51"	2.30"	1.63"	0.96"	50
MI4172	1"	6.46"	2.68"	1.89"	1.18"	25
MI4173	1-1/4"	8.35"	3.52"	2.50"	1.53"	10
MI4174	1-1/2"	8.36"	3.52"	2.50"	1.76"	10
MI4175	2"	10.55"	4.27"	3.41"	2.21"	10

## Aluminum EMT Set Screw Conduit Bodies LB Type

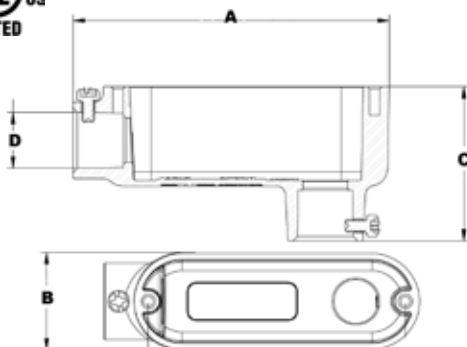

**To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit**

- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES				BOX QTY
		A	B	C	D	
MI4140	1/2"	4.31"	1.34"	2.09"	0.72"	50
MI4141	3/4"	5.08"	1.56"	2.39"	0.96"	50
MI4142	1"	5.92"	1.82"	2.78"	1.18"	25
MI4143	1-1/4"	7.82"	2.51"	3.52"	1.53"	10
MI4144	1-1/2"	7.82"	2.51"	3.52"	1.76"	10
MI4145	2"	10.05"	3.19"	4.51"	2.21"	10
<b>WITH COVER AND GASKET</b>						
MI4150	1/2"	4.31"	1.34"	2.09"	0.72"	50
MI4151	3/4"	5.08"	1.56"	2.39"	0.96"	50
MI4152	1"	5.92"	1.82"	2.78"	1.18"	25
MI4153	1-1/4"	7.82"	2.51"	3.52"	1.53"	10
MI4154	1-1/2"	7.82"	2.51"	3.52"	1.76"	10
MI4155	2"	10.05"	3.19"	4.51"	2.21"	10


## Aluminum EMT Set Screw Conduit Bodies LR Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls



CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES				BOX QTY
		A	B	C	D	
MI4180	1/2"	4.31"	2.03"	1.36"	0.72"	50
MI4181	3/4"	5.08"	2.30"	1.63"	0.96"	50
MI4182	1"	5.92"	2.68"	1.89"	1.18"	25
MI4183	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
MI4184	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
MI4185	2"	10.05"	4.27"	3.41"	2.21"	10
<b>WITH COVER AND GASKET</b>						
MI4190	1/2"	4.31"	2.03"	1.36"	0.72"	50
MI4191	3/4"	5.08"	2.30"	1.63"	0.96"	50
MI4192	1"	5.92"	2.68"	1.89"	1.18"	25
MI4193	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
MI4194	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
MI4195	2"	10.05"	4.27"	3.41"	2.21"	10

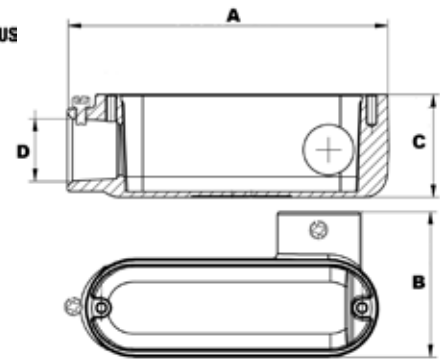


## Aluminum EMT Set Screw Conduit Bodies LL Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit


- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls



CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES				BOX QTY
		A	B	C	D	
MI4200	1/2"	4.31"	2.03"	1.36"	0.72"	50
MI4201	3/4"	5.08"	2.30"	1.63"	0.96"	50
MI4202	1"	5.92"	2.68"	1.89"	1.18"	25
MI4203	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
MI4204	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
MI4205	2"	10.05"	4.27"	3.41"	2.21"	10
<b>WITH COVER AND GASKET</b>						
MI4210	1/2"	4.31"	2.03"	1.36"	0.72"	50
MI4211	3/4"	5.08"	2.30"	1.63"	0.96"	50
MI4212	1"	5.92"	2.68"	1.89"	1.18"	25
MI4213	1-1/4"	7.82"	3.52"	2.50"	1.52"	10
MI4214	1-1/2"	7.82"	3.52"	2.50"	1.76"	10
MI4215	2"	10.05"	4.27"	3.41"	2.21"	10

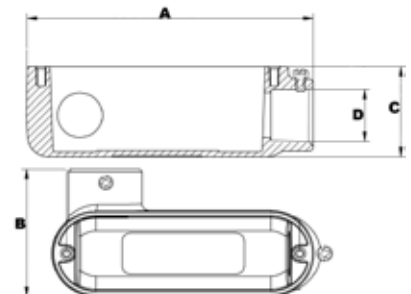

## Aluminum EMT Set Screw Conduit Bodies Type C

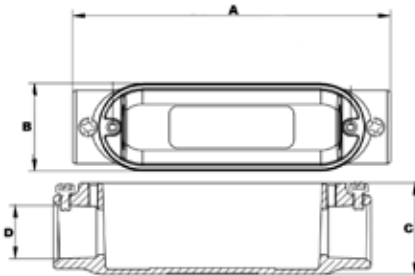

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For EMT Conduit

- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES				BOX QTY
		A	B	C	D	
MI4220	1/2"	4.72"	1.34"	1.36"	0.72"	50
MI4221	3/4"	5.51"	1.56"	1.63"	0.96"	50
MI4222	1"	6.46"	1.82"	1.89"	1.18"	25
MI4223	1-1/4"	8.35"	2.51"	2.50"	1.52"	10
MI4224	1-1/2"	8.35"	2.51"	2.50"	1.76"	10
MI4225	2"	10.55"	3.19"	3.41"	2.21"	10
<b>WITH COVER AND GASKET</b>						
MI4230	1/2"	4.72"	1.34"	1.36"	0.72"	50
MI4231	3/4"	5.51"	1.56"	1.63"	0.96"	50
MI4232	1"	6.46"	1.82"	1.89"	1.18"	25
MI4233	1-1/4"	8.35"	2.51"	2.50"	1.52"	10
MI4234	1-1/2"	8.35"	2.51"	2.50"	1.76"	10
MI4235	2"	10.55"	3.19"	3.41"	2.21"	10

Trade Size in Inches		Wire Size (THWN, THHN) Conductor Size AWG/kcmil																					
		14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500	600	700	750	
1/2	EMT	12	9	5	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	IMC	14	10	6	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	GALV	13	9	6	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
3/4	EMT	22	16	10	6	4	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	IMC	24	17	11	6	4	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	GALV	22	16	10	6	4	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	EMT	35	26	16	9	7	4	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	IMC	39	29	18	10	7	4	4	3	2	1	1	1	1	1	1	1	1	1	1	1	1	1
	GALV	36	26	17	9	7	4	3	3	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1 1/4	EMT	61	45	28	16	12	7	6	5	4	3	2	1	1	1	1	1	1	1	1	1	1	1
	IMC	68	49	31	18	13	8	6	5	4	3	2	1	1	1	1	1	1	1	1	1	1	1
	GALV	63	46	29	16	12	7	6	5	4	3	2	1	1	1	1	1	1	1	1	1	1	1
1 1/2	EMT	84	61	38	22	16	10	8	7	5	4	3	2	1	1	1	1	1	1	1	1	1	1
	IMC	91	67	42	24	17	10	9	7	5	4	3	2	1	1	1	1	1	1	1	1	1	1
	GALV	85	62	39	22	16	10	8	7	5	4	3	2	1	1	1	1	1	1	1	1	1	1
Trade Size in Inches		Wire Size (THWN, THHN) Conductor Size AWG/kcmil																					
		14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	350	400	500	600	700	750	
2	EMT	138	101	63	36	26	16	13	11	8	7	6	5	4	3	2	1	1	1	1	1	1	1
	IMC	149	109	68	39	38	17	15	12	9	8	6	5	4	3	3	2	2	1	1	1	1	1
	GALV	140	102	64	37	27	16	14	11	8	7	6	5	4	3	3	2	2	1	1	1	1	1
2 1/2	EMT	241	176	111	64	46	28	24	20	15	12	10	8	7	6	5	4	4	3	2	2	1	1
	IMC	211	154	97	56	40	25	21	17	13	11	9	7	6	5	4	4	3	3	2	1	1	1
	GALV	200	146	92	53	38	23	20	17	12	10	8	7	6	5	4	3	3	2	1	1	1	1
3	EMT	364	226	167	96	69	43	36	30	22	19	16	13	11	9	7	6	6	5	4	3	3	3
	IMC	362	238	150	86	62	38	32	27	20	17	14	12	9	8	7	6	5	4	3	3	3	3
	GALV	309	225	142	82	59	36	31	26	19	16	13	11	9	7	6	5	5	4	3	3	3	3
3 1/2	EMT	476	347	219	126	91	56	47	40	29	25	20	17	14	11	10	9	8	6	5	4	4	4
	IMC	436	318	200	115	83	51	43	36	27	23	19	16	13	10	9	8	7	6	5	4	4	4
	GALV	412	301	189	109	79	48	41	34	25	21	18	15	12	10	8	7	7	5	4	4	4	4
4	EMT	608	443	279	161	116	71	60	51	37	32	26	22	18	15	13	11	10	8	7	6	5	5
	IMC	562	410	258	149	107	66	56	47	35	29	24	20	17	13	12	10	9	7	6	5	5	5
	GALV	531	387	244	140	101	62	53	44	33	27	23	19	16	13	11	10	8	7	6	5	5	5

Above information referenced from tables C1, C4, and C8 in the National Electric Code of 2008.  
 For more information on the following types of conduit, please see the table listed below in the appendix C of the National Electric Code of 2008.  
 Rigid PVC Conduit, Schedule 80 -- Table C9  
 Rigid PVC Conduit, Schedule 40 -- Table C10  
 Flexible Metallic Conduit -- Table C3  
 Liquidtight Flexible Metallic Conduit -- Table C7  
 Liquidtight Flexible Nonmetallic Conduit (Type FMC-B) -- Table C5  
 If you have any other questions see the NEC Code Book


## Aluminum Combination Conduit Bodies T Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls



CAT. NO.	TRADE SIZE	DIMENSIONS-T SERIES			BOX QTY
		A	B	C	
MI4252	1/2"	4.72"	1.36"	2.03"	50
MI4253	3/4"	5.51"	1.63"	2.30"	50
MI4254	1"	6.46"	1.89"	2.68"	25
MI4255	1-1/4"	8.35"	2.50"	3.52"	10
MI4256	1-1/2"	8.35"	2.50"	3.52"	10
MI4257	2"	10.55"	3.41"	4.27"	10
<b>WITH COVER AND GASKET</b>					
MI4258	1/2"	4.72"	1.36"	2.03"	50
MI4259	3/4"	5.51"	1.63"	2.30"	50
MI4260	1"	6.46"	1.89"	2.68"	25
MI4261	1-1/4"	8.35"	2.50"	3.52"	10
MI4262	1-1/2"	8.35"	2.50"	3.52"	10
MI4263	2"	10.55"	3.41"	4.27"	10

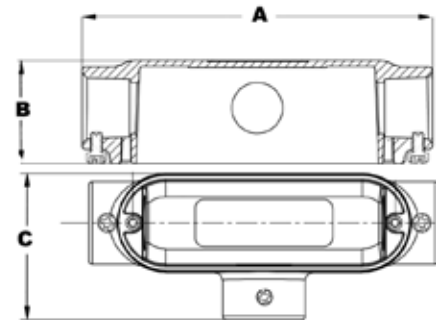


## Aluminum Combination Conduit Bodies LB Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit


- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls



CAT. NO.	TRADE SIZE	DIMENSIONS-LB SERIES			BOX QTY
		A	B	C	
MI4240	1/2"	4.31"	1.34"	2.09"	50
MI4241	3/4"	5.08"	1.56"	2.39"	50
MI4242	1"	5.92"	1.82"	2.78"	25
MI4243	1-1/4"	7.82"	2.51"	3.52"	10
MI4244	1-1/2"	7.82"	2.51"	3.52"	10
MI4245	2"	10.05"	3.19"	4.51"	10
<b>WITH COVER AND GASKET</b>					
MI4246	1/2"	4.31"	1.34"	2.09"	50
MI4247	3/4"	5.08"	1.56"	2.39"	50
MI4248	1"	5.92"	1.82"	2.78"	25
MI4249	1-1/4"	7.82"	2.51"	3.52"	10
MI4250	1-1/2"	7.82"	2.51"	3.52"	10
MI4251	2"	10.05"	3.19"	4.51"	10

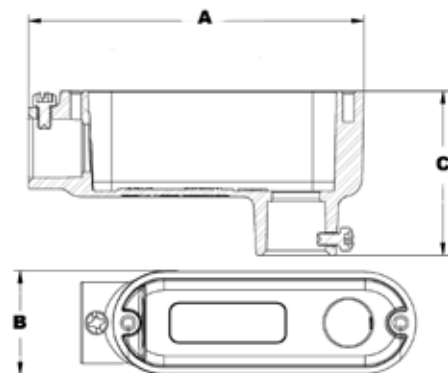

## Aluminum Combination Conduit Bodies LR Type

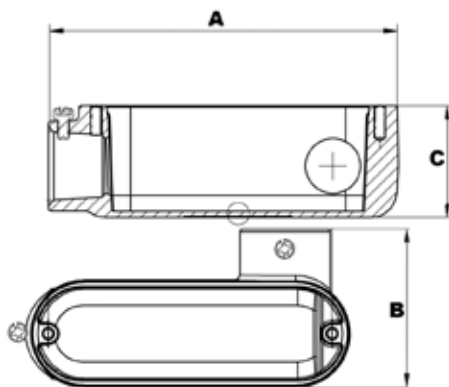


To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES			BOX QTY
		A	B	C	
MI4264	1/2"	4.31"	2.03"	1.36"	50
MI4265	3/4"	5.08"	2.30"	1.63"	50
MI4266	1"	5.92"	2.68"	1.89"	25
MI4267	1-1/4"	7.82"	3.52"	2.50"	10
MI4268	1-1/2"	7.82"	3.52"	2.50"	10
MI4269	2"	10.05"	4.27"	3.41"	10
<b>WITH COVER AND GASKET</b>					
MI4270	1/2"	4.31"	2.03"	1.36"	50
MI4271	3/4"	5.08"	2.30"	1.63"	50
MI4272	1"	5.92"	2.68"	1.89"	25
MI4273	1-1/4"	7.82"	3.52"	2.50"	10
MI4274	1-1/2"	7.82"	3.52"	2.50"	10
MI4275	2"	10.05"	4.27"	3.41"	10

## Aluminum Combination Conduit Bodies LL Type

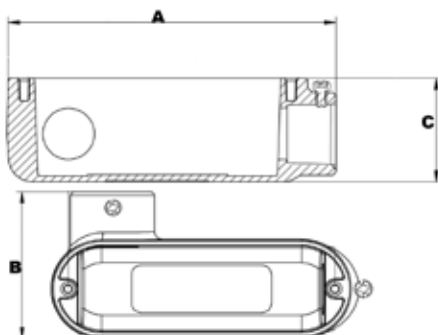

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls


CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES			BOX QTY
		A	B	C	
MI4276	1/2"	4.31"	2.03"	1.36"	50
MI4277	3/4"	5.08"	2.30"	1.63"	50
MI4278	1"	5.92"	2.68"	1.89"	25
MI4279	1-1/4"	7.82"	3.52"	2.50"	10
MI4280	1-1/2"	7.82"	3.52"	2.50"	10
MI4281	2"	10.05"	4.27"	3.41"	10
<b>WITH COVER AND GASKET</b>					
MI4282	1/2"	4.31"	2.03"	1.36"	50
MI4283	3/4"	5.08"	2.30"	1.63"	50
MI4284	1"	5.92"	2.68"	1.89"	25
MI4285	1-1/4"	7.82"	3.52"	2.50"	10
MI4286	1-1/2"	7.82"	3.52"	2.50"	10
MI4287	2"	10.05"	4.27"	3.41"	10

## Aluminum Combination Conduit Bodies C Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- Rain-tight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES			BOX QTY
		A	B	C	
MI4288	1/2"	4.72"	1.34"	1.36"	50
MI4289	3/4"	5.51"	1.56"	1.63"	50
MI4290	1"	6.46"	1.82"	1.89"	25
MI4291	1-1/4"	8.35"	2.51"	2.50"	10
MI4292	1-1/2"	8.35"	2.51"	2.50"	10
MI4293	2"	10.55"	3.19"	3.41"	10
<b>WITH COVER AND GASKET</b>					
MI4294	1/2"	4.72"	1.34"	1.36"	50
MI4295	3/4"	5.51"	1.56"	1.63"	50
MI4296	1"	6.46"	1.82"	1.89"	25
MI4297	1-1/4"	8.35"	2.51"	2.50"	10
MI4298	1-1/2"	8.35"	2.51"	2.50"	10
MI4299	2"	10.55"	3.19"	3.41"	10

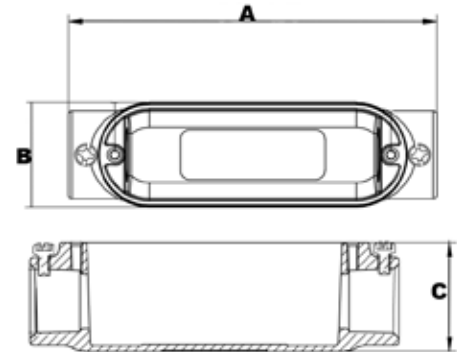


## Aluminum Service Entrance Condulets


- Tapered Threaded Hubs (NPT)
- Rain-tight with Gasketed covers
- Die Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

WITH GASKETED COVER

CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		A	B	C	D	
MI4307	1/2"	1.59"	1.38"	0.59"	3.15"	300
MI4308	3/4"	1.89"	1.71"	0.78"	3.58"	50
MI4310	1-1/4"	2.05"	1.93"	1.00"	4.17"	50

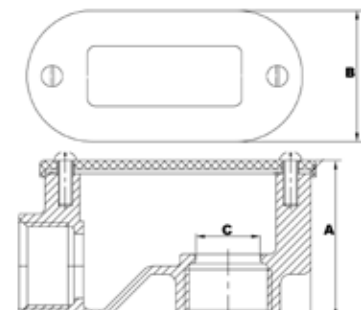

## Steel Conduit Body Covers




- Used with Conduit Body to cover opening
- Assembled with captive zinc plated steel screws
- Raised Center to Accommodate Cable Bend Radius



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4002	1/2"	3.90"	1.34"	25	250
MI4003	3/4"	4.67"	1.54"	25	200
MI4004	1"	5.37"	1.79"	10	100
MI4005	1-1/4" - 1-1/2"	7.28"	2.50"	-	50
MI4006	2"	9.49"	3.15"	-	50
MI4007	2-1/2" - 3"	12.21"	4.53"	-	20
MI4008	3-1/2" - 4"	14.96"	5.51"	-	10

## Aluminum Conduit Body Covers




- Used with Conduit Body to cover opening
- Stamped from high-strength corrosion and weather resistant copper-free aluminum alloy
- Assembled with captive zinc plated steel screws
- Raised Center to Accommodate Cable Bend Radius



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4010	1/2"	3.88"	1.34"	10	250
MI4011	3/4"	4.67"	1.56"	10	250
MI4012	1"	5.39"	1.77"	10	100
MI4013	1-1/4" - 1-1/2"	7.28"	2.50"	10	50
MI4014	2"	9.47"	3.13"	10	50
MI4015	2-1/2" - 3"	12.21"	4.53"	-	25
MI4016	3-1/2" - 4"	14.96"	5.51"	-	20

## Neoprene Rubber Conduit Body Gasket




- Gasket used with Conduit Body for a rain tight seal
- Neoprene Rubber Material

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4030	1/2"	3.90"	1.34"	100	1,000
MI4031	3/4"	4.67"	1.54"	100	1,000
MI4032	1"	5.37"	1.73"	50	500
MI4033	1-1/4" - 1-1/2"	7.28"	2.50"	50	500
MI4034	2"	9.49"	3.15"	30	300
MI4035	2-1/2" - 3"	12.21"	4.53"	10	100
MI4036	3-1/2" - 4"	14.96"	5.51"	10	100

## Liquid Tight Connectors - Straight - Zinc Die Cast

- Terminate and Seal Liquid Tight Flexible Metal Core Conduit to either oil tight, liquid tight or rain tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5240	3/8"	1.46"	1.20"	0.48"	25	250
MI5241	1/2"	1.46"	1.20"	0.56"	25	250
MI5242	3/4"	1.46"	1.46"	0.71"	15	150
MI5243	1"	1.87"	1.69"	0.94"	8	80
MI5244	1-1/4"	2.06"	2.17"	1.24"	5	50
MI5245	1-1/2"	2.07"	2.44"	1.45"	4	40
MI5246	2"	2.01"	2.87"	1.86"	2	20
MI5247	2-1/2"	3.33"	3.39"	2.22"	-	12
MI5248	3"	3.50"	4.09"	2.76"	-	12
MI5249	3-1/2"	4.05"	4.90"	3.05"	-	6
MI5250	4"	4.09"	5.04"	3.62"	-	6

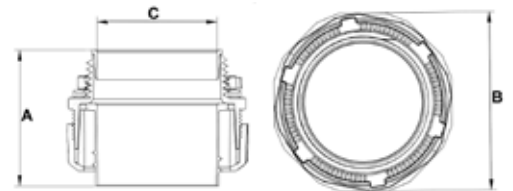

## Liquid Tight Connectors - Straight - Insulated - Zinc Die Cast

- Terminate and Seal Liquid Tight Flexible Metal Core Conduit to either oil tight, liquid tight or rain tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5251	3/8"	1.52"	1.20"	0.48"	25	250
MI5252	1/2"	1.52"	1.20"	0.56"	25	250
MI5253	3/4"	1.52"	1.46"	0.71"	15	150
MI5254	1"	1.93"	1.69"	0.94"	8	80
MI5255	1-1/4"	2.08"	2.17"	1.24"	5	50
MI5256	1-1/2"	2.15"	2.44"	1.45"	4	40
MI5257	2"	2.08"	2.87"	1.86"	2	20
MI5258	2-1/2"	3.41"	3.39"	2.22"	-	10
MI5259	3"	3.58"	4.09"	2.76"	-	10
MI5260	3-1/2"	4.07"	4.86"	3.33"	-	6
MI5261	4"	4.17"	5.04"	3.62"	-	6

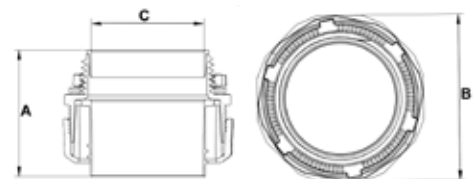

## 90° Liquid Tight Connectors - Zinc Die Cast



- 90° Orientation
- Terminate and Seal Liquid Tight Flexible Metal Core Conduit to either oil tight, liquid tight or rain tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5280	3/8"	0.48"	1.26"	2.04"	15	150
MI5281	1/2"	0.56"	1.26"	2.10"	15	150
MI5282	3/4"	0.71"	1.52"	2.36"	10	100
MI5283	1"	0.94"	1.77"	2.93"	5	50
MI5284	1-1/4"	1.24"	2.20"	3.34"	4	40
MI5285	1-1/2"	1.45"	2.46"	3.74"	2	20
MI5286	2"	1.86"	2.93"	4.21"	1	10
MI5287	2-1/2"	2.22"	3.54"	5.31"	-	6
MI5288	3"	2.76"	4.25"	6.47"	-	4
MI5289	3-1/2"	3.54"	4.86"	6.47"	-	3
MI5290	4"	3.62"	5.24"	6.90"	-	3

## 90° Liquid Tight Connectors - Insulated Throat - Zinc Die Cast




- 90° Orientation
- Terminate and Seal Liquid Tight Flexible Metal Core Conduit to either oil tight, liquid tight or rain tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5291	3/8"	0.48"	1.26"	2.09"	15	150
MI5292	1/2"	0.56"	1.26"	2.15"	15	150
MI5293	3/4"	0.71"	1.52"	2.69"	10	100
MI5294	1"	.94"	1.77"	2.98"	5	50
MI5295	1-1/4"	1.24"	2.20"	3.40"	4	40
MI5296	1-1/2"	1.45"	2.46"	3.80"	2	20
MI5297	2"	1.86"	2.93"	4.27"	1	10
MI5298	2-1/2"	2.22"	3.54"	5.39"	-	6
MI5299	3"	2.76"	4.25"	6.13"	-	4
MI5300	3-1/2"	3.33"	4.86"	6.55"	-	3
MI5301	4"	3.62"	5.24"	6.98"	-	3

### Liquid Tight Connectors - Straight - Insulated Throat - Malleable Iron

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5160	3/8"	1.01"	0.24"	1.19"	25	250
MI5161	1/2"	0.91"	0.55"	1.30"	25	250
MI5162	3/4"	0.98"	0.59"	1.50"	10	100
MI5163	1"	1.14"	0.63"	1.81"	5	50
MI5164	1-1/4"	1.22"	0.67"	2.20"	5	50
MI5165	1-1/2"	1.30"	0.43"	2.44"	10	50
MI5166	2"	1.50"	0.73"	2.95"	5	25



### Liquid Tight Connectors - 90° - Insulated Throat - Malleable Iron

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connector can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI5180	3/8"	1.28"	0.43"	1.12"	1.51"	10	100
MI5181	1/2"	1.42"	0.55"	1.30"	1.76"	10	100
MI5182	3/4"	1.73"	0.59"	1.50"	2.01"	10	100
MI5183	1"	2.01"	0.65"	1.81"	2.13"	5	50
MI5184	1-1/4"	2.30"	0.67"	2.20"	2.32"	-	10
MI5185	1-1/2"	2.62"	0.71"	2.44"	2.60"	-	10
MI5186	2"	2.99"	0.73"	2.95"	3.03"	-	5




### Liquid Tight Connectors - 45° - Insulated Throat - Malleable Iron

- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded KO using the Sealing Washer and Locknut

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI5220	3/8"	1.39"	0.49"	1.03"	1.18"	15	150
MI5221	1/2"	1.89"	0.55"	1.30"	1.34"	10	100
MI5222	3/4"	1.97"	0.59"	1.50"	1.57"	10	100
MI5223	1"	2.60"	0.65"	1.81"	1.81"	5	50
MI5224	1-1/4"	2.76"	0.67"	2.20"	2.09"	-	10
MI5225	1-1/2"	3.11"	0.71"	2.44"	2.36"	-	10
MI5226	2"	3.66"	0.73"	2.95"	2.64"	-	5




## Liquid Tight Connectors - Straight - Insulated Throat - Steel



- Terminate and Seal Liquid-tight Flexible Metal Core Conduit to either Oil-tight, Liquid-tight or Rain-tight Box or Enclosure
- Connectors can be used with Tapered Threaded Female Entry or Unthreaded Knockout using the Sealing Washer and Locknut provided

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
M15200	3/8"	0.98"	0.19"	1.72"	20	200
M15201	1/2"	0.91"	0.47"	1.12"	25	250
M15202	3/4"	1.02"	0.53"	1.37"	10	100
M15203	1"	1.12"	0.65"	1.70"	5	50
M15204	1-1/4"	1.26"	0.67"	2.07"	5	50
M15205	1-1/2"	1.46"	0.69"	2.30"	10	50
M15206	2"	1.50"	0.73"	2.80"	5	25


## Non-Metallic Liquid Tight Connectors - Straight



- Terminate and Seal Non-Metallic Liquid tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
M21813	1/2"	1.18"	0.55"	1.42"	25	150
M21814	3/4"	1.20"	0.64"	1.69"	10	100
M21815	1"	1.23"	0.72"	2.02"	5	50
M21816	1-1/4"	2.44"	0.76"	2.40"	5	50
M21817	1-1/2"	2.70"	0.80"	2.67"	4	40
M21818	2"	2.99"	0.85"	3.28"	2	20

## Non-Metallic Liquid Tight Connectors - 90°



- 90° Orientation
- Terminate and Seal Non-Metallic liquid tight Conduit
- Nylon Construction with Zinc Die-Cast Locknut
- UV Resistant

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
M21823	1/2"	2.84"	0.50"	2.03"	25	150
M21824	3/4"	3.25"	0.50"	2.33"	10	100
M21825	1"	3.54"	0.60"	2.95"	5	50
M21826	1-1/4"	4.75"	0.76"	5.20"	3	30
M21827	1-1/2"	4.75"	0.80"	5.20"	2	20
M21828	2"	5.42"	0.86"	5.80"	1	10

- Use to reduce the size of the knockout in a steel outlet box or other metal enclosure or cabinet
- Must use one inside the enclosure opening and one on the outside
- Galvanized Steel

## Reducing Washers

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4620	3/4" X 1/2"	1.44"	0.87"	100	1,000
MI4621	1" X 1/2"	1.71"	0.87"	100	1,000
MI4622	1" X 3/4"	1.74"	1.10"	100	1,000
MI4623	1-1/4" X 1/2"	2.08"	0.87"	50	500
MI4624	1-1/4" X 3/4"	2.08"	1.125"	50	500
MI4625	1-1/4" X 1"	2.08"	1.38"	50	500
MI4626	1-1/2" X 1/2"	2.635"	0.87"	50	500
MI4627	1-1/2" X 3/4"	2.635"	1.06"	50	500
MI4628	1-1/2" X 1"	2.635"	1.335"	50	500
MI4629	1-1/2" X 1-1/4"	2.635"	1.69"	50	500
MI4630	2" X 1/2"	3.265"	0.87"	25	250
MI4631	2" X 3/4"	3.265"	1.06"	25	250
MI4632	2" X 1"	3.265"	1.335"	25	250
MI4633	2" X 1-1/4"	3.265"	1.69"	25	250
MI4634	2" X 1-1/2"	3.265"	1.935"	25	250




## Locknuts - Zinc Die Cast

UL LISTED

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4720	1/2"	1.09"	0.12"	100	4,000
MI4721	3/4"	1.36"	0.14"	100	2,500
MI4722	1"	1.66"	0.16"	50	1,000

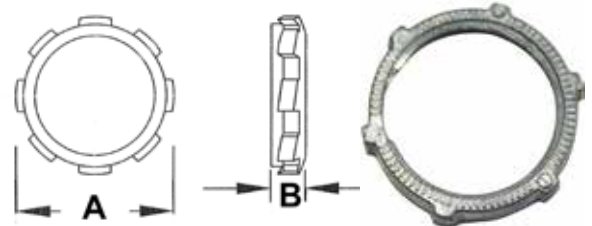

- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole


## Locknuts - Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4760	1/2"	1.13"	0.10"	-	1,000
MI4761	3/4"	1.39"	0.10"	-	1,000
MI4762	1"	1.71"	0.13"	-	1,000
MI4763	1-1/4"	2.07"	0.13"	50	500
MI4764	1-1/2"	2.39"	0.13"	50	500
MI4765	2"	2.88"	0.13"	25	250
MI4766	2-1/2"	3.45"	0.16"	-	100
MI4767	3"	4.14"	0.16"	-	100
MI4768	3-1/2"	4.70"	0.16"	-	100
MI4769	4"	5.30"	0.16"	-	100
MI4770	5"	6.51"	0.37"	-	20
MI4771	6"	7.85"	0.37"	-	20

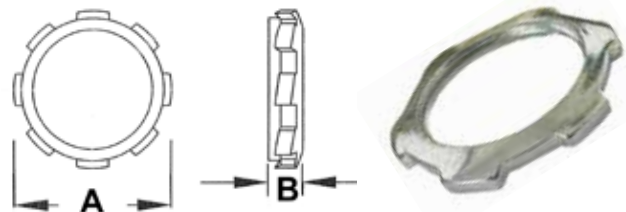

## Locknuts - Steel


UL LISTED



- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4730	1/2"	1.13"	0.11"	100	1,000
MI4731	3/4"	1.39"	0.12"	100	1,000
MI4732	1"	1.71"	0.15"	50	500
MI4733	1-1/4"	2.06"	0.15"	25	500
MI4734	1-1/2"	2.36"	0.15"	25	200
MI4735	2"	2.86"	0.16"	25	200
MI4736	2-1/2"	3.43"	0.20"	25	100
MI4737	3"	4.11"	0.20"	25	100
MI4738	3-1/2"	4.69"	0.21"	25	100
MI4739	4"	5.26"	0.22"	25	100
MI4740	5"	6.50"	0.43"	-	20
MI4741	6"	7.80"	0.43"	-	20

## Sealing Locknuts - Steel




- Sealing locknuts provide a rain tight seal when securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole of a box or enclosure
- Integral Gasket

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4754	1/2"	1.13"	0.21"	100	1,000
MI4755	3/4"	1.39"	0.22"	100	1,000
MI4756	1"	1.71"	0.31"	100	1,000
MI4757	1-1/4"	2.07"	0.29"	50	500
MI4758	1-1/2"	2.36"	0.29"	50	500
MI4759	2"	2.88"	0.29"	25	250

## Grounding Locknuts - Steel

UL LISTED



- Used with bushings to bond threaded rigid conduit and IMC to boxes, cabinets, or other enclosures where locknut is exposed

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4742	1/2"	1.14"	0.17"	100	1,000
MI4743	3/4"	1.39"	0.18"	100	1,000
MI4744	1"	1.73"	0.24"	50	500
MI4745	1-1/4"	2.08"	0.24"	25	200
MI4746	1-1/2"	2.40"	0.25"	25	200
MI4747	2"	2.91"	0.29"	25	100
MI4748	2-1/2"	3.46"	0.29"	25	100
MI4749	3"	4.14"	0.30"	25	100
MI4750	3-1/2"	4.69"	0.30"	25	100
MI4751	4"	5.25"	0.34"	25	100

## Rigid Water Tight Hubs - Zinc Die Cast

- To secure threaded rigid service entrance conduit & IMC to box or enclosure
- Assembled with 105°C rated flame retardant Lexan throat insulator and BUNA-N sealing ring that completely encircles knockout to prevent contaminants from entering enclosure
- UL Listed and CSA Certified for use in wet locations


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4800	1/2"	1.41"	1.41"	-	150
MI4801	3/4"	1.54"	1.66"	-	120
MI4802	1"	1.75"	1.95"	-	50
MI4803	1-1/4"	1.69"	2.41"	-	40
MI4804	1-1/2"	1.71"	2.69"	-	30
MI4805	2"	1.83"	3.20"	-	30
MI4806	2-1/2"	2.59"	3.69"	-	10
MI4807	3"	2.61"	4.39"	-	6
MI4808	3-1/2"	2.53"	4.72"	-	6
MI4809	4"	2.56"	5.47"	-	6




## Rigid Water Tight Hubs with Bonding Screw - Zinc

- Male thread type
- Tapered female thread for Rigid conduit and IMC
- Recessed O-ring seal assures watertight connections
- Insulated throat and bonding locknut is suitable for service entrance application
- Assembled with 105°C rated flame retardant Lexan throat insulator and BUNA-N sealing ring
- UL Listed and CSA Certified for use in wet locations

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI4810	1/2"	1.42"	1.22"	25	250
MI4811	3/4"	1.61"	1.50"	25	150
MI4812	1"	1.87"	1.89"	25	100
MI4813	1-1/4"	2.01"	2.24"	10	60
MI4814	1-1/2"	2.12"	2.52"	10	60
MI4815	2"	2.20"	3.03"	10	40
MI4816	2-1/2"	2.64"	3.54"	-	12
MI4817	3"	2.64"	4.07"	-	12
MI4818	3-1/2"	2.70"	4.78"	-	6
MI4819	4"	2.70"	5.35"	-	6

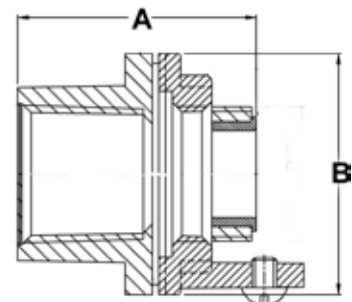


## Cord Grips - Zinc Die Cast



- Use to Connect S, SO, ST, SJ, SJO and SJT Cord to a Steel Outlet Box or other Metal Enclosure
- Neoprene Grommet for a moisture proof seal
- Simple Installation, cord can be installed without disassembly of the fitting
- Liquid-tight/Oil-tight/Rain-tight
- Suitable for NEMA 4 Enclosures and other wet locations
- Male Tapered NPT Threading
- Colored Seal allows for Easy Identification

CAT. NO.	TRADE SIZE	INSERT COLOR	CABLE RANGE C	OVERALL DIM.		INNER BOX	OUTER BOX
				A	B		
M15450	1/2"	RED	0.190" - 0.260"	1.22"	1.14"	25	250
M15451	1/2"	BLUE	0.260" - 0.375"	1.22"	1.14"	25	250
M15452	1/2"	GREEN	0.375" - 0.500"	1.22"	1.14"	25	250
M15453	3/4"	GREEN	0.375" - 0.500"	1.34"	1.20"	25	250
M15454	3/4"	BROWN	0.500" - 0.625"	1.34"	1.20"	25	250
M15455	3/4"	ORANGE	0.625" - 0.725"	1.34"	1.20"	25	250
M15457	1"	BROWN	0.500" - 0.650"	1.42"	1.69"	10	100
M15458	1"	ORANGE	0.625" - 0.750"	1.42"	1.69"	10	100
M15459	1"	BLACK	0.750" - 0.880"	1.42"	1.69"	10	100
M15460	1"	PURPLE	0.880" - 0.985"	1.42"	1.69"	10	100

## Metal Cable Glands - NPT Thread




- Used to introduce cables or leads into metal housings, or to introduce reinforced cables
- Designed for use in areas of zone 1(2G) and 21(1D) with no risk of explosion and for cables with and without reinforcement
- In case of systems or housing manufactured according to NEC, the line or the connecting cable must be introduced by conduits, mounting fittings, etc. with NPT threads
- Working Temp: -40°F to 212°F
- Brass Nickel Plated
- IP 68 (NEMA 6P) rated - Submersible & Dustproof



CAT. NO.	CABLE RANGE	DIMENSIONS			INNER BAG QTY	OUTER BOX QTY
		DI THREAD	GL	H		
M22601	0.24" - 0.48"	1/2"	0.51"	0.94"	100	800
M22602	0.40" - 0.55"	1/2"	0.51"	0.94"	50	600
M22603	0.51" - 0.71"	3/4"	0.51"	0.98"	50	500
M22604	0.71" - 0.99"	1"	0.67"	1.14"	25	400

## Metal Cable Glands - Metric Thread



- Cable Glands with Metric threads are now standard and replacements for the PG Cable Glands
- Used to introduce cables or leads into metal housings or to introduce reinforced cables
- Designed for use in areas of zone 1(2G), and 21(1D) with no risk of explosion and for cables with and without reinforcement
- Working Temp: -40°F to 212°F
- Brass Nickel Plated
- IP 68 (NEMA 6P) rated - Submersible & Dustproof




CAT. NO.	CABLE RANGE	DIMENSIONS			INNER BAG QTY	OUTER BOX QTY
		DI THREAD	GL	H		
M22590	0.12" - 0.26"	M12	0.26"	0.75"	100	2,000
M22591	0.16" - 0.32"	M16	0.24"	0.83"	100	1,500
M22592	0.20" - 0.40"	M16	0.24"	0.83"	100	1,000
M22593	0.24" - 0.48"	M20	0.24"	0.91"	100	800
M22594	0.40" - 0.55"	M20	0.24"	0.91"	50	600
M22595	0.51" - 0.71"	M25	0.28"	1.02"	50	500
M22596	0.71" - 0.99"	M32	0.31"	1.22"	20	400
M22597	0.87" - 1.26"	M40	0.31"	1.46"	10	160
M22598	1.26" - 1.50"	M50	0.35"	1.46"	10	120
M22599	1.46" - 1.73"	M63	0.39"	1.50"	10	80

### 3/8" NM Connector - Zinc Die Cast

- Used to connect Non-Metallic Sheath Cable and Flexible Cord from 0.30" to 0.45" in diameter to Outlet Boxes, Enclosures, or Raceway Systems
- 3/8" size fits 1/2" knockout
- Assembled with Zinc Die Cast Locknut and Combo Screws


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI5330	3/8"	0.78"	0.35"	100	1,000

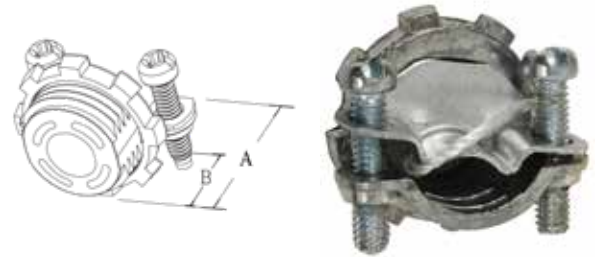

### Non-Watertight NM Round Connectors - Zinc Die Cast

- Used with Locknut to Terminate Service Entrance Cable to Enclosure
- Assembled with Zinc Die Cast Locknut and Combo Screws
- For Type SEU and NM Cable


CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
MI5331	3/4"	0.83"	0.32"	0.83"	1.67"	40	400
MI5332	1"	1.14"	0.55"	1.04"	1.95"	20	200
MI5333	1-1/4"	1.24"	0.57"	1.38"	2.20"	15	150
MI5334	1-1/2"	1.40"	0.57"	1.61"	2.60"	10	100
MI5335	2"	1.50"	0.65"	2.05"	3.03"	8	80



### Non-Watertight NM Oval Connectors - Zinc Die Cast

- Used with Locknut to Terminate NM Cable to Enclosure
- Assembled with Zinc Die Cast Locknut and Combo Screws
- For NM Oval Cable


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5337	1-1/4"	2.26"	1.29"	1.91"	10	100
MI5338	1-1/2"	2.84"	1.30"	2.19"	10	100
MI5339	2"	3.48"	1.51"	2.76"	5	50




### Tilt-in NM Connectors - Steel

- To terminate one or more Non-Metallic Sheathed Cables to a Knockout in a dry location box or enclosure
- Zinc Plated Steel
- No locknut Required

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI9012	1/2"	1.31"	0.59"	100	1000
MI9013	3/4"	1.73"	0.75"	-	100
MI9014	1-1/4"	1.97"	0.69"	-	50
MI9015	1-1/2"	2.52"	0.78"	25	250



## Flex Angled Set Screw Box Connectors - Zinc Die Cast




- Use to connect Steel or Aluminum Flexible Metallic Conduit to a Steel Box or other Metal Enclosure
- Angled Combo Head Set Screw for Easy Access
- Furnished with Die Cast Zinc locknuts



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M15053	1/2"	1.20"	1.48"	25	250
M15054	3/4"	1.33"	1.56"	25	250

## Flex 2 Set Screw - Strap Type Multi-Purpose Box Connectors




- Terminate flexible metallic conduit FMC, AC, MC, or NM cable to a Steel box or other enclosure:
  - 14/2, 12/2 or 12/3 NM Cable
  - 14/2 Thru 12/4 AC or MC Cable
  - 3/8" FMC Cable
- 3/8" Trade Size fits a 1/2" knockout
- Male Hub - NPSM Thread
- Combination Head Screws
- Zinc Die Cast



CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M15058	3/8"	0.78"	0.35"	100	1,000

## Flex Saddle Box Connector For AC & MC Flex Conduits - Zinc




- Use to connect flexible metal conduit, AC, MC and NM sheathed cable to a Steel Box or other Metal Enclosure
- 3/8" size fits 1/2" knockout
- End Stopped
- Combo Head Screws
- Zinc Die Cast



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B (MIN)	B (MAX)		
M15060	3/8"	0.93"	0.40"	0.50"	500	500

### Flex Duplex Box Connectors - Zinc Die Cast


- Use to connect two pieces of Flexible Metallic Conduit, AC, MC, or NM sheathed cable to a steel box or other metal enclosure when using only one knockout opening:
  - 14/2 Thru 12/3 NM
  - 14/2 Thru 10/4 AC
  - 14/2 Thru 10/3 MC
  - 3/8" FMC
- 3/8" size fits 1/2" knockout
- One Screw design



CAT. NO.	TRADE SIZE	# OF SCREWS	DIMENSIONS			INNER BOX	OUTER BOX
			A	B	C		
M15065	3/8"	1	1.59"	1.62"	0.46"	25	250


### Anti-Short Bushings

- Insulates conductor from cut armor ends on flexible BX or Greenfield conduit
- Inserted into I.D. at termination point
- Overlapping horizontal flange protects against sharp metal edges
- Tapered design assures fast insertion
- Extra length assures positive grip
- Polypropylene material resists weather extremes oil, moisture and chemicals
- Rated up to 194°F



CAT. NO.	SIZE	CABLE SIZES	DIMENSIONS				BAG QTY
			A	B	C	D	
M21752	0	14/2, 14/3, 12/2	0.56"	0.671"	0.38"	0.312"	35
M21753	1	14/4, 12/3, 6/1, 4/1	0.65"	0.671"	0.45"	0.312"	35
M21754	2	12/4, 10/2, 10/3, 2/1	0.61"	0.859"	0.58"	0.125"	35
M21755	3	10/4, 8/2, 8/3, 1/1	0.67"	1.046"	0.79"	0.109"	20
M21756	4	8/4, 6/4, 6/3, 6/2, 4/3, 4/2	0.83"	1.266"	1.00"	0.156"	16

## Screw-In Connector For Greenfield/Flex Conduit




- Use to connect Flexible Metallic Conduit to steel outlet box, load center or other metal enclosure
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5070	3/8"	1.22"	0.38"	1.10"	80	800
MI5071	1/2"	1.30"	0.64"	1.10"	60	600
MI5072	3/4"	1.52"	0.81"	1.38"	35	350
MI5073	1"	1.87"	1.00"	1.70"	15	150
MI5074	1-1/4"	2.13"	1.27"	2.10"	10	100
MI5075	1-1/2"	2.32"	1.51"	2.42"	6	60
MI5076	2"	2.48"	2.02"	2.98"	3	30

## Screw-In Connector Insulated Throat For Greenfield/Flex Conduit




- Use to connect Flexible Metallic Conduit to steel outlet box, load center or other metal enclosure
- Insulated Throat
- Zinc Die Cast
- Assembled with Zinc Die Cast locknut



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B (OD)	C		
MI5077	3/8"	1.26"	0.38"	1.10"	80	800
MI5078	1/2"	1.34"	0.64"	1.10"	60	600
MI5079	3/4"	1.56"	0.81"	1.38"	35	350
MI5080	1"	1.91"	1.00"	1.70"	15	150
MI5081	1-1/4"	2.17"	1.27"	2.10"	10	100
MI5082	1-1/2"	2.36"	1.51"	2.42"	6	60
MI5083	2"	2.52"	2.02"	2.98"	3	30

## Screw-In Couplings For Greenfield/Flex Conduit



- Use to connect two pieces of Flexible Metal Conduit
- Zinc Die Cast




CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5084	1/2"	1.81"	0.91"	0.20"	40	400
MI5085	3/4"	2.09"	1.10"	0.24"	25	250
MI5086	1"	2.40"	1.36"	0.32"	15	150
MI5087	1-1/4"	2.76"	1.66"	0.32"	10	100
MI5088	1-1/2"	3.08"	1.93"	0.32"	6	60
MI5089	2"	3.32"	2.48"	0.32"	3	30

## Straight Squeeze Box Connectors

- Used with a locknut to terminate steel or aluminum Flexible Metal Conduit, Armored Cable & MC to enclosure
- Assembled with Zinc Die Cast Locknut & Combo Screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M15110	3/8"	1.15"	0.35"	50	500
M15111	1/2"	1.44"	0.59"	25	250
M15112	3/4"	1.58"	0.77"	25	250
M15113	1"	1.76"	0.98"	-	100
M15114*	1-1/4"	1.87"	1.21"	-	100
M15115*	1-1/2"	2.01"	1.41"	-	50
M15116*	2"	2.09"	1.95"	4	40
M15117*	2-1/2"	2.85"	2.32"	-	10
M15118*	3"	2.24"	2.82"	-	10
M15119*	3-1/2"	4.06"	3.28"	-	10
M15120*	4"	4.16"	3.76"	-	10

\* Flexible Metal Conduit Only

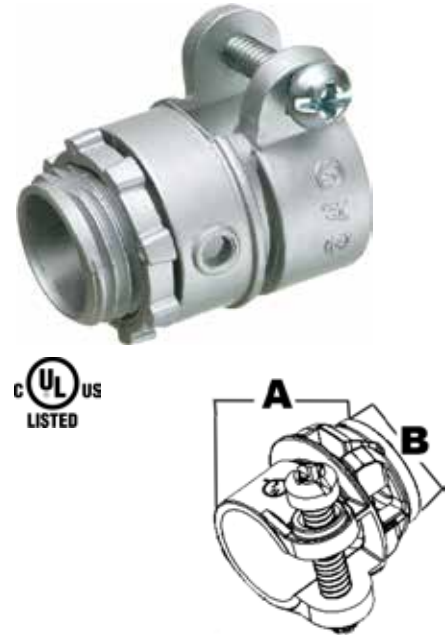


## Straight Squeeze Box Connectors - Insulated Throat


- Used with a locknut to terminate steel or aluminum Flexible Metal Conduit, Armored Cable & MC to Enclosure
- Insulated Throat
- Assembled with Zinc Die Cast Locknut & Combo screws

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M15121	1/2"	1.44"	0.54"	25	250
M15122	3/4"	1.58"	0.70"	25	250
M15123	1"	1.76"	0.92"	10	100
M15124*	1-1/4"	1.87"	1.65"	10	100
M15125*	1-1/2"	2.01"	1.97"	5	50
M15126*	2"	2.09"	2.47"	4	40
M15127*	2-1/2"	2.85"	2.32"	-	18
M15128*	3"	2.24"	2.82"	-	12
M15130*	4"	4.24"	3.76"	-	8

\* Flexible Metal Conduit Only

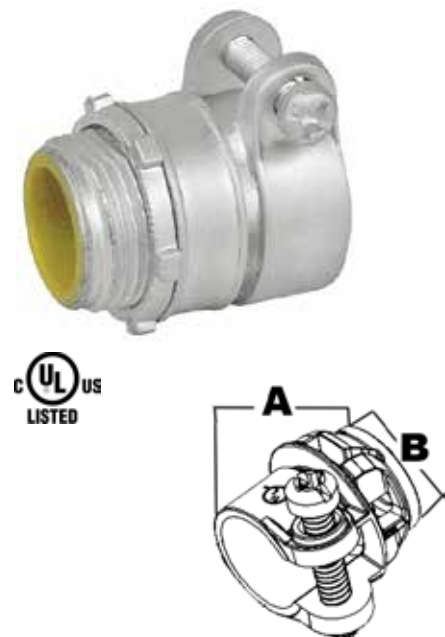

## Squeeze Box Connectors 90°

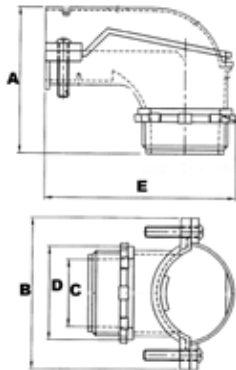


- Used with a locknut to Terminate Steel or Aluminum Flexible Metal Conduit, AC and MC Cable to a steel outlet box or other metal enclosure
- Assembled with Zinc Die Cast Locknut & Combo Screws

CAT. NO.	TRADE SIZE	DIMENSIONS					INNER BOX	OUTER BOX
		A	B	C	D	E		
MI5131	3/8"	1.22"	1.34"	0.63"	0.97"	1.75"	50	500
MI5132	1/2"	1.50"	1.65"	0.63"	0.97"	2.12"	25	250
MI5133	3/4"	1.58"	1.89"	0.86"	1.20"	2.35"	10	100
MI5134	1"	2.26"	2.38"	1.04"	1.45"	2.77"	5	50
MI5135*	1-1/4"	2.76"	2.68"	1.42"	1.86"	3.89"	10	40
MI5136*	1-1/2"	4.06"	3.76"	1.58"	2.32"	6.01"	2	12
MI5137*	2"	4.08"	3.76"	2.07"	2.66"	6.01"	2	12
MI5138*	2-1/2"	6.90"	5.40"	2.50"	3.07"	6.80"	-	10
MI5139*	3"	7.80"	5.70"	3.15"	3.71"	7.89"	-	6
MI5140*	3-1/2"	9.40"	7.52"	3.46"	4.53"	5.66"	-	3
MI5141*	4"	10.50"	8.28"	3.94"	5.04"	9.78"	-	3

\* Flexible Metal Conduit Only

## Squeeze Box Connectors 90° - Insulated Throat

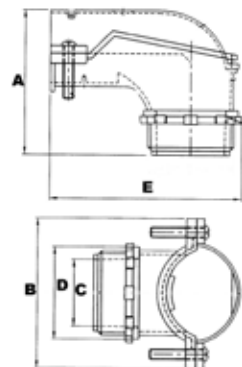

- Used with a locknut to Terminate Steel or Aluminum Flexible Metal Conduit, AC and MC Cable to a steel outlet box or other metal enclosure
- Insulated Throat
- Assembled with Zinc Die Cast Locknut & Combo Screws


CAT. NO.	TRADE SIZE	DIMENSIONS					INNER BOX	OUTER BOX
		A	B	C	D	E		
MI5142	3/8"	1.26"	1.34"	0.55"	0.97"	1.81"	50	500
MI5143	1/2"	1.54"	1.65"	0.55"	0.97"	2.18"	25	250
MI5144	3/4"	1.61"	1.89"	0.73"	1.20"	2.41"	10	100
MI5145	1"	2.26"	2.38"	0.96"	1.46"	2.83"	5	50
MI5146*	1-1/4"	2.82"	2.68"	1.24"	1.81"	2.85"	10	40
MI5147*	1-1/2"	4.08"	3.76"	1.44"	2.32"	6.01"	2	12
MI5148*	2"	4.08"	3.76"	1.89"	2.58"	6.01"	2	12
MI5149*	2-1/2"	6.90"	5.40"	2.30"	3.07"	6.875"	-	6
MI5150*	3"	7.80"	5.70"	2.95"	3.70"	7.97"	-	4
MI5151*	3-1/2"	9.40"	7.52"	3.27"	4.53"	5.57"	-	3
MI5152*	4"	10.50"	8.26"	3.74"	5.04"	9.86"	-	3

\* Flexible Metal Conduit Only

## *EMT to Flex Combination Coupling Squeeze Type - Zinc Die Cast*

- Use to join EMT Conduit to Flexible Metal Conduit
- They allow a quick connection between different conduits to create one continuous raceway
- Their smooth interior surface ensures a snag free wire pull every time
- Pre-set and staked Robertson combo head screws

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B			
MI5416	1/2"	1.65"	1.42"	25	250	
MI5417	3/4"	1.97"	1.55"	15	150	
MI5418	1"	2.00"	1.63"	-	200	

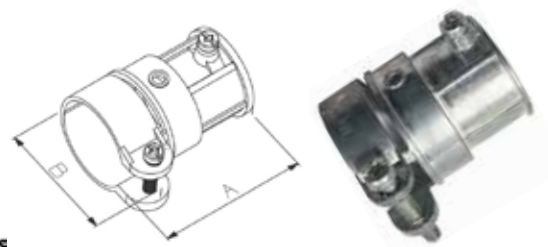

## *EMT to BX or NM Cable Combination Set Screw Couplings*

- Set Screw 1/2" EMT to 2 Screw 3/8" BX/NM Cable
- Used on EMT Conduit, BX cable, NM cable
- They allow a quick connection between different conduits to create one continuous raceway
- Zinc Die Cast


CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5411	1/2"	1.33"	0.93"	0.73"	50	500




## *EMT to Greenfield Combination Compression Couplings*

- To join EMT to Flexible Metallic Conduit
- Compression for EMT and Screw-In for Flex Conduit
- Zinc Die Cast

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5420	1/2"	1.61"	0.98"	0.57"	50	500
MI5421	3/4"	1.87"	1.20"	0.73"	25	250
MI5422	1"	1.96"	1.43"	0.92"	10	100

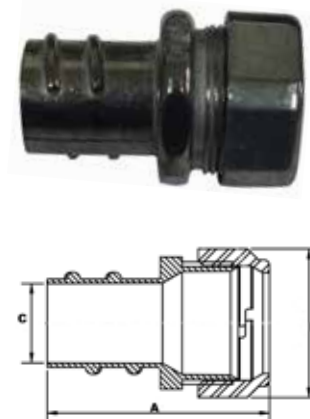


## Water-Tight Service Entrance Connectors - Zinc Die-Cast



- Compression Type SEU Connector
- Used to Connect Service Entrance Cable to a Service Enclosure in Wet Locations
- Accepts 2 Insulated Conductors, 1 Bare
- U/Flat Style Conductor Only
- Assembled with Rubber Grommet and Steel Washer
- Locknut Included

CAT. NO.	TRADE SIZE	CABLE SIZE	MAX GROMMET OPENING		OVERALL DIMENSIONS		INNER BOX	OUTER BOX
			LENGTH	WIDTH	A	B		
MI5370	1"	#8	0.67"	0.40"	1.67"	1.45"	20	100
MI5371	1"	#6	0.77"	0.50"	1.67"	1.45"	20	100
MI5372	1"	#4	0.81"	0.53"	1.67"	1.45"	20	100
MI5373	1-1/4"	#3	0.92"	0.56"	2.05"	1.80"	10	50
MI5374	1-1/4"	#2	0.98"	0.59"	2.05"	1.80"	10	50
MI5375	1-1/4"	#1	1.09"	0.65"	2.05"	1.80"	10	50
MI5377	1-1/2"	#2/0	1.34"	0.86"	2.31"	2.02"	10	50
MI5379	2"	#2/0	1.34"	0.86"	2.82"	2.39"	5	25
MI5380	2"	#3/0	1.37"	0.87"	2.82"	2.39"	5	25

## PVC Entrance Caps - Conduit Mount

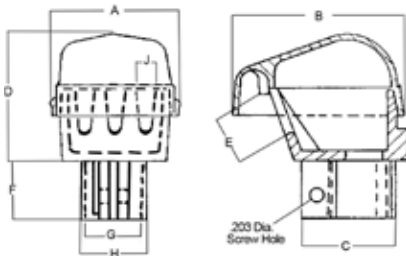

- Entrance head for mounting on PVC, RIGID, IMC and EMT Conduit (Red adaptor included for EMT)
- Rugged Non-Metallic Design is resistant to adverse weather conditions
- Provides 50% Larger Wiring Compartment than other entrance heads
- Entire Head acts as an Insulator of high dielectric strength


CAT. NO.	SIZE	DIMENSIONS									BOX QTY
		A	B	C	D	E	F	G	H	J	
M21787	2"	4.53"	6.31"	3.38"	3.81"	1.44"	1.63"	2.39"	2.69"	0.75"	20

## Aluminum Service Entrance Cap - Clamp On

- Clamp-on type head used with Rigid conduit, IMC or E.M.T. for pulling service drop conductors
- Cast Aluminum
- Bar type Clamp
- Heavy pressure clamp in body
- Weather resistant
- Assembled with electrical grade phenolic insulator with multiple holes



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5520	1/2"	2.68"	2.50"	2.19"	-	100
MI5521	3/4"	3.04"	2.76"	2.39"	-	100
MI5522	1"	3.48"	2.96"	2.58"	-	100
MI5523	1-1/4"	4.22"	3.27"	3.06"	-	60
MI5524	1-1/2"	5.22"	4.28"	3.49"	-	60
MI5525	2"	6.68"	5.81"	4.33"	-	30
MI5526	2-1/2"	9.94"	7.05"	6.54"		4
MI5527	3"	11.69"	8.54"	6.93"		4
MI5528	3-1/2"	11.69"	8.54"	7.28"		4
MI5529	4"	11.69"	8.54"	7.86"		4

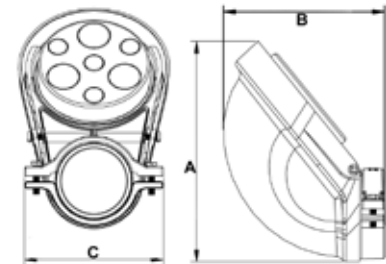


## Aluminum Service Entrance Cap - Conduit Mount Threaded


- Conduit Mount Head used with Rigid or IMC for Pulling Service Entrance Conductors
- Weather Resistant
- Assembled with Electrical Grade Phenolic Insulator with multiple holes



CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
MI5530	1/2"	1.97"	2.68"	2.29"	-	100
MI5531	3/4"	2.13"	3.04"	2.66"	-	100
MI5532	1"	2.36"	3.48"	2.96"	-	100
MI5533	1-1/4"	2.68"	4.22"	3.11"	-	60
MI5534	1-1/2"	3.39"	5.22"	4.06"	-	60
MI5535	2"	4.33"	6.69"	5.28"	-	30
MI5536	2-1/2"	6.30"	9.94"	6.69"		4
MI5537	3"	7.99"	11.69"	8.08"		4
MI5538	3-1/2"	7.99"	11.69"	8.08"		4
MI5539	4"	7.99"	11.69"	8.08"		4

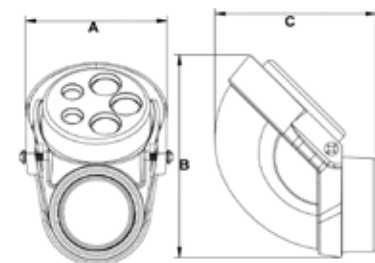


## Steel Snap-In Blanks



- For use in closing off unused openings in boxes or panel boards
- All steel construction provides installation integrity
- Snap-Fit Design

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M21800	1/2"	1.08"	0.29"	100	1,000
M21801	3/4"	1.23"	0.31"	100	1,000
M21802	1"	1.47"	0.34"	100	1,000
M21803	1-1/4"	1.88"	0.37"	50	500
M21804	1-1/2"	2.22"	0.31"	50	500
M21805	2"	2.67"	0.34"	10	100

## Type S With Screw and Bar Knockout Seals




- Set screw/bar type knockout seals are inserted in open box knockouts to protect exposed wires
- Used in standard, air tight or dust tight applications
- Pre-assembled screw and backer bar slides on open knockout holes without removing box devices or covers
- Steel Galvanized

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
M21790	1/2"	1.20"	0.27"	100	500
M21791	3/4"	1.39"	0.32"	100	500
M21792	1"	1.66"	0.28"	50	500
M21793	1-1/4"	2.10"	0.33"	50	500
M21794	1-1/2"	2.46"	0.33"	10	300
M21795	2"	2.94"	0.34"	10	300
M21796	2-1/2"	3.75"	0.34"	-	100
M21797	3"	4.51"	0.34"	-	100
M21798	3-1/2"	5.01"	0.34"	-	100
M21799	4"	5.50"	0.34"	-	100

## Plastic Knockout Plugs

- To cap knockout holes in box or enclosure

CAT. NO.	TRADE SIZE	MOUNTING HOLE DIAMETER	A	BAG QTY
M21721	1/2"	0.85"	1-1/8"	100
M21722	3/4"	1.10"	1-1/4"	100
M21723	1"	1.35"	1-1/2"	50




\*Suitable for EMT, Rigid or IMC conduit

SIZES LISTED ARE ACTUAL DIAMETER  
(NOT TRADE SIZES EXCEPT WHERE NOTED)

- Plugs electrical knockouts with finger tip pressure
- Snap-In Winged Protrusion for Positive Lock
- Low cost and assures good appearance
- Less costly & safer than steel snap-in blanks
- 1/8" maximum steel thickness
- Made from UL approved Nylon 6/6, 94V-2

## Plastic Knockout Plugs - Snap-In


CAT. NO.	MOUNTING HOLE DIAMETER	HEAD DIAMETER	OVERALL HEIGHT	BAG QTY
M22380	0.18" (3/16")	0.25"	0.23"	10
M22382	0.31" (5/16")	0.47"	0.31"	10
M22384	0.37" (3/8")	0.51"	0.41"	10
M22386	0.50" (1/2")	0.67"	0.41"	10
M22388	0.63" (5/8")	0.78"	0.41"	10
M22390	0.75" (3/4")	0.90"	0.41"	10
M22392	0.87" (7/8") (1/2" TRADE)	0.98"	0.44"	10
M22394	0.98" (1")	1.11"	0.44"	10
M22396	1.18" (1-1/4")	1.35"	0.44"	10
M22398	1.50" (1-1/2")	1.67"	0.44"	10
M22400	1.75" (1-3/4")	1.93"	0.44"	10



## Plastic Pull Caps

- Used for capping EMT, IMC & Rigid Conduits and most bushings

CAT. NO.	TRADE SIZE	DIMENSIONS		BOX QTY
		A	B	
M21712	1/2"	11/16"	5/8"	100
M21713	3/4"	15/16"	13/16"	100
M21714	1"	1-3/16"	1-1/16"	100
M21715	1-1/4"	1-1/2"	1-3/8"	50
M21716	1-1/2"	1-3/4"	1-9/16"	25
M21717	2"	2-3/16"	2-1/16"	25



## 1 Hole EMT Pipe Straps - Steel

- 3", 3-1/2" & 4" Fits EMT, Rigid or IMC conduit Secures EMT Conduit
- Reinforced Rib for Extra Strength
- Reinforced Hole
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
MI9400	1/2"	100	1000
MI9401	3/4"	100	1000
MI9402	1"	100	500
MI9403	1-1/4"	25	250
MI9404	1-1/2"	20	100
MI9405	2"	10	100
MI9431*	3"	-	10
MI9432*	3-1/2"	-	10
MI9433*	4"	-	10

## 2 Hole EMT Pipe Straps - Steel

- Secures EMT Conduit
- Reinforced Rib for Extra Strength
- 2 Hole - Reinforced Holes
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
MI9412	1/2"	100	1,000
MI9413	3/4"	50	500
MI9414	1"	25	250
MI9415	1-1/4"	25	250
MI9416	1-1/2"	10	100
MI9417	2"	5	50

## 1 Hole Rigid Pipe Straps - Heavy Duty - Steel

- 3", 3-1/2", 4" Fits EMT, Rigid or IMC conduit Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Reinforced Hole
- Snap-On Installation
- Zinc Plated Steel



CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
MI9424	1/2"	100	1,000
MI9425	3/4"	50	500
MI9426	1"	25	250
MI9427	1-1/4"	25	250
MI9428	1-1/2"	20	200
MI9429	2"	10	100
MI9430	2-1/2"	5	50
MI9431*	3"	-	10
MI9432*	3-1/2"	-	10
MI9433*	4"	-	10

\*Suitable for EMT, Rigid or IMC conduit

## 2 Hole Rigid Pipe Straps - Steel

- Secures Rigid & IMC Conduit
- Reinforced Rib for Extra Strength
- Reinforced Holes
- Snap-On Installation
- Zinc Plated Steel




CAT. NO.	TRADE SIZE	INNER BOX	OUTER BOX
MI9436	1/2"	100	1,000
MI9437	3/4"	50	500
MI9438	1"	25	250
MI9439	1-1/4"	20	200
MI9440	1-1/2"	10	100
MI9441	2"	5	50
MI9442	2-1/2"	-	50
MI9443	3"	-	50
MI9444	4"	-	10

- Provides Space between conduit and mounting surface
- For use with malleable iron or aluminum straps
- Can be used with one hole straps
- Heavy Duty Casting

## Malleable EMT/Rigid Clamp Back Spacers

CAT. NO.	TRADE SIZE	DIMENSIONS							INNER BOX	OUTER BOX
		A	B	C	D	E	F	G		
MI4782	1/2"	2.06"	1.00"	0.50"	0.43"	0.32"	0.40"	0.08"	25	250
MI4783	3/4"	2.38"	1.06"	0.50"	0.53"	0.32"	0.40"	0.08"	25	250
MI4784	1"	2.94"	1.25"	0.56"	0.67"	0.32"	0.40"	0.08"	25	250
MI4785	1-1/4"	3.50"	1.38"	0.75"	0.84"	0.32"	0.40"	0.08"	10	100
MI4786	1-1/2"	3.81"	1.44"	0.81"	0.96"	0.32"	0.40"	0.08"	10	100
MI4787	2"	4.75"	1.94"	1.00"	1.20"	0.32"	0.40"	0.08"	5	50
MI4788	2-1/2"	5.75"	2.44"	0.75"	1.45"	0.32"	0.40"	0.08"	-	25
MI4789	3"	6.69"	2.63"	0.088"	1.77"	0.32"	0.40"	0.08"	-	10
MI4790	3-1/2"	7.13"	2.88"	1.08"	2.02"	0.32"	0.40"	0.08"	-	10
MI4791	4"	8.88"	3.06"	1.06"	2.27"	0.32"	0.40"	0.08"	-	10

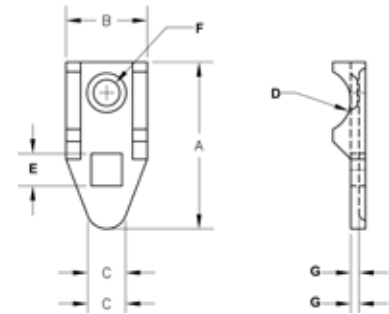

- Secures SE & SEU Service Entrance Cable
- Zinc Plated Steel

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
MI9452	{3}#8, {3}#6 OR {3}#4	100	1,000
MI9453	{3}#3 OR {3}#2	100	1,000
MI9454	{3}#1, {3}#1/0, {3}#2/0	50	500
MI9455	{3}#3/0, {3}#4/0	50	500

## 1 Hole SEU Pipe Straps



- Secures SE & SEU Service Entrance Cable
- Zinc Plated Steel

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
MI9456	{3}#8 OR {3}#6, {3}#4	100	1,000
MI9457	{3}#2 OR {3}#3	100	1,000
MI9458	{3}#1, {3}#1/0, OR {3}#2/0	50	500
MI9459	{3}#3/0, {3}#4/0	25	250

## 2 Hole SEU Pipe Straps



## Non Metallic Cable One Hole Strap

- Used To Secure 14/2 NM Romex Cables
- Zinc Plated Steel
- Reinforced Rib for Extra Strength

CAT. NO.	CABLE SIZE	INNER BOX	OUTER BOX
MI9460	14/2	100	1000



## BX 1 Hole Strap



- These one-hole pipe straps are ideal for hanging tubing, pipe, conduit and BX cable
- Pre-galvanized zinc plated steel

CAT. NO.	CABLE SIZE	BOX QTY
MI9463*	BX: 14 - 2 THRU 10 - 3	100
MI9464	EMT: 1/2", RIGID: 1/4", BX: 12 - 3, 10 - 2, 10 - 3 SER 8	100

\*Not UL listed


## Conduit Hanger with Bolt



- Secures EMT or Rigid Conduit to any mounting surface, Threaded Rod or Insulated Supports
- Zinc Plated Steel

CAT. NO.	TRADE SIZE	CONDUIT TYPE & SIZE	OUTER BOX
MI9470	1/2"	EMT & RIGID	100
MI9471	3/4"	EMT & RIGID	100
MI9472	1"	EMT & RIGID	100
MI9473	1-1/4"	EMT	100
MI9474	1-1/4" 1-1/2"	1-1/2" EMT 1-1/4" RIGID	100
MI9475	1-1/2"	1-1/2" RIGID	100
MI9476	2"	EMT & RIGID	50
MI9477	2-1/2"	EMT & RIGID	25
MI9478	3"	EMT & RIGID	25
MI9479	3-1/2"	EMT & RIGID	25
MI9480	4"	EMT & RIGID	25


## Nail Straps - Heavy Duty - Rigid IMC & EMT

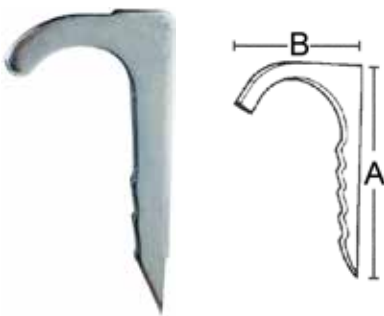

- Secures Rigid, IMC & EMT Conduits thru 1" Diameter
- Zinc Plated Stamped Steel
- Wood or Masonry Applications

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI9482	1/2"	2.13"	1.10"	100	1,000
MI9483	3/4"	2.13"	1.20"	100	1,000
MI9484	1"	2.25"	1.50"	50	500

## Nail Plates

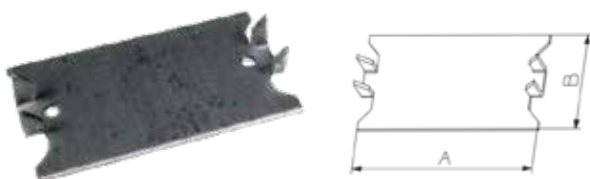

- Used to protect internal wire runs from nail punctures
- Hammer On
- Zinc Plated Stamped Steel

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
MI9542	1-1/2" X 2-1/2"	2.5"	1.5"	100	500

M14340-M14345	<b>1</b>	M14940-M14949	<b>14</b>	M14002-M14008	<b>28</b>	M15110-M15120	<b>41</b>
M14350-M14355	<b>1</b>	M14950-M14959	<b>14</b>	M14010-M14016	<b>28</b>	M15121-M15130	<b>41</b>
M14408-M14409	<b>1</b>	M14960-M14969	<b>14</b>	M14030-M14036	<b>28</b>	M15131-M15141	<b>42</b>
M14360-M14365	<b>2</b>	M14970-M14979	<b>15</b>	M15240-M15250	<b>29</b>	M15142-M15152	<b>42</b>
M14370-M14375	<b>2</b>	M14980-M14989	<b>15</b>	M15251-M15261	<b>29</b>	M15416-M15418	<b>43</b>
M14380-M14385	<b>2</b>	M14990-M14999	<b>15</b>	M15280-M15290	<b>30</b>	M15411	<b>43</b>
M14387-M14398	<b>3</b>	M15010-M15012	<b>16</b>	M15291-M15301	<b>30</b>	M15420-M15422	<b>43</b>
M14440-M14451	<b>3</b>	M15014-M15015	<b>16</b>	M15160-M15166	<b>31</b>	M15370-M15380	<b>44</b>
M14452-M14456	<b>3</b>	M15020-M15021	<b>16</b>	M15180-M15186	<b>31</b>	M21787	<b>44</b>
M16101-M16122	<b>4</b>	M15030-M15033	<b>17</b>	M15220-M15226	<b>31</b>	M15520-M15529	<b>45</b>
M16151-M16175	<b>4</b>	M15035-M15038	<b>17</b>	M15200-M15206	<b>32</b>	M15530-M15339	<b>45</b>
M14400-M14403	<b>5</b>	M15044	<b>17</b>	M21813-M21818	<b>32</b>	M21800-M21805	<b>46</b>
M14404-M14407	<b>6</b>	M16001-M16010	<b>18</b>	M21823-M21829	<b>32</b>	M21790-M21799	<b>46</b>
M14420-M14425	<b>6</b>	M16011-M16020	<b>18</b>	M14620-M14634	<b>33</b>	M21721-M21723	<b>47</b>
M14460-M14467	<b>7</b>	MEMT05022- MEMT40022	<b>18</b>	M14720-M14722	<b>33</b>	M22380-22400	<b>47</b>
M14502-M14504	<b>7</b>	M14060-M14079	<b>19</b>	M14760-M14771	<b>33</b>	M21712-M21717	<b>47</b>
M14480-M14489	<b>7</b>	M14040-M14059	<b>19</b>	M14730-M14741	<b>34</b>	M19400-M19433	<b>48</b>
M14490-M14499	<b>8</b>	M14080-M14099	<b>20</b>	M14754-M14759	<b>34</b>	M19412-M19417	<b>48</b>
M14600-M15630	<b>8</b>	M14100-M14119	<b>20</b>	M14742-M14751	<b>34</b>	M19424-M19433	<b>48</b>
M14640-M15682	<b>8</b>	M14120-M14129	<b>21</b>	M14800-M14819	<b>35</b>	M19436-M19444	<b>48</b>
M14530-M14549	<b>9</b>	M14130-M14139	<b>21</b>	M15450-M15460	<b>36</b>	M14782-M14791	<b>49</b>
M14530-M14549	<b>9</b>	M14302	<b>21</b>	M22601-M22604	<b>36</b>	M19452-M19455	<b>49</b>
M14570-M14585	<b>9</b>	M14160-M14165	<b>22</b>	M22590-M22599	<b>36</b>	M19460	<b>49</b>
M21732-M21741	<b>10</b>	M14170-M14175	<b>22</b>	M15330	<b>37</b>	M21830-M21849	<b>50</b>
M14700-M14709	<b>10</b>	M14140-M14145	<b>22</b>	M15331-15335	<b>37</b>	M21850-M21857	<b>50</b>
M14660-M14689	<b>10</b>	M14150-M14155	<b>22</b>	M15337-15339	<b>37</b>	M21861-M21878	<b>50</b>
M14850-M14589	<b>11</b>	M14180-M14195	<b>23</b>	M19012-19015	<b>37</b>	M21892-M21899	<b>50</b>
M14860-M14869	<b>11</b>	M14200-M14215	<b>23</b>	M15033-15054	<b>38</b>	M21892-M21899	<b>50</b>
M14870-M14879	<b>11</b>	M14220-M14235	<b>24</b>	M15058	<b>38</b>		
M14880-M14889	<b>12</b>	M14252-M14263	<b>25</b>	M15060	<b>38</b>		
M14890-M14899	<b>12</b>	M14240-M14251	<b>25</b>	M15065	<b>39</b>		
M14900-M14909	<b>12</b>	M14264-14275	<b>26</b>	M21752-M21756	<b>39</b>		
M14910-M14919	<b>13</b>	M14276-14287	<b>26</b>	M15070-M15076	<b>40</b>		
M14920-M14929	<b>13</b>	M14288-14293	<b>27</b>	M15077-M15083	<b>40</b>		
M14930-M14939	<b>13</b>	M14294-14299	<b>27</b>	M15084-M15089	<b>40</b>		
M14930-M14939	<b>13</b>	M14307-14310	<b>27</b>				

# ALLTEMP

CATALOGUE #2

**ALLTEMP.**



Alltemp Products Co. Ltd.  
2-905 Sandy Beach Rd.

[alltemp.ca](http://alltemp.ca)

