



EQUIPMENT MOUNTING SOLUTIONS

Product Selection Guide

featuring **QUICK-SLING®** Equipment Stands, Brackets and Accessories

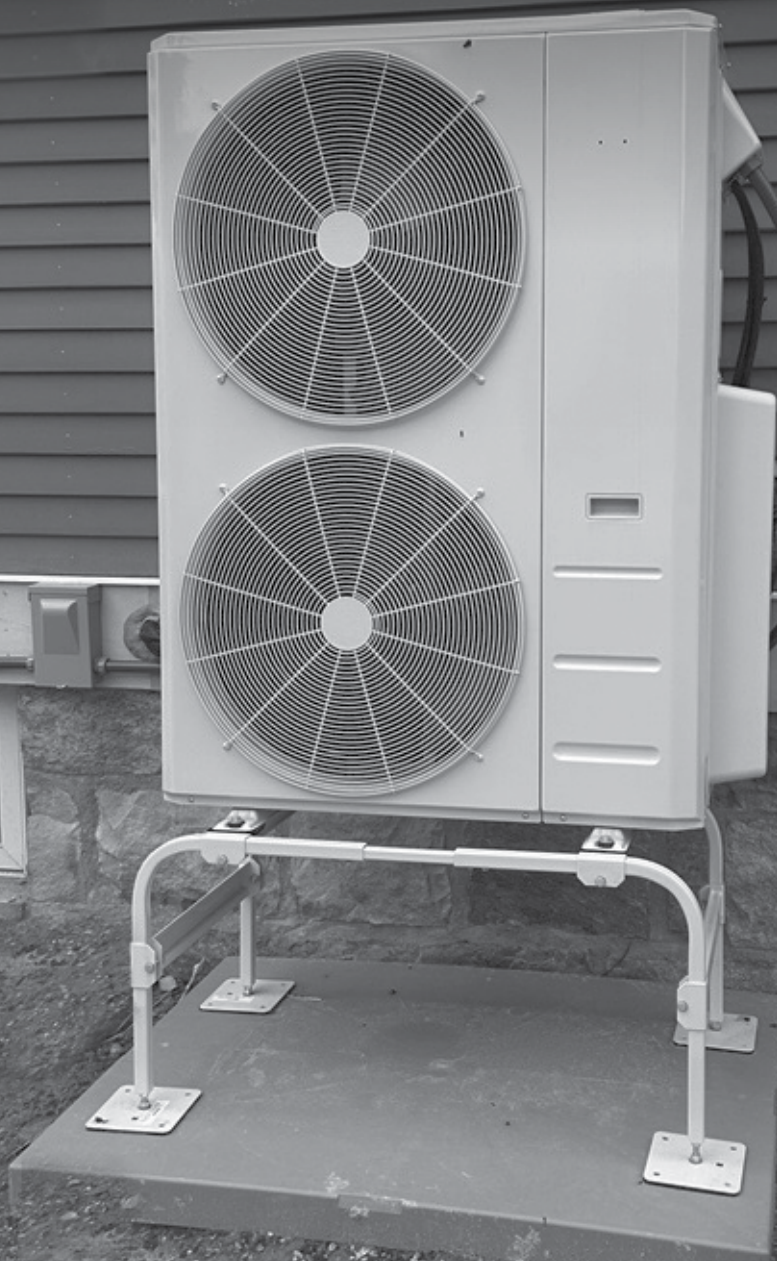




TABLE OF CONTENTS

MINI-SPLIT STANDS	3-8
WALL BRACKETS	9-12
VRF/VRV STANDS	13
AIR HANDLERS & FURNACES	14 - 15
UNIT HEATER SWIVEL BRACKETS	16 - 18
BOILER/TANKLESS WATER HEATER BRACKETS	19
ACCESSORIES	20 - 24
MOUNTING BLOCKS & FEET	25 - 27
HVAC EQUIPMENT PADS	28 - 35



MINI-SPLIT STANDS

Our full line-up of mini-split stands consist of many different sizes, configurations and materials to fit all types of installations, from BASIC offerings to more feature-rich PRO options. They provide a safe, stable platform for mounting ductless condensers and are quicker to install than many alternatives.



QSMS1206




QSMS1201



QSMS1201-PAL

	BASIC	STANDARD	PRO
	Great Value	Hurricane/ Seismic Code Compliant	Ultimate Weather Resistance
MATERIAL	Powder-coated galvanized steel	Powder-coated steel Stainless Steel Option	Powder-coated aluminum
STRENGTH	Heavy-duty steel construction	Heavy-duty steel construction	Lighter than steel with same holding capacity
CORROSION PROTECTION	Excellent corrosion protection	Excellent corrosion protection	Superior corrosion protection; ideal for coastal/harsh environments
APPLICATION OPTIONS	Single Fan Unit	Single Fan Unit Dual Fan Unit Large Cabinet Units Horiz. Air Discharge Units Combo Unit Multi-Unit	Single Fan Unit Dual Fan Unit



Quick-Sling® product lines are OEM recommended and patented for their quality engineering. Developed by an HVAC contractor for HVAC contractors, these innovative products meet federal, state and local building and safety codes. Many of the stands and brackets are hurricane approved by the Florida Building Commission.

If you're ready to save money, time, and headache, turn to Quick-Sling® for your mounting system solution. Don't settle for cheap imitations.

MINI-SPLIT STANDS (CONT.)

With the most robust offering of mini-split stands in the industry, we make it easy to choose the right one for the job, whether it's for a single residential mini-split install or a complex multi-unit commercial project.

Visit the DiversiTech website to use the automated Mounting Selection Tool
<https://www.diversitech.com/resources/mounting-product-selector>

UNITS	EQUIPMENT W X D WEIGHT	HEIGHT	STEEL 1" C-CHANNEL GALVANIZED POWDER-COAT	STEEL TUBE 1" SQUARE POWDER-COAT	STAINLESS STEEL TUBE 1" SQUARE PASSIVATED	STEEL TUBE 1-1/2" SQUARE POWDER-COAT	ALUMINUM TUBE 1" SQUARE POWDER-COAT	STEEL ROD D10MM (0.39") GALVANIZED POWDER-COAT
1	SINGLE 27" x 12.6" -PAL 23" x 17" <400 LBS	12" 18" 24"		QSMS1200 QSMS1800 QSMS2400			QSMS1200-PAL QSMS1800-PAL QSMS2400-PAL	DTS1201
1	SINGLE 27" x 17.1" <400 LBS	12" 18" 24"	QSMS1206 QSMS1806	QSMS1201 QSMS1801 QSMS2401	QSMS1201-SS QSMS1801-SS QSMS2401-SS		QSMS1201-PAL QSMS1801-PAL QSMS2401-PAL	DTS1202 DTS1802
1	DUAL FAN 27" x 25.9" <400 LBS	12" 18" 24"		QSMS1202 QSMS1802 QSMS2402	QSMS1202-SS		QSMS1202-PAL QSMS1802-PAL QSMS2402-PAL	
2	DOUBLE STACK	12" 12"		QSMS1203 QSMS1203-N				
1	HORIZ DISCH 2 RAIL 38" x 25.9" <400 LBS	12" 18" 24"		QSMS1204 QSMS1804 QSMS2404				DTS1203 (32" x 21.5")
1	HORIZ DISCH 3 RAIL 38" x 25.9" <400 LBS	12" 18" 24"		QSMS1205 QSMS1805 QSMS2405				
2	COMBO 2-UNIT 400-900 LBS	12" 18" 24"				QSMS4000-12 QSMS4000-18 QSMS4000-24		
1	SUPER MINI 27.5" x 25.8" 400-900 LBS	12" 18" 24"				QSMS4002-12 QSMS4002-18 QSMS4002-24		
2-6 2-6 2-6 6+ 6+ 6+	MULTI-UNIT EXTENSION	12" 18" 24" 12" 18" 24"				QSMS3001-12 QSMS3001-18 QSMS3001-24 QSMS3001-12EXT QSMS3001-18EXT QSMS3001-24EXT		



QSMS2404



QSMS1205



QSMS4002-12



QSMS1201-SS

BASIC STAND

The Quick-Sling® Basic Mini-Split Stand is powder-coated, electro-galvanized steel mini-split stand that provides a stable platform for mounting ductless condensers. It keeps the unit elevated above lawn mowers, weed trimmers, pets, snow and flooding. It comes with adjustable sturdy nylon feet.

- Made from galvanized steel capable of supporting up to 400 lbs.
- Powder-coated white finish for outdoor use
- Each 4" x 4" foot is made from nylon, and adjustable to enable easy leveling
- Available in 12" and 18" heights
- Includes anti-vibration rubber mounts and all necessary hardware



HEIGHT	MODEL #
12"	QSMS1206
18"	QSMS1806

STANDARD STEEL STAND

The Quick-Sling® Standard Mini-Split Stand provides a heavy duty platform for mounting ductless condensers that is hurricane rated and seismic code compliant.

- Made from 14 gauge steel square tubing capable of supporting up to 400 lbs.
- Powder-coated
- Stainless Steel Option (-SS)
- Available in 3 heights and 2 widths
- Each 6" x 6" foot is made from 8 gauge steel plate with 1.25" of height adjustment
- 0.2" thick 50 durometer rubber pads are pre-installed on the bottom of each foot to reduce vibration
- Includes anti-vibration mounts and all necessary hardware



HEIGHT	MODEL #		
12"	QSMS1200	QSMS1201	QSMS1201-SS
18"	QSMS1800	QSMS1801	QSMS1801-SS
24"	QSMS2400	QSMS2401	QSMS2401-SS

PRO ALUMINUM STAND

The Quick-Sling® aluminum mini-split stand with powder-coated finish provides corrosion resistance in harsh coastal environments.

- Made from 1" square tubing capable of supporting up to 400 lbs.
- Powder-coated aluminum for harsh coastal installations
- Each 6" x 6" foot is made from 8 gauge aluminum plate with 1.25" of height adjustment

HEIGHT	MODEL #	
12"	QSMS1200-PAL	QSMS1201-PAL
18"	QSMS1800-PAL	QSMS1801-PAL
24"	QSMS2400-PAL	QSMS2401-PAL




STEEL ROD STAND

Galvanized welded 10mm steel rod construction capable of supporting up to 400 lbs.

- Powder-coated finish
- Stackable design
- No assembly required
- All necessary hardware provided, including anti-vibration mounts, and pad attachment anchors & screws.

HEIGHT	MODEL #		
12"	DTS1201	DTS1202	DTS1203
18"	DTS1802		

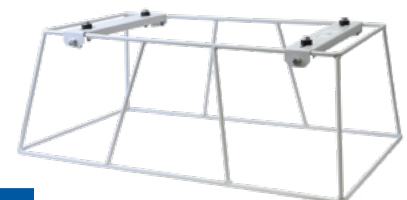

DUAL FAN MINI-SPLIT STANDS

The Quick-Sling® Dual Fan Unit Stand is designed to be extra stable to accommodate the taller dimensions of a dual fan outdoor condensing unit.



- Available in 12", 18" or 24" heights
- 18" and 24" high stands come with additional stabilizer arms
- Made from strong 14 gauge square tubing and 11 gauge steel capable of supporting up to 400 lbs
- 8 points of vibration isolation
- Powder-coated aluminum option (QSMSxx02-PAL)

HEIGHT	MODEL #	
12"	QSMS1202	QSMS1202-PAL
18"	QSMS1802	QSMS1802-PAL
24"	QSMS2402	QSMS2402-PAL

DOUBLE STACK MINI-SPLIT STAND

The Quick-Sling® Double Stack Mini-Split Condensing Unit Stand mounts two single fan mini-split condensing units one above the other. This allows for two systems to only take up the footprint of a single system, reducing the overall installation space required.

- Made from strong 14 gauge square tubing
- Each 6" x 6" foot is made from 11 gauge steel and is adjustable up to 1.25" in height
- Four 3/8" holes allow the stand feet to be easily secured to any surface
- 50 durometer rubber pads are pre-installed on each foot to reduce vibration
- Rubber washers are provided to create four points of anti-vibration isolation for each mounting shelf
- All necessary hardware is included
- Holds total of 400 lbs. - 600 lbs. on the bottom shelf and 200 lbs on the top shelf Each stand comes with two offset mounting arms slotted to fit most all single fan outdoor mini-split units. The offset mounting arms allow heat pumps to be staggered to ensure the top unit does not drip on the bottom.
- Narrow version (-N) available with over/under configuration

HEIGHT	MODEL #
12"	QSMS1203
12"	QSMS1203-N



QSMS1203

SUPER MINI-SPLIT STAND

The Super Mini-Split Stand accommodates larger units up to 900 pounds. Made from heavy duty 1-1/2" square steel tube and large 12" x 12" square feet.

HEIGHT	MODEL #
12"	QSMS4002-12
18"	QSMS4002-18
24"	QSMS4002-24




QSMS4002-12

COMBO MINI-SPLIT STAND

The Combo Unit Stand accommodates two single or double outdoor mini-splits. Ideal for rooftop installations. Made from heavy duty 1-1/2" square tubing and large 12" x 12" square feet.

- Constructed of 1-1/2" 11 gauge steel tubing and 11 gauge steel rails
- Available in 12", 18" & 24" height
- Holds up to 900 lbs.
- 12" x 12" 7 gauge feet for ground or roof mounting
- Two 1/2" holes in each foot to secure the stand

HEIGHT	MODEL #
12"	QSMS4000-12
18"	QSMS4000-18
24"	QSMS4000-24




QSMS4000-18

MINI-SPLIT MULTI-UNIT SUPER STANDS

The Quick-Sling® Mini-Split Multi-Unit Super Stand® accommodates up to six outdoor mini-split condensing units on a single stand. With the addition of the extender kits, condensing units can be added in increments of two per kit.

- Constructed of 1-1/2" 11 gauge steel tubing and 11 gauge steel rails
- 12" x 12" 7 gauge feet for ground or roof mounting
- Two 1/2" holes in each foot to secure the stand
- Available in 12", 18" and 24" heights




HEIGHT	BASE STAND	EXTENDER KIT
12"	QSMS3001-12	QSMS3001-12EXT
18"	QSMS3001-18	QSMS3001-18EXT
24"	QSMS3001-24	QSMS3001-24EXT


FLEXI FRAME EQUIPMENT STANDS

The galvanized steel Flexi Frame is a strong weather-resistant stand for mounting mini-splits and VRF equipment. The Flexi Frame can be configured with a base on multiple extensions to meet most application requirements.

- Finish: 1.6" square galvanized steel beams and crossbars
- Legs: 1.9" diameter steel tube with M24 stud adjuster and thick U-clevis
- Standard height adjustable from 12 to 16" Ext. Leg
- FF-L1621 for 16 to 21" sold separately
- Feet: 12.6" square polypropylene design with integral rubber mat



FF-BF-B

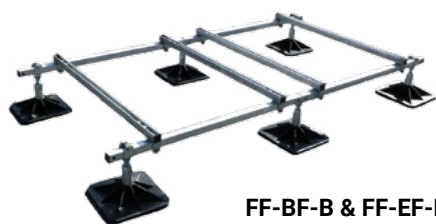

FF-BF-B & FF-EF-B

MODEL #	DESCRIPTION
FF-BF-B	Flexi Base Frame, 47-1/4" Rail
FF-EF-B	Flexi Extension Frame, 47-1/4" Rail
FF-BF-1500-B	Flexi Base Frame, 59" Rail
FF-EF-1500-B	Flexi Extension Frame, 59" Rail
FF-L1621	Flexi Frame Leg, 16-21" Tall Ext (2/PK)

ALUMINUM EQUIPMENT STAND

The Aluminum Equipment Stands accommodate one or more outdoor mini-split condensing units. Mounting rails are adjustable and the stands use captive fasteners for quick and secure equipment mounting. Extensions can be added to a base to mount multiple units on a single stand.

HEIGHT	BASE STAND	EXTENSION STAND	APPLICATION
14"	QSTD1403-AL	QSTD1403-ALX	Mini-Split Outdoor Equipment
	QSTD1404-AL	QSTD1404-ALX	Traditional Split Systems or Two Fan Mini-Split
24"	QSTD2403-AL	QSTD2403-ALX	Mini-Split Outdoor Equipment
	QSTD2404-AL	QSTD2404-ALX	Traditional Split Systems or Two Fan Mini-Split



QSTD1403-AL



QSTD1403-ALX

MINI-SPLIT WALL BRACKETS

The Quick-Sling® line of Wall Brackets provides a quick, safe and stable means to mount an outdoor mini-split unit to multiple types of wall structures. Designed to allow the equipment manufacturer's recommended clearance for proper airflow.

Heavy Duty, Flat Wall Mounting Bracket



QSWB1000

- Made from powder-coated 11 gauge steel square tubing with 500 lbs. capacity
- Four points of anti-vibration with 50 durometer rubber washers
- The QSWB1000 "L" brackets can be mounted in either the up-and-out or down-and-out orientation
- Mounting shelf is 26" in depth and pre-slotted for quick unit mounting
- Includes galvanized mounting hardware

Flat or Siding Wall Mounted Bracket



QSWB2000
QSWB4000

- Made from powder-coated 14 gauge steel with 350 lbs. load capacity
- Includes slider mounting track for mounting to standard wall studs
- Six points of vibration isolation with 50 durometer rubber washers
- Adjustable to 34" in width
- QSWB4000 is made from 11 gauge steel and can hold up to 500 lbs
- Both models are available in stainless steel (QSWB2000SS / QSWB4000SS)
- Hurricane-rated Wall Brackets
- All necessary hardware included

WALL TYPE	WEIGHT CAPACITY	MODEL #
Flat Concrete	500 lbs.	QSWB1000
Any	350 lbs.	QSWB2000
Any	500 lbs.	QSWB2000SS
Any	500 lbs.	QSWB4000
Any	500 lbs.	QSWB4000SS
Any	500 lbs.	QSWB1100

Heavy Duty, Flat Wall or Wall Stud Mounted Bracket



QSWB1100

- Made from powder-coated 11 gauge steel square tubing with 500 lbs. capacity
- Includes two slider mounting tracks for mounting to standard wall studs
- Four points of anti-vibration with 50 durometer rubber washers
- The "L" brackets can be mounted in either the up-and-out or down-and-out orientation
- Mounting shelf is 26" in depth and pre-slotted for quick unit mounting
- Includes galvanized mounting hardware

MINI-SPLIT WALL BRACKETS (CONT.)

The Quick-Sling® line of Wall Brackets provides a quick, safe and stable means to mount an outdoor mini-split unit to multiple types of wall structures. Designed to allow the equipment manufacturer’s recommended clearance for proper airflow.

Concrete Foundation Mounted Bracket



QSWB3000

- Made from powder-coated 11 gauge steel square tubing
- 300 lbs. load capacity
- Four points of anti-vibration with 50 durometer rubber washers
- 19" shelf depth, plus 7" of clearance from Z bend allows ample space between wall and equipment
- Reduces potential vibration through walls

WALL TYPE	WEIGHT CAPACITY	MODEL #
Foundation	300 lbs	QSWB3000

Light Duty, Aluminum Wall Bracket

The Hef-T-Bracket™ line of wall brackets are used to securely support condensing units on to a wall. Available in a variety of sizes and materials.



230-A2S

- Lightweight aluminum alloy construction with 220 lbs. capacity
- Polyester epoxy resin protective coating
- Includes slider mounting track for mounting to standard 12" or 16" wall studs
- Fits most units up to 1-ton AC capacity
- Installation hardware included

WALL TYPE	WEIGHT CAPACITY	MODEL #
Any	220 lbs.	230-A2S

MINI-SPLIT WALL BRACKETS (CONT.)

Top Hinged, Med and Large Galvanized Steel Bracket

- Quick and easy installation
- Features a cross bar that is attached to the wall, and two L-shaped brackets that are hooked and bolted into place on the cross bar
- Fastened using the bolts and anti-vibration washers provided
- Electro-galvanized, powder-coated steel plate material
- Spirit level included
- Patented top hinge ensures unit can be easily leveled on any type of wall surface
- For use with single fan outdoor units up to 500 lbs.

WALL TYPE	WEIGHT CAPACITY	MODEL #
Any	500 lbs.	230-B2M
Any	500 lbs.	230-B2L
Any	500 lbs.	230-B2XL
Any	500 lbs.	230-B3M
Any	500 lbs.	230-B3L

Med, Large and Extra Large Galvanized Steel Bracket

- Quick and easy installation
- Features a cross bar that is attached to the wall, and two L-shaped brackets that are hooked and bolted into place on the cross bar
- Fastened using the bolts and anti-vibration washers provided
- Electro-galvanized, powder-coated steel plate material
- Spirit level included
- Extra long arms to provide additional clearance between wall and unit (230-B2XL)
- For use with single fan outdoor units up to 500 lbs.



230-B2M / 230-B2L



230-B2XL



230-B3M



230-B3L

UNITARY A/C WALL BRACKETS

Air Conditioner Brackets are used for hanging A/C condensers and heat pumps to the side of a home or building. Installing these brackets avoids time lost waiting for finished grade or landscaping. Available in 10-gauge powder-coated steel or aluminum. Supports up to 600 lbs.

- Load rating of 600 lbs. per pair
- (2) brackets included with item number
- Avoids time lost waiting for finished grade or landscaping prior to installation of AC unit
- Pre-punched 7/16" holes for easy installation to wall structure. Pre-punched 15/64" holes for equipment mounting
- Mount at any height to allow for easy maintenance under units

POWER-COATED STEEL

- The ACB line of wall brackets are Approved by the Florida Building Commission and are High Velocity Hurricane Zone (HVHZ) approved
- Made of heavy duty 10 ga. (9/64" thick) steel and powder coated grey finish for added durability

MODEL #			
30"	36"	42"	48"
ACB-30	ACB-36	ACB-42	ACB-48



ACB-42

ALUMINUM

- Made of heavy duty aluminum, excellent for coastal and other harsh environments

MODEL #			
30"	36"	42"	48"
ACB-30-AL	ACB-36-AL	ACB-42-AL	ACB-48-AL



ACB-42-AL

VRF/VRV SUPER STANDS

The Quick-Sling® Super Stands® are designed to provide a strong and stable mounting platform for most all brands of VRF/VRV outdoor units. Super Stands come partially assembled to make installation quick and easy. Most all application configurations can be accomplished with only 9 single unit base item numbers and 9 extensions item numbers making selecting the correct stand quick and easy.

- Main supports are made from 11 gauge, 1-1/2" steel square tubing
- Super Stands are modular and can accommodate a single unit or multi-unit configurations
- Super Stand feet are 12" x 12" 7 gauge steel with 3/8" holes for optional mounting
- Plastic feet are available for use in non-penetrating applications
- Adjustable depth and mounting slots will fit most all equipment mounting holes configurations
- Super Stands are approved by the Florida Building Commission for use in High Velocity Hurricane Zones
- Three cross rail sizes allow for hundreds of unique size combinations to meet most any application need
- Rated for use in seismic applications
- Capable of being installed on rubber roofs for non-penetrable applications or secured to roof structure when required
- Available in 12", 18" or 24" heights



SLIDING RAIL DESIGN



EXTENSION KIT



MOUNTING SLOTS

STAND HEIGHT	BASE SINGLE UNIT STANDS			EXTENSIONS		
	MOUNTING RAIL LENGTH			MOUNTING RAIL LENGTH		
	48"	62"	74"	48"	62"	74"
12"	QSSB48-12	QSSB62-12	QSSB74-12	QSSX48-12	QSSX62-12	QSSX74-12
18"	QSSB48-18	QSSB62-18	QSSB74-18	QSSX48-18	QSSX62-18	QSSX74-18
24"	QSSB48-24	QSSB62-24	QSSB74-24	QSSX48-24	QSSX62-24	QSSX74-24

Hurricane and Seismic Rated



QSSB48-18

AIR HANDLER STANDS

VERTICAL AIR HANDLER STANDS

Quick-Sling® Vertical Air Handler Stands are built strong and stable and are adjustable to fit most all manufacturers products.

- Adjustable left to right in 1" increments up to 6"
- The 18" and 24" stands include 2 stabilizer arms for additional support
- Each stand has a 500 lbs load capacity
- Each 11 gauge 6" x 6" foot has pre-drilled holes to accept 1/4" hardware to mount to supporting structure
- Stand is constructed of 14 gauge square steel tubing



ARM WIDTH	12" STAND HEIGHT	18" STAND HEIGHT	24" STAND HEIGHT
19"	–	QSTD5000	QSTD6000
23"	–	QSTD5001	–
27"	QSTD4002	–	QSTD6002



MODEL #	STAND DIMENSIONS			WEIGHT (LBS.)	MOUNTING DIMENSIONS	
	L (IN.)	W (IN.)	H (IN.)		WM. (IN.)	DM. (IN.)
QSAH1000-18	22.7	16.2-26.2	18.0	13.6	16.0-26.0	0 - 32
QSAH1000-24	22.7	16.2-26.2	24.0	15.7	16.0-26.0	0 - 32

HORIZONTAL AIR HANDLER STAND

The QSTD Horizontal Air Handler Stand provides faster installation and accommodates a drain pan (not included).

- Standard Duty Stand is adjustable in 3 directions.
Made of 14 gauge steel and can hold 500 lbs

APPLICATION	MODEL #	WEIGHT CAPACITY
Standard Duty	QSTD1000	500 lbs



HANGING BRACKETS

The original Quick-Sling® Hanging Bracket provides a quick, safe and solid platform to mount air handlers and furnaces.

- Solid, 14 gauge steel square tube construction
- Stable, non-swinging platform
- Custom mounting hardware included
- 3-dimensional adjustment
- 400 lbs. max capacity
- Includes vibration isolation pads and washers

APPLICATION	MODEL #	WEIGHT CAPACITY
Standard Duty	QSLG2000	400 lbs.



UNIT HEATER SWIVEL BRACKETS

The Quick-Sling® line of Unit Heater Swivel Brackets are uniquely designed to provide fast and easy installation of most all ceiling mounted Unit Heaters. The innovative swivel design allows for 360° rotation for setting the perfect air flow direction prior to hard piping the unit. Multiple ceiling mounting options adapt to various installation applications.



QSWI3000

Flush Mount "H" Bracket

SWIVEL BRACKET STYLE	MOUNTING BOLT LOCATIONS	"U" CEILING MOUNT	FLUSH CEILING MOUNT
"H" Bracket	4	QSWI1000	QSWI3000
"I" Bracket	2	QSWI2000	QSWI4000, QSWI4001
36" Spreader Plate	4	—	QSWI3001
17" Spreader Plate	4	—	QSWI3002
Heavy Duty "I" Bracket	2	—	QSWI5001
Heavy Duty "I" Bracket Lrg	2	—	QSWI5002
Heavy Duty "H" Bracket Lrg	4	—	QSWI5003
Dual "I" Bracket	4	—	QSWI6000



QSWI1000

"U" Mount, "H" Bracket



QSWI6000



QSWI5001



QSWI5003

UNIT HEATER SWIVEL FLUSH MOUNT W/"H" BRACKET

- 12 points of anti-vibration isolation
- Flush ceiling mount installs on flat roofs and is slotted to receive 3/8" lag bolts at either 16" or 24" on center
- Can be mounted either parallel or perpendicular to joist
- QSWI3001 comes with 36" spreader plate and 36" equipment connection arms and able to hold up to 200 lbs. Perfect for most ducted air handlers
- QSWI3002 comes with a 17" spreader plate and 36" equipment connection arms and able to hold up to 200 lbs
- Constructed from 14 gauge steel
- 200 lbs. capacity



**QSWI3000 / QSWI3001
QSWI3002 / QSWI4000**

w/"H" Bracket
(QSWI3000 / QSWI3001 / QSWI3002)
w/"I" Bracket
(QSWI4000)

UNIT HEATER SWIVEL "U" MOUNT W/"H" OR "I" BRACKET


- "U" ceiling mount installs on flat or pitched roofs and installs as high as 19.5" or as low as 27.5"
- QSWI1000 comes with two equipment mounting arms for 4 point mounting configuration
- QSWI2000 comes with a single equipment mounting arm for a 2 point mounting configuration
- Hanging arms attach to wood using 2 zip screws and a 4" through bolt for security. Optional steel beam adapters are also available
- Each extension arm individually adjusts in 1" increments
- Constructed from 14 gauge steel
- 200 lbs. capacity



QSWI1000 / QSWI2000

w/"H" Bracket (QSWI1000)
w/"I" Bracket (QSWI2000)

UNIT HEATER SWIVEL FLUSH MOUNT HEAVY DUTY

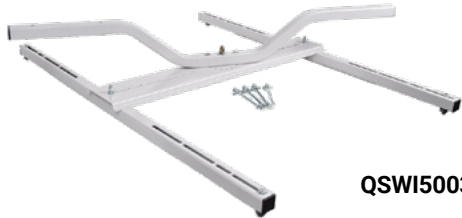

QSWI5003



QSWI5001

- Heavy duty mounting plate is designed to fit most large unit heaters up to 400 lbs.
- Flush ceiling mount installs on flat roofs and is slotted to receive lag bolts at either 16" or 24" on center
- Can be mounted either parallel or perpendicular to joist

BRANCH CIRCUIT CONTROLLER SWIVEL FLUSH MOUNT W/2 "I" BRACKETS



QSWI6000

- Dual flush mounts with "I" bracket
- Flush ceiling mount installs on flat roofs and is slotted to receive 3/8" lag bolts at either 16" or 24" on center
- Can be mounted either parallel or perpendicular to joist
- 400 lbs. capacity

BOILER/TANKLESS WATER HEATER BRACKETS

The Quick-Sling® Boiler Bracket is compatible with most wall hung boilers and tankless water heaters.

- Flexible mounting options
- Adjustable to fit most wall mounted boilers/tankless water heaters
- Made from strong powder-coated steel
- Partially assembled to make installation fast & easy



QSBB3000




QSBB4000

WALL TYPE	WEIGHT CAPACITY	MODEL #
Floor	350 lbs.	QSBB4000
Wall	350 lbs.	QSBB3000

ACCESSORIES

VIBRATION ISOLATION STRIPS FOR MINI-SPLIT & VRF/VRV

These high-density elastometric-coated, molded and pre-compressed fiberglass strips are UV resistant and designed to provide vibration isolation and allow controlled movement in the fiber media.

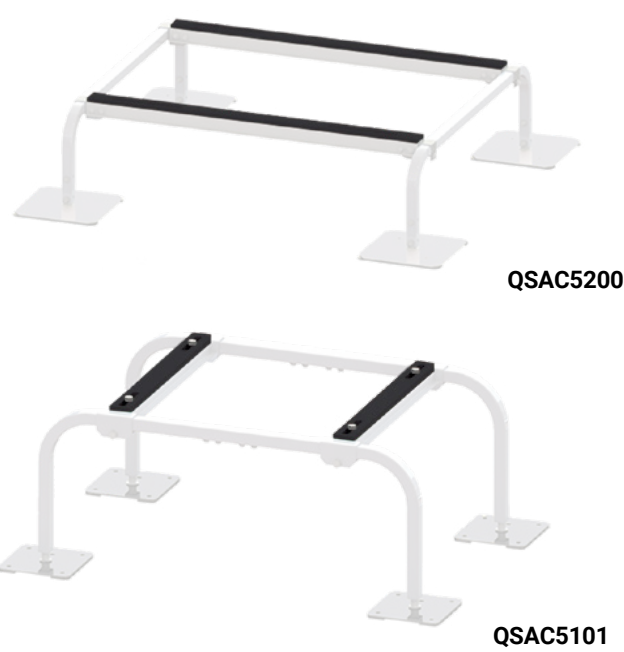

MODEL #	FOR USE WITH		
QSAC5100	QSMS1200	QSMS1800	QSMS2400
QSAC5101	QSMS1201	QSMS1801	QSMS2401
QSAC5102	QSMS1202	QSMS1802	QSMS2402
QSAC5104	QSMS1204	QSMS1804	QSMS2404
QSAC5105	QSMS1205	QSMS1805	QSMS2405
QSAC5200	QSSB48-**	QSSX48-**	
QSAC5201	QSSB62-**	QSSX62-**	
QSAC5202	QSSB74-**	QSSX74-**	

** Denotes multiple models & sizes

VIBRATION ISOLATION KITS

These rubber isolators are ideal for reducing vibration and noise for equipment mounted on any stand or wall bracket.

QUICK-SLING		VIBRATION ISOLATOR DIMENSIONS				
Item #	D (in.)	H (in.)	L (in.)	Load/4PK	UOM	Isolator Qty
QSAC6001	1.18	0.79	0.79	0-400 lbs	PK	4
QSAC6002	1.57	1.57	0.79	0-620 lbs	PK	4



SNOW SHIELD / ROOF BRACKET

The Quick-Sling® Snow Shield Roof Bracket mounts to Quick-Sling brackets and stands QSWB3000 or the QSMS1200, 1201, 1202, 1800, 1801, 1802, 2400, 2401, 2401 protecting the equipment from snow and freezing rain.

- Designed to ensure proper airflow around equipment
- Roof made from durable, UV protected twin wall plastic
- Constructed of powder-coated 14 gauge steel
- Assembles in minutes

ITEM #	DESCRIPTION
QSRB1000	Quick-Sling® Roof Bracket for Mini-Split Stands




QSRB1000

WEATHERSHIELD® ROOF COVER

The Quick-Sling® WeatherShield® shields and protects outdoor ductless condensing units from weather damage. Quick-Sling WeatherShield mounts directly to the mini-split and fits most sizes of equipment.

- Mounts directly to the outdoor unit
- Mounting hardware included
- Adjustable to fit the most popular mini-split sizes
- Quick and easy to install
- Strong, UV protected roof material

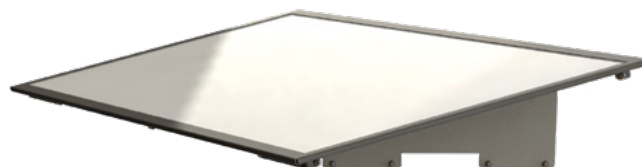

QSW1000



ITEM #	DESCRIPTION
QSW1000	Quick-Sling® Weathershield™ Roof Cover for Mini-Split Units

ANTI-VIBRATION PADS

DiversiTech's line of Anti-Vibration Pads provide noise, shock and vibration isolation generated by mechanical equipment. Multiple design options are available to match specific application needs.


PRODUCT	PSI CAPACITY	SIZE RANGE	MATERIAL	AVAILABLE THICKNESSES
EVA	50	2" x 2" - 18" x 18"	Composite Foam and Styrene Butadiene Rubber	7/8"
Iso-Cube	180	2" x 2" - 18" x 18"	Natural Rubber	3/4"
Rubber	50	2" x 2" - 18" x 18"	Natural Rubber	3/8"
Rubber/ Cork	50	2" x 2" - 18" x 18"	Natural Rubber and Cork	7/8"

EVA ANTI-VIBRATION PADS

The latest generation in vibration dampening technology. The most effective vibration dampening pad available on the market. The E.V.A. Pad was tested against other pads at four different vibration settings. In the most severe vibration extremes, the E.V.A. Pad outperforms cork and rubber by a margin of greater than 3:1! This is due to the special composite foam center which is much more structurally sound than cork. It is not affected by oils or chemicals that can break down cork and is much more effective at vibration dampening than solid rubber. All this at a very competitive price. Designed to withstand 50 PSI.

- E.V.A. outperforms cork & rubber 3:1
- Special composite foam center is structurally more sound than cork
- Not affected by oils or chemicals that break down cork
- More effective at vibration dampening than solid rubber

ITEM #	DESCRIPTION	STD. PACK
MP-2E	2" x 2" x 7/8" E.V.A.	48
MP-3E	3" x 3" x 7/8" E.V.A.	36
MP-4E	4" x 4" x 7/8" E.V.A.	24
MP-6E	6" x 6" x 7/8" E.V.A.	24
MP-12E	12" x 12" x 7/8" E.V.A.	12
MP-18E	18" x 18" x 7/8" E.V.A.	6



MP-4E

ISO-CUBE ECONOMY ANTI-VIBRATION PADS

Natural rubber pads, designed to reduce vibration and noise emanating from refrigeration and air conditioning equipment. The circular design in each pad offers a suction cup effect, which eliminates the need to bolt the pads down. A standard 18" (46cm) pad is divided into eighty-one 2" (5cm) segments, each of which may be cut or torn to provide smaller pads. These 50 durometer pads will withstand a load of 180 PSI with greater resiliency.



ISO-4

ITEM #	DESCRIPTION	STD. PACK
ISO-2	2" x 2" x 3/4" Iso-Cube	24
ISO-4	4" x 4" x 3/4" Iso-Cube	12
ISO-18	18" x 18" x 7/8" Iso-Cube	6

- Natural rubber pads designed to reduce vibration & noise emanating from refrigeration or AC systems
- Circular design creates suction cup effect reducing the need to bolt the pads down
- The 50 durometer pads will withstand a load of 150 PSI

RUBBER ANTI-VIBRATION PADS

The rubber pads are corrugated on both sides to reduce vibration and noise. Designed to withstand 50 lbs PSI.

Ideal for air conditioners, compressors, cooling towers, presses, machines or anywhere vibration control is needed. Elastomeric oil resistant.



MP-3


ITEM #	DESCRIPTION	STD. PACK
MP-2	2" x 2" x 3/8" Rubber	48
MP-3	3" x 3" x 3/8" Rubber	36
MP-4	4" x 4" x 3/8" Rubber	24
MP-6	6" x 6" x 3/8" Rubber	24
MP-8	8" x 8" x 3/8" Rubber	12
MP-12	12" x 12" x 3/8" Rubber	12
MP-18	18" x 18" x 3/8" Rubber	6

- Solid rubber construction
- Corrugated on both sides

RUBBER/CORK ANTI-VIBRATION PADS

The cork is laminated between two corrugated pads to reduce vibration and noise. designed to withstand 50 lbs PSI.

Ideal for air conditioners, compressors, cooling towers, presses, machines or anywhere vibration control is needed. Elastomeric oil resistant.



MP-4C

ITEM #	DESCRIPTION	STD. PACK
MP-2C	2" x 2" x 7/8" Rubber/Cork	48
MP-3C	3" x 3" x 7/8" Rubber/Cork	36
MP-4C	4" x 4" x 7/8" Rubber/Cork	24
MP-6C	6" x 6" x 7/8" Rubber/Cork	24
MP-12C	12" x 12" x 7/8" Rubber/Cork	12
MP-18C	18" x 18" x 7/8" Rubber/Cork	6

- Highest quality elastomeric oil-resistant padding
- Corrugated on both sides and laminated to cork center

WOOD JOIST ADAPTERS

FEATURES

- Made of steel and are 12" long and 2" wide
- Each wood adapter can hold 200 lbs each
- The 1.5" bend simply clips over the wood joist
- All necessary hardware is included



QSAC2100 / QSAC2000

PRODUCT	QTY OF 2	QTY OF 4
Wood Joist Adapters	QSAC2100	QSAC2000
Use with	QSWI1000	QSLG2000 QSWI2000

STEEL BEAM ADAPTERS

The Quick-Sling® steel and wood adapters make it easy to mount Quick-Sling units on wood joists.

FEATURES

- Made of aluminum and able to hold up to 250 lbs each
- Slotted to receive 3/8" threaded rod or C-Clamps
- Designed to overcome the obstacle of attaching to steel beams
- All necessary hardware is included



QSAC1100 / QSAC1000

PRODUCT	QTY OF 2	QTY OF 4
Steel Beam Adapters	QSAC1100	QSAC1000
Use with	QSWI1000	QSLG2000 QSWI2000

ONE PIECE HEAT PUMP RISERS

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The one piece, heavy duty plastic unit is manufactured in three heights. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.

ITEM #	DESCRIPTION	STD. PACK
HPR-3	Riser - 3"	48
HPR-3BL	Riser - 3", Black	48
HPR-6	Riser - 6"	36
HPR-6BL	Riser - 6", Black	36
HPR-12	Riser - 12"	16



HPR-6

TWO PIECE HEAT PUMP RISERS

Sturdy and stable, DiversiTech's Heat Pump Riser provides the desired elevation for condensers, heat pumps, and air handlers. The two piece, heavy duty plastic unit is manufactured in two heights and an extension. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise.

ITEM #	DESCRIPTION	STD. PACK
HPR-3-2P	Two Piece Riser - 3"	32
HPR-6-2P	Two Piece Riser - 6"	16
HPR-3-2PG	Two Piece Black Riser - 3"	32
HPR-6-2PG	Two Piece Black Riser - 6"	16
HPR-EXT	4" Extension	28



HPR-6-2PG

ADJUSTABLE EQUIPMENT RISERS

Adjustable equipment risers easily adjust up or down as needed to secure equipment at the correct height. The large center barrel twists up from starting height of 5" to a max of 8". A separate top cap allows for raising or lowering the riser even with equipment already on it. Convenient height markings provided for reference.

ITEM #	DESCRIPTION	STD. PACK
AER-8	Adjustable Equipment Riser - 8"	4
AER-8BL	Adjustable Equipment Riser - 8" Black	4



AER-8

HEF-T-BLOCK™

Used as mounting bases when condensing units must be bolted down. Available in three lengths. Furnished complete with end caps and mounting bolts. Maximum load capacity is 440 pounds per mounting block. Installation temperature range from -4°F (-20°C) to 140°F (60°C). Hef-T-Blocks fit all mini-split condensing units with a unique sliding rail feature.





230-MB17W

ITEM #	DESCRIPTION	STD. PACK
230-MB14W	14" Hef-T-Block (White) w/End Caps	2
230-MB17W	17" Hef-T-Block (White) w/End Caps	2
230-MB36W	36" Hef-T-Block (White) w/End Caps	2
230-MBCW	Hef-T-Block Replacement End Cap (White)	25

HEF-T-FOOT™

The Hef-T-Foot™ is used to support small pipework, runs of cable tray, or to support condensing units, air source heat pumps or a variety of outdoor equipment. The Hef-T-Foot with strut comes in four lengths - 9.8", 15.7", 23.6", 39.4", and regular (6.3") and narrow (4.3") width options. They are red from heavy duty recycled rubber and come complete with .8" x 1.6" aluminum strut adhered to the rubber with industrial adhesive. The Hef-T-Foot Mini-Split Installation Kits provide a complete solution for ground mounting an outdoor mini-split unit. The Kit comes with two rubber feet with strut plus the hardware required to secure the outdoor unit to the feet.

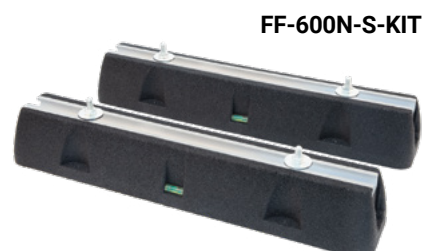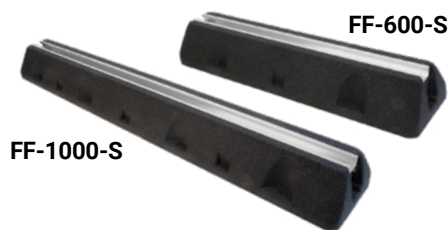

ITEM #	DESCRIPTION	STD. PACK
FF-250-S	Hef-T-Foot™ - 9.8", with 1.6" x .8" strut	1
FF-250-UNI	Hef-T-Foot™ - 9.8", Universal	1
FF-450-S	Hef-T-Foot™ - 17.7", with 1.6" x .8" strut	1
FF-600-S	Hef-T-Foot™ - 23.6", with 1.6" x .8" strut	1
FF-1000-S	Hef-T-Foot™ - 39.4", with 1.6" x .8" strut	1
FF-450-S-KIT	Hef-T-Foot™ Install Kit - Pair of FF-450-S with Hardware	1
FF-450N-S-KIT	Hef-T-Foot™ Narrow Install Kit - Pair of FF-450N-S with Hardware	1
FF-600-S-KIT	Hef-T-Foot™ Install Kit - Pair of FF-600-S with Hardware	1
FF-600N-S-KIT	Hef-T-Foot™ Narrow Install Kit - Pair of FF-600N-S with Hardware	1
FF-1000-S-KIT	Hef-T-Foot™ Install Kit - Pair of FF-1000-S with Hardware	1
HDK-HEFTFOOT	Replacement Hardware Kit (4 bolts, 4 nutplates, 4 washers)	1

BASE PADS

- Used as a mounting base when condensing units must be bolted down
- Maximum load capacity is 220 lbs. per pad
- Sliding rail design for easy and fast installation
- Includes mounting bolts
- Sold in pairs

ITEM #	DESCRIPTION	STD. PACK
230-BP17W	17" Base Pad	10



230-BP17W

H-FRAME KITS


- Ideal for supporting ducts, pipes and electrical equipment
- Kits include a pair of feet, brackets and hardware
- 12.5" square feet available

ITEM #	DESCRIPTION	STD. PACK
F-HF-320	H-Frame Kit - 12.5"	10



F-HF-320

Struts not included



HVAC EQUIPMENT PADS


DiversiTech offers the industry's widest selection of pads for HVACR equipment and various other types of equipment. Plastic, concrete and anti-vibration pads are available.

Proven – We made our name in the industry as the premier supplier of HVAC equipment pads over four decades ago and we continue as the market leader today.

All Types – We have all sizes of pads in all forms to meet your exact needs, the widest selection in the industry by far!

Durable – Proven durability with each pad uniquely engineered using different ribbing patterns, thicknesses and depths, as well as base materials for maximum strength and minimum weight.

Simple – Installing DiversiTech pads is easy! Simplify Your Work™!

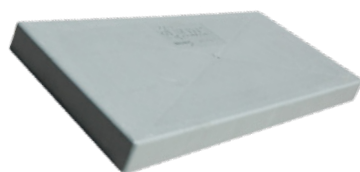

E LITE®



ECOPAD™



ULTRALITE®



CLADLITE®



HUNKLITE™



HEAT PUMP PAD™



THE HURRICANE PAD®

Wind Tables: Visit diversitech.com

E LITE[®] PAD

The most popular plastic DiversiTech pad due to its outstanding durability, uniform strength, and low weight.



- Made in the USA
- Unaffected by UV or weather
- Uniform and generous ribbing provide self-leveling ground support without inserts
- ASTM D2299, ASTM C67

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EL2424-2	24 x 24 x 2	840 lbs	44	7 lbs
EL2436-2	24 x 36 x 2	960 lbs	24	9 lbs
EL2626-2	26 x 26 x 2	1080 lbs	24	11 lbs
EL3030-2	30 x 30 x 2	920 lbs	24	8 lbs
EL3036-2	30 x 36 x 2	1080 lbs	24	11 lbs
EL3232-2	32 x 32 x 2	1200 lbs	24	13 lbs
EL3434-2	34 x 34 x 2	1260 lbs	24	14 lbs
EL3636-2	36 x 36 x 2	1160 lbs	24	13 lbs
EL3434-2	34 x 48 x 2	1240 lbs	24	14 lbs
EL3636-2	36 x 36 x 2	1320 lbs	24	16 lbs
EL3640-2	36 x 40 x 2	1400 lbs	24	18 lbs
EL3648-2	36 x 48 x 2	1560 lbs	24	19 lbs
EL3842-2	38 x 42 x 2	1480 lbs	24	19 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EL1838-3	18 x 38 x 3	1000 lbs	32	16 lbs
EL2424-3	24 x 24 x 3	840 lbs	16	12 lbs
EL2436-3	24 x 36 x 3	1080 lbs	16	19 lbs
EL2448-3	24 x 48 x 3	1320 lbs	32	14 lbs
EL3030-3	30 x 30 x 3	1080 lbs	16	20 lbs
EL3232-3	32 x 32 x 3	1160 lbs	16	21 lbs
EL3244-3	32 x 44 x 3	1400 lbs	16	30 lbs
EL3636-3	36 x 36 x 3	1320 lbs	16	28 lbs
EL3640-3	36 x 40 x 3	1400 lbs	16	31 lbs
EL3648-3	36 x 48 x 3	1560 lbs	16	36 lbs
EL3842-3	38 x 42 x 3	1480 lbs	16	33 lbs
EL3870-3	38 x 70 x 3	2040 lbs	16	36 lbs
EL4040-3	40 x 40 x 3	1480 lbs	16	34 lbs
EL4558-3	45 x 58 x 3	1940 lbs	16	33 lbs
EL4848-3	48 x 48 x 3	1800 lbs	16	36 lbs
EL5042-3	50 x 42 x 3	1720 lbs	16	28 lbs
EL5060-3	50 x 60 x 3	2080 lbs	16	40 lbs
EL5070-3	50 x 70 x 3	2280 lbs	16	47 lbs
EL5252-3	52 x 52 x 3	1960 lbs	16	48 lbs
EL5658-3	56 x 58 x 3	2160 lbs	16	43 lbs

ECOPAD™

The EcoPad™ is made from injection molded plastic, and the application is mainly as a base pad for ground supported equipment. Where local codes supersede the national code and require a pad thicker than 2", use a 3" thick pad.



- Durable and lightweight for standard applications
- Made in the USA
- Unaffected by UV or weather
- ASTM D2299, ASTM C67
- Individually engineered ribbing for cost-effective self-leveling ground support

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EP2424-2	24 x 24 x 2	840 lbs	24	7 lbs
EP2436-2	24 x 36 x 2	1080 lbs	24	11 lbs
EP2626-2	26 x 26 x 2	920 lbs	24	8 lbs
EP3030-2	30 x 30 x 2	1080 lbs	24	11 lbs
EP3036-2	30 x 36 x 2	1200 lbs	24	13 lbs
EP3232-2	32 x 32 x 2	1160 lbs	24	13 lbs
EP3434-2	34 x 34 x 2	1240 lbs	24	14 lbs
EP3636-2	36 x 36 x 2	1320 lbs	24	16 lbs
EP3648-2	36 x 48 x 2	1560 lbs	24	29 lbs
EP3842-2	38 x 42 x 2	1480 lbs	24	19 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
EP1838-3	18 x 38 x 3	1000 lbs	32	16 lbs
EP2424-3	24 x 24 x 3	840 lbs	16	9 lbs
EP2436-3	24 x 36 x 3	1080 lbs	16	19 lbs
EP2448-3	24 x 48 x 3	1320 lbs	32	14 lbs
EP3030-3	30 x 30 x 3	1080 lbs	15	20 lbs
EP3232-3	32 x 32 x 3	1160 lbs	15	21 lbs
EP3434-3	34 x 34 x 3	1240 lbs	15	17 lbs
EP3636-3	36 x 36 x 3	1320 lbs	16	28 lbs
EP3640-3	36 x 40 x 3	1400 lbs	16	31 lbs
EP3648-3	36 x 48 x 3	1560 lbs	16	36 lbs
EP3842-3	38 x 42 x 3	1480 lbs	16	33 lbs
EP3870-3	38 x 70 x 3	2040 lbs	16	36 lbs
EP4040-3	40 x 40 x 3	1480 lbs	16	34 lbs
EP4558-3	45 x 58 x 3	1940 lbs	16	33 lbs
EP4848-3	48 x 48 x 3	1800 lbs	16	29 lbs
EP5042-3	50 x 42 x 3	1720 lbs	16	28 lbs
EP5060-3	50 x 60 x 3	2080 lbs	16	40 lbs
EP5070-3	50 x 70 x 3	2280 lbs	16	47 lbs
EP5252-3	52 x 52 x 3	1960 lbs	16	48 lbs
EP5658-3	56 x 58 x 3	2160 lbs	16	43 lbs

HUNKLITE™

Solid concrete pad designed for use as external/ internal ground support for HVAC equipment. Where local codes supersede the national code and require a pad thicker than 2", use a 3" thick pad.

- No buoyancy — ideal for coastal regions
- Made in the USA
- Lightweight concrete and hollow bottom with rib support to add strength and remove weight to make easier to handle
- Will support concrete anchors
- ASTM D2299, ASTM C67



ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
2" THICK PADS				
L2436-2	24 x 36 x 2	1920 LBS	20	55 LBS
L3636-2	36 x 36 x 2	2400 lbs	15	120 lbs
3" THICK PADS				
L2424-3	24 x 24 x 3	1440 lbs	15	52 lbs
L2436-3	24 x 36 x 3	1920 lbs	15	106 lbs
L3030-3	30 x 30 x 3	1920 lbs	15	69 lbs
L3036-3	30 x 36 x 3	2160 lbs	15	94 lbs
L3048-3	30 x 48 x 3	2640 lbs	15	120 lbs
L3232-3	32 x 32 x 3	2080 lbs	15	87 lbs
L3636-3	36 x 36 x 3	2400 lbs	10	105 lbs
L3642-3	36 x 42 x 3	2640 lbs	10	120 lbs
L3648-3	36 x 48 x 3	2880 lbs	10	135 lbs
L3842-3	38 x 42 x 3	2720 lbs	10	215 lbs

HEAT PUMP PAD

Ideal for snowy climates, the Heat Pump Pad protects the unit with a full 8" clearance above ground. Standard with each unit are 8 anti-vibration pads specifically designed to fit into molded slots at tops of the Heat Pump Pad. These are designed to provide a more quiet operation of the heat pump.

- Pad base is angled outward to direct melting snow and condensate away from the unit
- Built tough for many years of surface
- Pads are nestable and stackable, using minimum space for storage



ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
HP3232-8	32 x 32 x 8	307 LBS	16	18 LBS
HP3636-8	36 x 36 x 8	389 lbs	16	18 lbs

ULTRALITE®

The lightest weight cement-based pad for ease of handling and proven durability.



- Heavy-duty, yet ultra-lightweight
- Freeze/thaw, UV, chemical & flame-resistant for long-term life outdoors
- Earthquake Code compliant pads available for use in the relevant West Coast locations
- ASTM D2299, ASTM C67
- Extensive selection of sizes available including wedge-shaped pad

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
UC1636-3	16 x 36 x 3	368 lbs	15	18 lbs
UC1838-3	18 x 38 x 3	400 lbs	30	20.2 lbs
UC1838-3CA	18 x 38 x 3	400 lbs	15	20.2 lbs
UC2424-3	24 x 24 x 3	336 lbs	15	18 lbs
UC2424-3CA	24 x 24 x 3	336 lbs	15	18 lbs
UC2430-3	24 x 30 x 3	390 lbs	15	23 lbs
UC2436-3	24 x 36 x 3	432 lbs	15	26 lbs
UC2436-3CA	24 x 36 x 3	432 lbs	15	26 lbs
UC2442-3	24 x 42 x 3	480 lbs	15	28 lbs
UC2448-3	24 x 48 x 3	528 lbs	15	28 lbs
UC2448-3CA	24 x 48 x 3	528 lbs	15	29 lbs
UC2626-3	26 x 26 x 3	368 lbs	15	17 lbs
UC3030-3	30 x 30 x 3	432 lbs	15	23 lbs
UC3030-3CA	30 x 30 x 3	432 lbs	15	24 lbs
UC3036-3	30 x 36 x 3	460 lbs	15	31 lbs
UC3036-3CA	30 x 36 x 3	460 lbs	15	30 lbs
UC3040-3	30 x 40 x 3	512 lbs	15	33 lbs
UC3132-3L	31 x 32 x 3	460 lbs	15	27 lbs
UC3232-3	32 x 32 x 3	464 lbs	15	26 lbs
UC3232-3CA	32 x 32 x 3	464 lbs	15	27 lbs
UC3237-3	32 x 37 x 3	504 lbs	15	27 lbs
U3353-3	33 x 53 x 3	595 lbs	15	68 lbs
UC3434-3	34 x 34 x 3	496 lbs	15	27 lbs
UC3445-3	34 x 45 x 3	584 lbs	15	39 lbs
UC3539-3L	35 x 39 x 3	528 lbs	15	36 lbs
UC3636-3	36 x 36 x 3	528 lbs	15	34 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
UC3636-3CA	36 x 36 x 3	528 lbs	15	35 lbs
U3642-3	36 x 42 x 3	576 lbs	15	32 lbs
UC3642-3CA	36 x 42 x 3	576 lbs	15	33 lbs
UC3648-3	36 x 48 x 3	624 lbs	15	37 lbs
UC3648-3CA	36 x 48 x 3	624 lbs	15	38 lbs
U3650-3	36 x 50 x 3	659 lbs	15	38 lbs
U3654-3	36 x 54 x 3	715 lbs	15	71 lbs
U3660-3	36 x 60 x 3	723 lbs	15	49 lbs
UC3842-3	38 x 42 x 3	592 lbs	15	35 lbs
U3865-3	38 x 65 x 3	701 lbs	15	85 lbs
U3870-3	38 x 70 x 3	709 lbs	15	113 lbs
UC4040-3	40 x 40 x 3	592 lbs	15	34 lbs
UC4040-3CA	40 x 40 x 3	592 lbs	15	35 lbs
UC4042-3	40 x 42 x 3	608 lbs	15	36 lbs
UC4044-3L	40 x 44 x 3	620 lbs	15	38 lbs
U4054-3	40 x 54 x 3	719 lbs	15	81 lbs
U4550-3	45 x 50 x 3	712 lbs	15	81 lbs
U4558-3	45 x 58 x 3	776 lbs	15	93 lbs
U4848-3	48 x 48 x 3	720 lbs	15	85 lbs
U4854-3	48 x 54 x 3	768 lbs	15	91 lbs
U4866-3	48 x 66 x 3	864 lbs	15	108 lbs
U5053-3	50 x 53 x 3	776 lbs	15	92 lbs
U5056-3	50 x 56 x 3	800 lbs	15	97 lbs
U5252-3	52 x 52 x 3	784 lbs	15	94 lbs
U5557-3	55 x 57 x 3	848 lbs	15	109 lbs

CLADLITE®

The strength and look of a perfectly poured concrete pad without the extreme weight!



- High PSI strength concrete surrounding a lightweight core
- Up to 80% lighter than solid concrete for ease of installation
- Freeze/thaw, UV, chemical & flame resistant for long-term life outdoors
- ASTM D2299, ASTM C67
- Extensive selection of sizes available including round pads

2" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
2436-2	24 x 36 x 2	576 lbs	24	61 lbs
2442-2	24 x 42 x 2	648 lbs	24	57 lbs
3030-2	30 x 30 x 2	576 lbs	24	36 lbs
3036-2	30 x 36 x 2	648 lbs	12	43 lbs
3040-2	30 x 40 x 2	696 lbs	12	53 lbs
3232-2	32 x 32 x 2	624 lbs	12	44 lbs
3434-2	34 x 34 x 2	672 lbs	12	51 lbs
3636-2	36 x 36 x 2	720 lbs	12	63 lbs
3640-2	36 x 40 x 2	768 lbs	12	71 lbs
3648-2	38 x 48 x 2	864 lbs	12	88 lbs

3" THICK PADS

ITEM #	SIZE (IN.)	ESTIMATED ALLOWABLE LOAD	QTY. PER PALLET	PAD WEIGHT
1636-3	16 x 36 x 3	480 lbs	20	48 lbs
2424-3	24 x 24 x 3	432 lbs	20	43 lbs
2436-3	24 x 36 x 3	576 lbs	20	60 lbs
2448-3	24 x 48 x 3	720 lbs	20	84 lbs
3030-3	30 x 30 x 3	576 lbs	20	62 lbs
3036-3	30 x 36 x 3	648 lbs	10	73 lbs
3232-3	32 x 32 x 3	624 lbs	10	68 lbs
3237-3	32 x 37 x 3	648 lbs	10	73 lbs
3636-3	36 x 36 x 3	720 lbs	10	80 lbs
3640-3	36 x 40 x 3	768 lbs	10	97 lbs
3648-3	36 x 48 x 3	864 lbs	10	109 lbs
3660-3	36 x 60 x 3	1008 lbs	10	163 lbs
3842-3	38 x 42 x 3	816 lbs	10	120 lbs
4042-3	40 x 42 x 3	840 lbs	10	158 lbs
4550-3	45 x 50 x 3	996 lbs	10	184 lbs
4558-3	45 x 58 x 3	1092 lbs	10	203 lbs
4766-3	47 x 66 x 3	212 lbs	10	219 lbs
4848-3	48 x 48 x 3	1008 lbs	10	1884 lbs
5053-3	50 x 53 x 3	1092 lbs	10	197 lbs

THE HURRICANE PAD™ H-CLASS

The Hurricane Pad™ equipment pads are designed specifically for all Florida counties in hurricane wind zones up to 75 mph. Check with your local DiversiTech® distributor or our online Hurricane Selector Tool to confirm the proper pad for your application.

- 3 different levels of pads for different wind zones: up to 150 MPH, up to 175 MPH, and 175 MPH Miami-Dade
- 175 MPH Miami-Dade units are solid concrete pads with internal steel (larger units) and fibers reinforcement
- Superior screw pull out strength
- ASTM D2299, ASTM C67

150 MPH RATING

ITEM #	SIZE (IN.)	QTY. PER PALLET	ESTIMATED ALLOWABLE LOAD
H1840-4	18 x 40	16	552
H2424-4	24 x 24	16	432
H2436-4	24 x 36	8	576
H2448-4	24 x 48	8	576
H3030-4	30 x 30	8	576
H3232-4	32 x 32	8	624
H3636-4	36 x 36	8	720
H3642-4	36 x 42	8	792
H3648-4	36 x 48	8	864
H3652-4	36 x 52	8	912
H3654-4	36 x 54	8	936
H3656-4	36 x 56	8	960
H3672-4	36 x 72	8	1152
H3852-4	38 x 52	8	936
H3865-4	38 x 65	8	1092
H3872-4	38 x 72	8	1176
H4040-4	40 x 40	8	816
H4242-4	42 x 42	8	864
H4558-4	45 x 58	8	1092
H5557-4	55 x 57	8	1200

Wind Tables: Visit diversitech.com



Potential Hurricane Winds Map

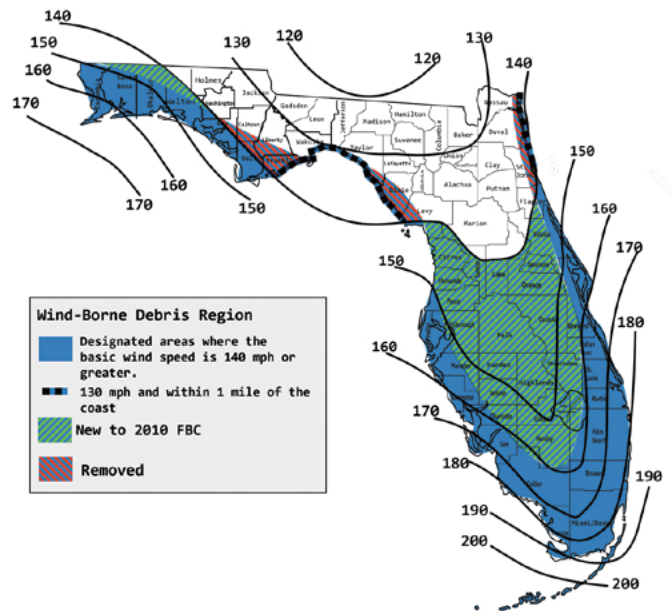


Figure 1609B Risk Category IV Buildings and Structures and Category III healthcare facilities

THE HURRICANE PAD™ T-CLASS & MD

175 MPH RATING

ITEM #	SIZE (IN.)	QTY. PER PALLET	ESTIMATED ALLOWABLE LOAD
HT1840-4	18 x 40	10	1104
HT2436-4	24 x 36	5	1152
HT2448-4	24 x 48	5	1152
HT3030-4	30 x 30	5	1152
HT3232-4	32 x 32	5	1248
HT3636-4	36 x 36	5	1440
HT3648-4	36 x 48	5	1728
HT4040-4	40 x 40	5	1632
HT4242-4	42 x 42	5	1728
HT4558-4	45 x 58	5	2184

Wind Tables: Visit diversitech.com



175 MPH RATING - MIAMI-DADE

ITEM #	SIZE (IN.)	QTY. PER PALLET	ESTIMATED ALLOWABLE LOAD
HMD1840-4	18 x 40 x 4	5	1104
HMD2448-4	24 x 48 x 4	5	1152
HMD3030-4	30 x 30 x 4	5	1152
HMD3636-4	36 x 36 x 4	5	1440
HMD3648-4	36 x 48 x 4	5	1728
HMD4040-4	40 x 40 x 4	5	1632
HMD4242-4	42 x 42 x 4	5	2998

Wind Tables: Visit diversitech.com





BUY HVAC/R PRODUCTS, GET REWARDED

ENROLL

Sign Up at
ContractorRewards.com

Scan for
Details



UPLOAD

Upload receipts
for purchases of
DiversiTech
products.

GET REWARDED

Shop the extensive
online REWARDS
catalog.

IT'S THAT EASY!



EQUIPMENT MOUNTING SOLUTIONS

DiversiTech Corporation
Duluth, GA 30097
P 800.995.2222
F 678.542.3700

LIT-CAT-EM
1225
©2026 DiversiTech Corp.
diversitech.com



SIMPLIFY YOUR WORK®