



DIRECT DRIVE & CONDENSER FAN MOTORS

Direct Drive - Multi-Horsepower Motors

Part #	HP	Spd.	RPM	Voltage	Amps	Capacitor (370V)			Bearings	Leads	Dia	Shaft
R6-R43600	1/2	All	1075	115	7.0	10 mfd			Sleeve	26"	4.86"	1/2"x5"
	1/3	All			6.7	5	mfd	7.5*				
	1/4	Lo, Med-Lo, Med-Hi			4.4							
	1/5	Low, Med-Lo			3.2							
	1/6	Lo			2.4							
R6-R43601	1/2	All	1075	208-230	3.9				10 mfd			Sleeve
	1/3	All			3.6	5	mfd	7.5*				
	1/4	Lo, Med-Lo, Med-Hi			2.5							
	1/5	Lo, Med-Lo			1.8							
	1/6	Lo			1.3							
R6-R43602 <i>NEW!</i>	3/4	All	1075	115	9.1				10 mfd			Ball
	1/2	All			6.8	5	mfd	7.5*				
	1/3	All			5.5							
	1/4	Lo, Med-Lo, Med-Hi			3.0							
	1/5	Lo, Med-Lo			2.3							
R6-R43603 <i>NEW!</i>	3/4	All	1075	208-230	3.9				10 mfd			Ball
	1/2	All			3.6	5	mfd	7.5*				
	1/3	All			3.0							
	1/4	Lo, Med-Lo, Med-Hi			2.3							
	1/5	Lo, Med-Lo			2.0							

* Motor is approximately 10% stronger and has higher starting torque for 1/6, 1/5, 1/4 and 1/3 HP rating with the 7.5 mfd 370VAC capacitor.

**Open Dripproof
40°C Ambient**



Features

- LESS INVENTORY REQUIRED!
- VERSATILE!
- TIME SAVER!
- EASY INSTALLATIONS!

- Energy Efficient
- Different Capacitor/Speed Combos
- Designed for 370V Cap (not incl.)
- Permanent Split Capacitor
- Ball and Sleeve Bearing
- Reversible Rotation
- Resilient Rings (Direct Drive)
- Extended Thru Bolts
- Automatic Protector
- Class B Insulation
- 48 Frame
- Single Phase
- Continuous Duty-Over Air
- Mounts by Belly Band, Thru Bolts or Shell Holes
- Rheem Mounting Holes in Shell
- 60 Hz

Condenser Fan - Multi-Horsepower Motors

Part #	HP	Spd.	RPM	Voltage	Amps	Cap. (370V)		Bearings	Leads	Dia.	Shaft	
						208V	230V					
M2-R22601 <i>NEW!</i>	1/3	High	825	208-230	1.9	10	mfd	7.5	Ball	36"	5.24"	1/2"x5"
	1/4				1.5							
	1/5	Low			1.2							
	1/6				1.0							
M2-R22603 <i>NEW!</i>	1/2	High	825	208-230	2.4	12.5	mfd	10	Ball	36"	5.61"	1/2"x6"
	1/3				1.7							
	1/4	Low			1.4							
	1/5				1.1							
M2-R22600	1/3	High	1075	208-230	2.8	7.5	mfd	5	Sleeve	36"	4.86"	1/2"x6"
	1/4				2.0							
	1/5	Low			1.7							
	1/6				1.5							
M2-R22605 <i>NEW!</i>	1/3	High	1075	208-230	2.8	7.5	mfd	5	Ball	36"	4.86"	1/2"x6"
	1/4				2.0							
	1/5	Low			1.7							
	1/6				1.5							
M2-R22602 <i>NEW!</i>	1/2	High	1075	208-230	3.9	12.5	mfd	10	Ball	36"	5.24"	1/2"x5"
	1/3				2.2							
	1/4	Low			1.6							
	1/5				1.3							
M2-R22604 <i>NEW!</i>	3/4	High	1075	208-230	5.3	15	mfd	12.5	Ball	36"	5.87"	1/2"x6"
	1/2				3.0							
	1/3	Low			1.9							
	1/4				1.0							

**Totally Enclosed
Air Over
60°C Ambient**



Condenser Fan - 4-in-1 Replacement


60°C Ambient

Features

- Multi-application, 1/3 Hp to 1/6 Hp, Condenser Fans
- Available in sleeve bearing or ball bearing
- Short 4" body
- All positions
- Rheem mounting holes and screws supplied
- Reliable sleeve bearings

Replacement For:
 Emerson
 K55HXTDD-8385
 Catalog No. 5458
 Consolidator II

Rheem
 1/6 Hp, 51-20668-11
 1/5 Hp, 51-23055-11
 1/4 Hp, 51-23054-11
 1/3 Hp, 51-23053-11

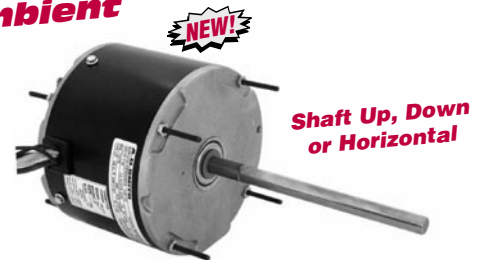

**Shaft Up, Down
or Horizontal**

Part #	HP	Voltage	Amps	Capacitor	RPM	Rotation	Encl.	Mount	Body	Bearing	Shaft
M2-R22401	1/3-1/6	208-230	2.0	7.5/370V	1075	Revers.	T.E.	Belly Band, ThruBolts or Shell Holes	4.00"	Sleeve	6.5" x 1/2"
M2-R22402	1/3-1/6	208-230	2.0	7.5/370V	1075	Revers.	T.E.		4.00"	Ball	6.5" x 1/2"